


**INDUSTRIAL CABLE
 REELS**
 SERIE 9000

ART. 9004

Length (m)
6

Cross-section (mm²)
1.5


Wound cable capacity (@20°C)
1,4 KW @ 230V



TECHNICAL DATA

Article	Cable length (m)	Reel cable length (m)	Cut length (m)	Cross-section (mm ²)	Wound cable capacity (@20°C)	Unwound cable capacity (@20°C)	Cable diameter (mm)	Thermal switch	V max	Cable type
9004	6	5	1	1.5	1,4 KW @ 230V	1,9 KW @ 230V	7.5	YES	500	PVC

OVERALL DIMENSIONS

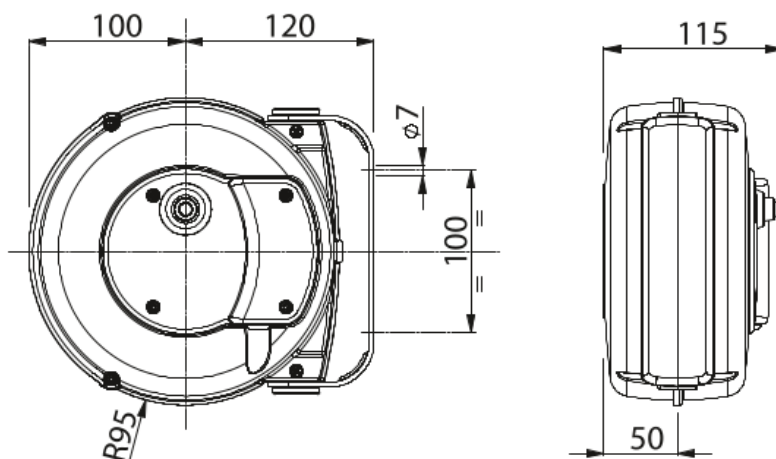

Technical features

- Small size.
- External structure in shockproof plastic.
- Cable stop device with rack that can be inserted every 50cm.
 The stopping device can be easily removed if the cable is to be constantly pulled.
- Ambient temperature of use: $-5^{\circ}\text{C} / +50^{\circ}\text{C}$.
- Sliding contacts with collector ring and brushes.
- Degree of protection IP42.
- Double ground contact.
- Collector insulation voltage 2.5 KV.
- Supplied without piece on the power supply side.