

5 5 Years
Product Warranty
UK Only

3 3 Years
On-Site Warranty
Main-land UK Only

DD 2

09054 DD218/4P-SCT

LED DD 2 4pin 9/12/15/18W 2700/4000/6500K

- Wattage switchable 9W/12W/15W/18W
- Save energy by up to 65%
- Colour temperature switchable 2700K/4000K/6500K
- Replacement for 16W, 28W, 38W fluorescent DD lamps used with magnetic ballast
- Plug in dusk to dawn and corridor sensor
- Compatible with Kosnic emergency module for instant conversion
- Flicker free

Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Installation Area	Internal

Compliance

LVD	EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	DD218/4P-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	2.85 A / 40 µs
Settable Wattages	9W, 12W, 15W, 18W
Power Factor	0.97
Settable Colour Temperatures	2700K, 4000K, 6500K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<2%
Lumens Output Maximum	2,570 lm
Maximum Efficiency	143 lm/W
Maintained Luminous Flux	183 lm
L70B50 Lifetime (h) @Ta 25 °C	30,000 h
Nominal Lifetime (h)	30,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.17Kg
Dimensions (L x W x D) (mm)	192x192x35
Beam Angle - Lumi (°)	120
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

5 5 Years
Product Warranty
UK Only

3 3 Years
On-Site Warranty
Main-land UK Only

DD 2



09054 DD218/4P-SCT

Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings.

IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	30,000 h
Installation Area	Internal


Optional Gear

Product Code	Description	Type
RMW-DC	Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor
EMDD02	2W standard emergency module for LED DD and bulkhead	Emergency Module
EMDD02/ST	2W self-test emergency module for LED DD and bulkhead	Self-test Emergency Module

Accessories

Product Code	Description	Type
DDLAMPHLD	LED DD Lamp holder for 4pin GR10q	Housing

RMT-UNI		Universal Remote Control for Kosnic motion sensors			Remote Control
Power (W)	Current (mA)	CCT (K)	Power Factor	Lumen (lm)	
9	42	2700	0.93	1160	
9	42	4000	0.93	1210	
9	42	6500	0.93	1200	
12	55	2700	0.95	1570	
12	55	4000	0.95	1680	
12	55	6500	0.95	1670	
15	67	2700	0.97	1980	
15	67	4000	0.97	2140	
15	67	6500	0.97	2110	
18	81	2700	0.97	2320	
18	81	4000	0.97	2570	
18	81	6500	0.97	2490	

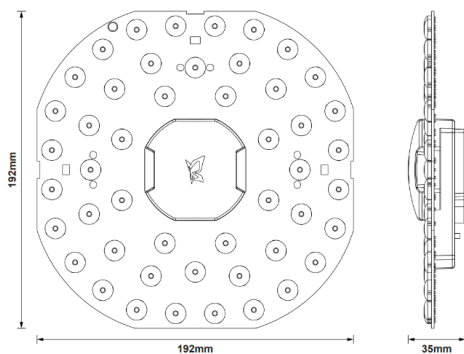

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

5 5 Years
Product Warranty
UK Only

3 3 Years
On-Site Warranty
Main-land UK Only

DD 2

09054 DD218/4P-SCT



Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings.

IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	30,000 h
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

