

RCD IN-LINE ACTIVE - 30mA

-PowerBreaker-

The PowerBreaker J62 provides added personal protection against electrocution when using electrical equipment in adverse conditions. The unit has double pole protection and is re-wireable. For use in adverse conditions, such as building sites, plant applications, industrial manufacturing, where water presents a danger and rough handling is expected. Also trips on loss of power supply, preventing unexpected start up of equipment.


- Suitable for BS/European power supply systems
- Robust construction
- Double pole breaking
- Mechanical flag to indicate contact position
- Separate test and reset buttons



J62-Y



J62-T

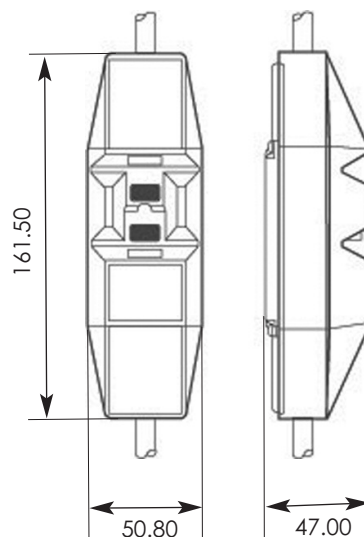

	J62-T	J62-Y
Product Finish	Orange	Yellow
Barcode	5012739606441	5012739606458
Voltage	240V AC 50Hz/60Hz	110V AC 50Hz/60Hz
Max Operating Current	16A	
Product Dimensions	H161.50 X W50.80 X D47mm	
Product weight	420g	
IP Rating	IP65 Note: to ensure the IP rating, terminals and cover should be sealed with the supplied sealant (2 x 14ml tubes)	
Cable Type	Cable - 1.5mm ² 3 Core Flexible Cable (Dia 7.62 - 11.7mm)	
Rated Trip Current	30mA	
Typical Trip Speed	<40mS	
RCD Contact break	Double Pole	
Latching	Active - Electrical, needs resetting after power loss	
Responsive to	Pulsating DC earth faults	
Main housing material	Polycarbonate	
Guarantee	1 Year	
Certification & Conformity	IEC 61540	

**GREEN
BROOK**
ELECTRICAL

Tel +44 (0) 1279 772 772

Fax +44 (0) 1279 422 007

www.greenbrook.co.uk

