

16 	110	50 - 60	1265	4	1268	4	1274	4
	240	50 - 60	1266	6	1269	9	1275	9
	415	50 - 60	1267	9	1270	6	1276	6
32 	110	50 - 60	1277	4	1280	4	1286	4
	240	50 - 60	1278	6	1281	9	1287	9
	415	50 - 60	1279	9	1282	6	1288	6



Panel Mounting Socket Outlet

 Watertight
20° Angle

63 	110	50 - 60	12000	4	12003	4	12004	4
	240	50 - 60	12001	6	1205	9	1206	9
	415	50 - 60	12002	9	1200	6	129	6
125 	110	50 - 60	1299	4	12102	4	12106	4
	240	50 - 60	12100	6	12103	9	12107	9
	415	50 - 60	12101	9	12104	6	12108	6



Panel Mounting Socket Outlet

 Watertight
15° Angle

16 	110	50 - 60	1356	4	1359	4	1365	4
	240	50 - 60	1357	6	1360	9	1366	9
	415	50 - 60	1358	9	1361	6	1367	6



Panel Mounting Socket Outlet

 Watertight
Straight

16 	110	50 - 60	1371	4	1374	4	1380	4
	240	50 - 60	1372	6	1375	9	1381	9
	415	50 - 60	1373	9	1376	6	1382	6
32 	110	50 - 60	13023	4	13026	4	1368	4
	240	50 - 60	13024	6	13027	9	1369	9
	415	50 - 60	13025	9	13028	6	1370	6



Panel Mounting Socket Outlet

 Watertight
Straight

63 	110	50 - 60	1395	4	1398	4	13102	4
	240	50 - 60	1396	6	1399	9	13103	9
	415	50 - 60	1397	9	13100	6	13104	6
125 	110	50 - 60	13445	4		4		4
	240	50 - 60	13452	6		9		9
	415	50 - 60		9	13447	6	13451	6



Panel Mounting Socket Outlet

 Watertight
Straight


16A and 32A with screw terminals

63A and 125A with screw / clamp terminals and pilot contact

Note: This pilot contact should **NOT** be counted as a main 'pin'

Other voltages and frequencies are available on request. Contact CEE Norm UK for further details

Dimensions




Amperes Poles	16			32		
	3	4	5	3	4	5
a	74	100	100	100	100	100
b	62	92	92	92	92	92
c	60	85	85	85	85	85
d	52	77	77	77	77	77
e	5.5	5.5	5.5	5.5	5.5	5.5
f	8	8	8	8	8	8
h	30	28.5	29	50	50	34
i	55	57.5	60	67	67	69
k	57	65	70	75	75	78
l	52	65	70	75	75	78
a	20°	20°	20°	20°	20°	20°
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Socket Outlet

20° Angle

☼☼ Watertight
IP67




Amperes Poles	63			125		
	3	4	5	3	4	5
a	114	114	114	114	114	114
b	114	144	114	114	114	114
c	90	90	90	90	90	90
d	90	90	90	90	90	90
e	6.5	6.5	6.5	6.5	6.5	6.5
f	12	12	12	12	12	12
h	65	65	64	82	82	82
j	80	80	80	90	90	90
k	92	92	92	92	92	92
l	92	92	92	104	104	104
Conductor mm² min	6	6	6	25	25	25
Conductor mm² max	25	25	25	70	70	70

Panel Mounting Socket Outlet

15° Angle temperature
resistant contact-carrier


☼☼ Watertight
IP67

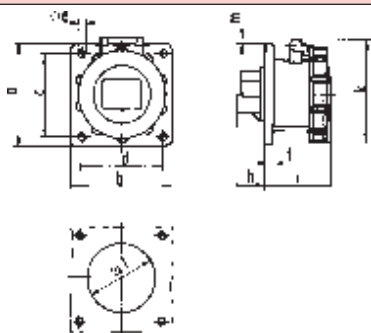

Amperes Poles	16		
	3	4	5
a	62	72	72
b	62	65	65
c	47	52	52
d	47	52	52
e	5.5	5.5	5.5
f	7	7	7
h	17	26	17
i	57	58	57
k	76	83	93
l	45	45	55
m	10	9	13
Conductor mm² min	1.5	1.5	1.5
Conductor mm² max	4	4	4

Panel Mounting Socket Outlet


☼☼ Watertight
IP67

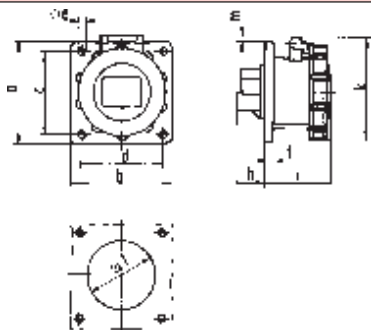

Amperes Poles	16			32		
	3	4	5	3	4	5
a	75	75	75	75	75	75
b	75	75	75	75	75	75
c	60	60	60	60	60	60
d	60	60	60	60	60	60
e	5.5	5.5	5.5	5.5	5.5	5.5
f	7	7	7	8	8	8
h	17	26	17	36	36	19
i	57	58	57	65	65	65
k	76	83	93	100	100	106
l	45	45	55	60	60	60
m	3.5	7	11.5	12	12	17
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Socket Outlet

☼☼ Watertight
IP67

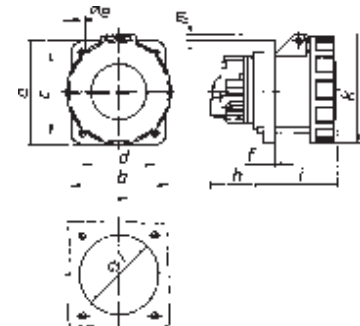

Amperes Poles	63			125		
	3	4	5	3	4	5
a	107	107	107	120	120	120
b	100	100	100	120	120	120
c	85	85	85	100	100	100
d	77	77	77	100	100	100
e	6.5	6.5	6.5	6.5	6.5	6.5
f	12	12	12	21	21	21
h	56.5	56.5	56.5	50	50	50
i	76	76	76	117	117	117
k	113	113	113	129	129	129
l	88	88	88	84	84	84
m	7	7	7	6	6	6
Conductor mm² min	6	6	6	25	25	25
Conductor mm² max	25	25	25	70	70	70

Panel Mounting Socket Outlet

Temperature resistant
contact-carrier

☼☼ Watertight
IP67