

PANEL MOUNTING SOCKET OUTLETS, angled

- IEC 60309-1/2, EN 60309, VDE 0623
- Protection degree IP67

Panel Mounting Socket Outlet


- Screw terminals
- 15° angled
- Flange 114 x 114 mm
- Kontex contact
- Nickel plated contacts
- Box terminals
- Protection degree IP67

	3	4	5							
	2P+E	3P+E	3P+N+E							
	Ampere	Poles		110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty each
	3pol 4pol 5pol	4h 4h 4h	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	
63	3	12000	12001	12002						5 475
63	4	12003	12005	1200	1203	12035	12233			5 510
63	5	12004	12006	129	12039	12389	12171			5 550

Products with PILOT please add "P" to the ref.no.



Fig.: Type 129

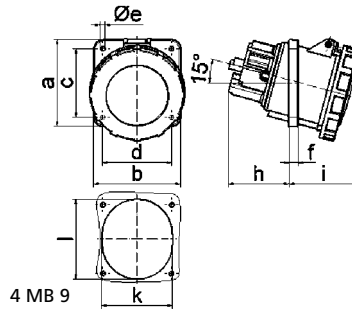

Ampere Poles	63	63	63							
	3	4	5							
a	114.0	114.0	114.0							
b	114.0	114.0	114.0							
c	90.0	90.0	90.0							
d	90.0	90.0	90.0							
e ø	6.5	6.5	6.5							
f	12.0	12.0	12.0							
h	65.0	65.0	65.0							
i	80.0	80.0	80.0							
k	92.0	92.0	92.0							
l	92.0	92.0	92.0							
Cond. mm² min	6	6	6							
Cond. mm² max	25	25	25							


Panel Mounting Socket Outlet Quick-Connect TE

- Screwless terminals
- 15° angled
- Flange 114 x 114 mm
- High-temperature-resistant contact carrier
- Kontex contact
- Nickel plated contacts
- Box terminals
- Protection degree IP67

	3	4	5							
	2P+E	3P+E	3P+N+E							
	Ampere	Poles		110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty each
	3pol 4pol 5pol	4h 4h 4h	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	
63	4			120322	120387					5 625
63	5			120307						5 670



Fig.: Type 120307

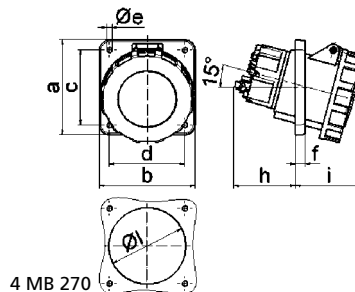

Ampere Poles	63	63								
	4	5								
a	114.0	114.0								
b	114.0	114.0								
c	90.0	90.0								
d	90.0	90.0								
e ø	6.5	6.5								
f	12.0	12.0								
h	74.0	74.0								
i	80.0	80.0								
l ø	92.0	92.0								
Cond. mm² min	6	6								
Cond. mm² max	25	25								

Panel Mounting Socket Outlet


- Screw terminals
- 15° angled
- Flange 114 x 114 mm
- High-temperature-resistant contact carrier
- Nickel plated contacts
- Kontex contact
- Box terminals
- Protection degree IP67

	3	4	5							
	2P+E	3P+E	3P+N+E							
	Ampere	Poles		110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty each
	3pol 4pol 5pol	4h 4h 4h	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	3pol 4pol 5pol	
125	3	1299	12100	12101						5 805
125	4	12102	12103	12104	12105	12320	12278			5 885
125	5	12106	12107	12108	12133	12334	12055			5 980

Products with PILOT please add "P" to the ref.no.



Fig.: Type 12108

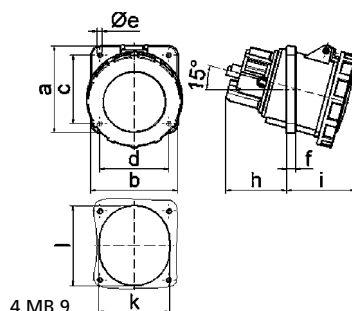

Ampere Poles	125	125	125							
	3	4	5							
a	114.0	114.0	114.0							
b	114.0	114.0	114.0							
c	90.0	90.0	90.0							
d	90.0	90.0	90.0							
e ø	6.5	6.5	6.5							
f	12.0	12.0	12.0							
h	82.0	82.0	82.0							
i	90.0	90.0	90.0							
k	92.0	92.0	92.0							
l	105.0	105.0	105.0							
Cond. mm² min	25	25	25							
Cond. mm² max	70	70	70							