

SURFACE MOUNTING APPLIANCE INLETS

- IEC 60309-1/2, EN 60309, VDE 0623
- Protection degree IP44


Surface Mounting Appliance Inlet

- Screw terminals
- With hinged lid
- Protection degree IP44

	 2P+E Ampere	 3P+E Poles	 3P+N+E Poles	110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	 Qty	g each
	16	5		2469	2470	2471				10	270
	32	3		24335	24017					10	335
	32	4				24018	24019			10	330
	32	5				24012				10	350



Fig.: Type 24012

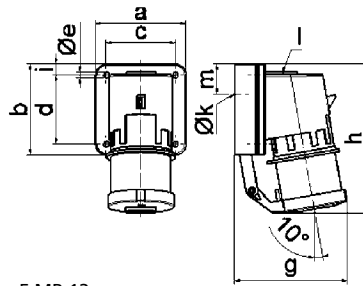

5 MB 12

Ampere	16	32	32	32					
Poles	5	3	4	5					
a	84.0	90.0	90.0	90.0					
b	84.0	75.0	75.0	75.0					
c	64.0	78.0	78.0	78.0					
d	64.0	45.0	45.0	45.0					
e	5.5	5.5	5.5	5.5					
g	105.0	114.0	114.0	115.0					
h	138.0	149.0	149.0	150.0					
i	10.0	13.0	13.0	13.0					
k	23.0	29.0	29.0	29.0					
l	M20	M25	M25	M25					
m	28.0	27.0	27.0	27.0					
Cond. mm² min	1	2.5	2.5	2.5					
Cond. mm² max	2.5	6	6	6					


Surface Mounting Appliance Inlet Quick-Connect TE

- Screwless terminals
- With hinged lid
- High-temperature-resistant contact carrier
- Nickel plated contacts
- Protection degree IP44

	 2P+E Ampere	 3P+E Poles	 3P+N+E Poles	110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	 Qty	g each
	16	5				24414				10	270
	32	5				24415				10	370



Fig.: Type 24415

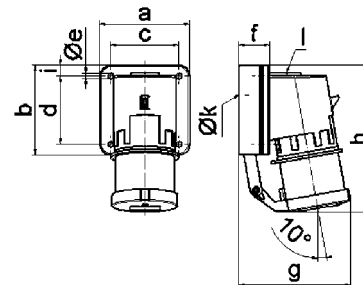

5 MB 96

Ampere	16	32							
Poles	5	5							
a	84.0	90.0							
b	84.0	75.0							
c	64.0	78.0							
d	64.0	45.0							
e	5.5	5.5							
f	29.0	29.0							
g	105.0	115.0							
h	138.0	150.0							
i	10.0	13.0							
k	23.0	29.0							
l	M20	M25							
Cond. mm² min	1	2.5							
Cond. mm² max	2.5	6							