

16	110	50 - 60	244	4	247	4	2413	4
	240	50 - 60	245	6	248	9	2414	9
	415	50 - 60	246	9	249	6	2415	6



Surface Mounting
Appliance Inlet

 Splashproof

32	110	50 - 60	24167	4	24170	4	24176	4
	240	50 - 60	24168	6	24171	9	24177	9
	415	50 - 60	24169	9	24172	6	24144	6

16A and 32A with screw terminals



Surface Mounting
Appliance Inlet

 Splashproof

63	110	50 - 60						
	240	50 - 60	24336	6				
	415	50 - 60			24205	6	24134	6

63A with screw / clamp terminals and pilot contact

Note: This pilot contact should **NOT** be counted as a main ‘pin’



Surface Mounting
Appliance Inlet

 Splashproof

16	240	50 - 60	240	6				
----	-----	---------	-----	---	--	--	--	--

16	240	50 - 60	242	6	As above with hinged lid			
----	-----	---------	-----	---	--------------------------	--	--	--



Surface Mounting
Appliance Inlet

 Splashproof

As above with hinged lid

16	110	50 - 60	2460	4	2463	4	2469	4
	240	50 - 60	2461	6	2464	9	2470	9
	415	50 - 60	2462	9	2465	6	2471	6
32	110	50 - 60	24335	4		4		4
	240	50 - 60	24017	6		9		9
	415	50 - 60		9	24018	6	24012	6

16A and 32A with screw terminals




Surface Mounting
Appliance Inlet

 Splashproof

With hinged lid

Dimensions

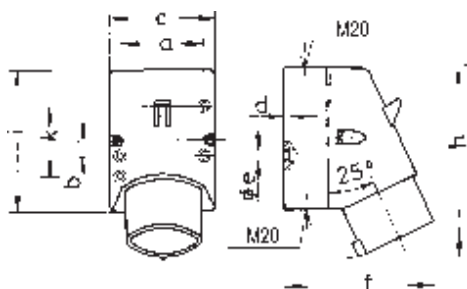


Amperes	16		
Poles	3	4	5
a	51	59	59
b	-	11	11
c	64	75	75
d	4	4	4
Ø e	4.1	5.1	5.1
f	93	106	110
h	122	135	135
i	87	100	100
k	40	-	-
Conductor mm² min	1	1	1
Conductor mm² max	2.5	2.5	2.5

Surface Mounting Appliance Inlet



Splashproof

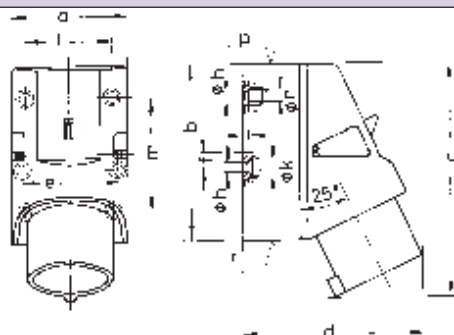


Amperes	32		
Poles	3	4	5
a	83	83	83
b	126	126	126
c	165	165	166
d	128	128	130
e	68	68	68
f	11	11	11
Ø h	5.5	5.5	5.5
i	6.5	6.5	6.5
Ø k	12	12	12
l	65	65	65
m	80	80	80
Ø n	10	10	10
p	M25	M25	M25
r	2xM25	2xM25	2xM25
Conductor mm² min	2.5	2.5	2.5
Conductor mm² max	6	6	6

Surface Mounting Appliance Inlet



Splashproof

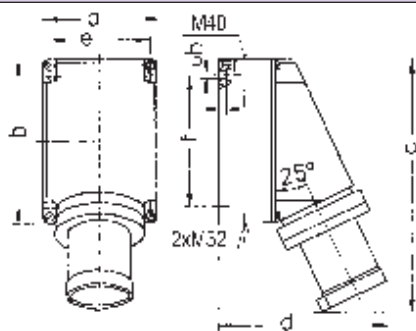


Amperes	63		
Poles	3	4	5
a	118	118	118
b	170	170	170
c	259	259	259
d	174	174	174
e	104	104	104
f	136	136	136
Ø h	6.1	6.1	6.1
i	6	6	6
Conductor mm² min	6	6	6
Conductor mm² max	16	16	16

Surface Mounting Appliance Inlet




Splashproof




Amperes	16
Poles	3
a	56.5
b	60
c	93
d	73
e	29.5
f	23.5
Ø h	5.5
i	3
Conductor mm² min	1
Conductor mm² max	2.5

With hinged lid

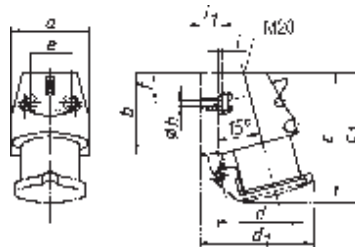


Amperes	16
Poles	3
a	56.5
b	60
c	93
c1	97.5
d	73
d1	84
e	29.5
f	23
Ø h	5.5
i	3
i1	16
Conductor mm² min	1
Conductor mm² max	2.5



Amperes	16
Poles	3
a	64
b	87
c	138
d	111
e	51
f	-
Ø h	4.1
i	4.5
k	40
l	M20
m	M20
Conductor mm² min	1
Conductor mm² max	2.5

With hinged lid

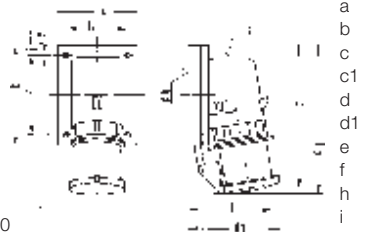

Amperes	16	32
Poles	5	3
a	84	90
b	84	75
c	129	138
c1	138	149
d	101	110
d1	105	114
e	5.5	5.5
f	64	45
h	64	78
i	-	13
Ø k	23	29
l	M20	M25