

EXTRA-LOW VOLTAGE PLUGS AND SOCKETS

- IEC 60309, VDE 0623
- Protection degree IP44


Surface Mounting Socket Outlet

- Screw terminals
- Cable entry 1x at top (open)
- Protection degree IP44

Ampere	Poles	24V 50-60 Hz	42V 50-60 Hz	100-200Hz bis 50V	300Hz bis 50V	400Hz bis 50V	bis 50V	Qty	g each
		---	12h	4h	2h	3h	10h		
16	2	410	411	412	413	414	415	10	180
16	3	416	417	418	419	4110	4107	10	195
32	2	4111	4112	4113	4114	4115	4116	10	180
32	3	4117	4118	4119	4120	4121	4157	10	195



Fig.: Type 4118

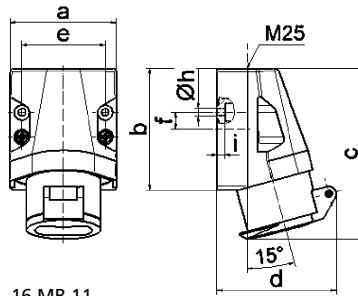

16 MB 11

Ampere Poles	16 2	16 3	32 2	32 3
a	70.0	70.0	70.0	70.0
b	80.0	80.0	80.0	80.0
c	113.0	113.0	113.0	113.0
d	80.0	80.0	80.0	80.0
e	55.0	55.0	55.0	55.0
f	11.0	11.0	11.0	11.0
h Ø	5.2	5.2	5.2	5.2
i	5.0	5.0	5.0	5.0
Cond. mm² min	4	4	4	4
Cond. mm² max	10	10	10	10


Panel Mounting Socket Outlet

- Screw terminals
- Straight
- Flange 55 x 55 mm
- Protection degree IP44

Ampere	Poles	24V 50-60 Hz	42V 50-60 Hz	100-200Hz bis 50V	300Hz bis 50V	400Hz bis 50V	bis 50V	Qty	g each
		---	12h	4h	2h	3h	10h		
16	2	430	431	432	433	434	435	10	110
16	3	436	437	438	439	4310	4390	10	125
16	2	4311	4312	4313	4314	4315	4316	10	110
16	3	4317	4318	4319	4320	4321		10	125



Fig.: Type 4318

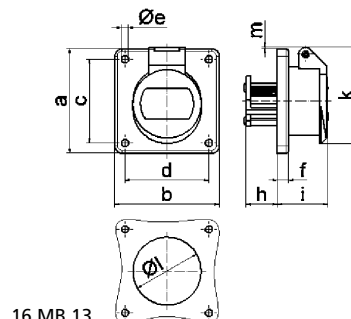

16 MB 13

Ampere Poles	16 2	16 3	32 2	32 3
a	55.0	55.0	55.0	55.0
b	55.0	55.0	55.0	55.0
c	45.0	45.0	45.0	45.0
d	45.0	45.0	45.0	45.0
e Ø	5.2	5.2	5.2	5.2
f	6.0	6.0	6.0	6.0
h	22.0	22.0	22.0	22.0
i	37.0	37.0	37.0	37.0
k	67.0	67.0	67.0	67.0
l Ø	49.0	49.0	49.0	49.0
m	12.0	12.0	12.0	12.0
Cond. mm² min	4	4	4	4
Cond. mm² max	10	10	10	10


Panel Mounting Socket Outlet

- Screw terminals
- Straight
- Flange 75 x 75 mm
- Protection degree IP44

Ampere	Poles	24V 50-60 Hz	42V 50-60 Hz	100-200Hz bis 50V	300Hz bis 50V	400Hz bis 50V	bis 50V	Qty	g each
		---	12h	4h	2h	3h	10h		
16	2	4354	4355	4356	4357	4358	4359	10	130
16	3	4360	4361	4362	4363	4364	43003	10	150
32	2	4365	4366	4367	4368	4369	4370	10	130
32	3	4371	4372	4373	4374	4375		10	150



Fig.: Type 4372

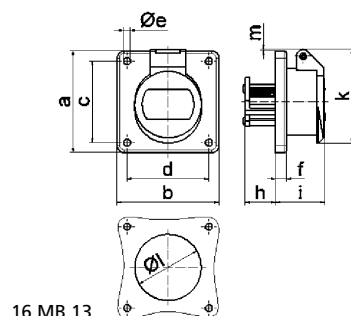

16 MB 13

Ampere Poles	16 2	16 3	32 2	32 3
a	75.0	75.0	75.0	75.0
b	75.0	75.0	75.0	75.0
c	60.0	60.0	60.0	60.0
d	60.0	60.0	60.0	60.0
e Ø	5.2	5.2	5.2	5.2
f	6.0	6.0	6.0	6.0
h	22.0	22.0	22.0	22.0
i	37.0	37.0	37.0	37.0
k	67.0	67.0	67.0	67.0
l Ø	49.0	49.0	49.0	49.0
m	2.0	2.0	2.0	2.0
Cond. mm² min	4	4	4	4
Cond. mm² max	10	10	10	10