




MZ201

All auxiliaries are common to both single and multi-pole 10kA circuit breakers and RCCBs.

Connection capacity  
4mm<sup>2</sup> flexible  
6mm<sup>2</sup> rigid

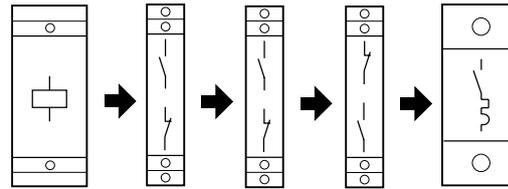

MZ203 to + MZ206    MZ201 + MZ201    MZ201 + MZ201    MZ202 + MZ201    MCB

### Auxiliary Contacts 5A - 230V~

Description	Width (8.75mm)	Cat Ref.
<p>1NO + 1NC Allows remote indication of main contact status</p>	½ Mod	<b>MZ201</b>



MZ202

### Auxiliary Contacts and Alarm Indication

Description	Width (8.75mm)	Cat Ref.
<p>Allows indication of whether and alarm indication MCB has been turned off or tripped</p>	½ Mod	<b>MZ202</b>

### Shunt Trip

Allows remote tripping of the associated device. Operation of the coil is indicated by a flag on the product fascia.



MZ204

Description	Width (17.5mm)	Cat Ref.
<p>230V - 415Vac 110V - 130Vdc</p>	1 Mod	<b>MZ203</b>
<p>24 - 48Vac 12 - 48Vdc</p>	1 Mod	<b>MZ204</b>

### Under Voltage Release

Allows MCB to be closed only when voltage is above 85% of  $U_n$ . MCB will automatically trip when voltage falls to between 70-35% of  $U_n$ . Operation of the coil is indicated by a flag on the product fascia.



MZ2046

Description	Width (17.5mm)	Cat Ref.
<p>230Vac</p>	1 Mod	<b>MZ206</b>
<p>48Vdc</p>	1 Mod	<b>MZ205</b>