

TA110DU thermal overload relays

66 ... 110 A



TA110DU-110

2CDC2311009F0011



KPR-101L

1SFC151402F0001

Description

The TA110DU thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- Two electrically isolated auxiliary contacts – 1 N.O. + 1 N.C.
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications

Ordering details


Setting range	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
A					
66 ... 90	200 A, Fuse type gG / 160 A aM	10A	TA110DU-90	1SAZ411201R1001	0.750
80 ... 110	224 A, Fuse type gG / 200 A aM	10A	TA110DU-110	1SAZ411201R1002	0.755

Ordering details accessories

For thermal overload relays	Description	Type	Order code	Weight (1 pce) kg
A				
TA110DU	Single mounting kit	DB200	1SAZ401110R0001	0.225
TA110DU	Reset push button*	KPR-101L	1SFA616162R1014	0.027

*Note: for more information see catalogue 1SFC151004C0201

Main dimensions mm, inches

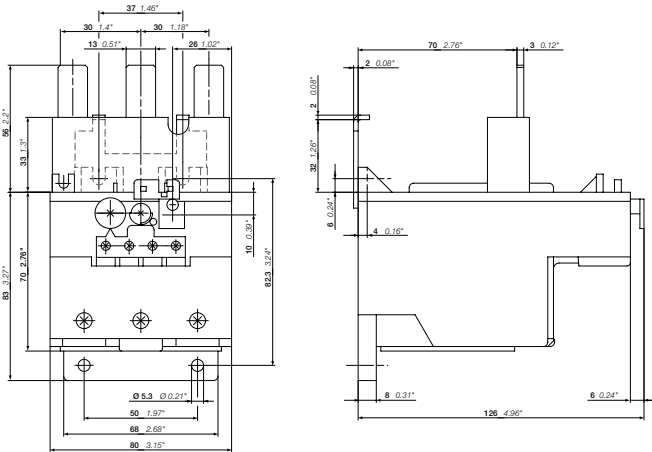

TA110DU

2CDC232020F0011

2CDC106037C0201

TA110DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA110DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_n	690 V AC
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA110DU
Rated operational voltage U_n	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_n / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 1.50 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 1.50 A
440 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_n / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

200C232005 F0211

200C106037 00201

TA110DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA110DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

4

Auxiliary circuit according to UL/CSA

Type	TA110DU
Contact rating	N.C., 95-96 C600
	N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device						
		480 / 600 V AC						
		Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker	Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Listed circuit breaker
TA110DU-90	90 A	10 kA	250 A, K5 / RK5	150 A	65 kA	200 A, Class J	65 / 25 kA	150 A
TA110DU-110	110 A	10 kA	250 A, K5 / RK5	250 A	65 kA	200 A, Class J	65 / 25 kA	150 A

TA110DU thermal overload relays

Technical data

General technical data

Type	TA110DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Acc. to IEC/EN60947-4-1	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit	
Degree of protection	Housing	IP20
	Main circuit terminals	IP10

Electrical connection

Main circuit

Type	TA110DU	
Connecting capacity		
 Rigid	1 x	16 ... 35 mm²
	2 x	-
 Flexible	1 x	16 ... 35 mm²
	2 x	-
	Stranded acc. to UL/CSA	1 x or 2 x AWG 6-2/0
	Flexible acc. to UL/CSA	1 x or 2 x AWG 6-2/0
Stripping length	25 mm	
Tightening torques	7.2 ... 9.6 Nm / 40 lb.in	
Connection screw	M8 (Hexagon)	

Auxiliary circuit

Type	TA110DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm²
	Stranded acc. to UL/CSA	1 x or 2 x AWG 18-14
	Flexible acc. to UL/CSA	1 x or 2 x AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozidriv 2)	