

SURFACE MOUNTING SOCKET OUTLETS

- With screwless Quick-Connect technology
- IEC 60309-1/2, EN 60309, VDE 0623
- Protection degree IP44


Surface Mounting Socket Outlet Quick-Connect

- Screwless terminals
- Kontex contact
- Cable entry 1x at top (open) and 1x at bottom (closed)
- Protection degree IP44

	3	4	5	110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty	g
	2P+E Ampere	3P+E Poles	3P+N+E Poles	3pol 4pol 5pol 4h 4h 4h	3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	3pol 4pol 5pol 7h 7h 7h	3pol 4pol 5pol 10h 10h 10h	3pol 4pol 5pol 2h 2h 2h		each
16	3			11912	11895					10	170
16	4				11910	11905	11914			10	200
16	5					112001				10	220
32	3			11918	11919					10	260
32	4				11921	11922	11924			10	275
32	5					112002				10	300



Fig.: Type 112001

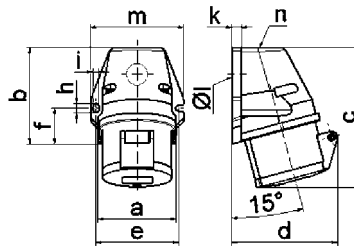

1 MB 19

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	59.5	72.4	72.4	79.1	79.1	79.1
b	90.0	90.0	90.0	92.0	92.0	92.0
c	130.0	130.0	131.0	142.0	142.0	142.0
d	85.0	96.0	98.0	103.0	103.0	106.0
e	62.0	77.0	77.0	84.0	84.0	84.0
f	33.5	33.5	33.5	30.0	30.0	30.0
h	9.0	9.0	9.0	9.0	9.0	9.0
i	5.5	5.5	5.5	5.5	5.5	5.5
k	8.0	9.0	9.0	9.0	9.0	9.0
l	21.0	21.0	21.0	21.0	21.0	21.0
m	72.0	87.0	87.0	94.0	94.0	94.0
n	M20	M25	M25	M25	M25	M25
Cond. mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Cond. mm² max	4	4	4	10	10	10


Surface Mounting Socket Outlet Quick-Connect

- Screwless terminals
- Kontex contact
- Cable entry 1x at top (open), 1x at bottom and 1x at rear (closed)
- Base rotatable by 180°
- Protection degree IP44

	3	4	5	110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty	g
	2P+E Ampere	3P+E Poles	3P+N+E Poles	3pol 4pol 5pol 4h 4h 4h	3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	3pol 4pol 5pol 7h 7h 7h	3pol 4pol 5pol 10h 10h 10h	3pol 4pol 5pol 2h 2h 2h		each
16	3			11928	11930	11931	11932	11933	11934	10	185
16	4					11907				10	240
16	5					11906				10	260



Fig.: Type 11906

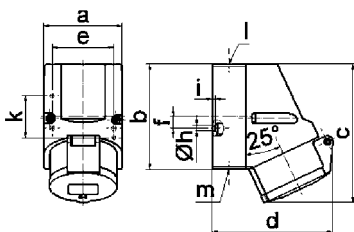

1 MB 7

Ampere Poles	16 3	16 4	16 5			
a	64.0	75.0	75.0			
b	87.0	100.0	100.0			
c	117.0	129.0	131.0			
d	103.0	108.0	116.0			
e	51.0	59.0	59.0			
f	-	11.0	11.0			
h	4.1	5.1	5.1			
i	4.5	4.5	4.5			
k	40.0	-	-			
l	M20	M20	M20			
m	for M20	for M20	for M20			
Cond. mm² min	1.5	1.5	1.5			
Cond. mm² max	4	4	4			

Surface Mounting Socket Outlet Quick-Connect


- Screwless terminals
- Kontex contact
- Cable entry 1x at top (open), 2x at bottom (closed)
- Base rotatable by 180°
- Suitable for feed-through wiring with special terminals
- Protection degree IP44

Twin terminal

	3	4	5	110V 50-60 Hz	230V 50-60 Hz	400V 50-60 Hz	500V 50-60 Hz	100-300Hz > 50V	301-500Hz > 50V	Qty	g
	2P+E Ampere	3P+E Poles	3P+N+E Poles	3pol 4pol 5pol 4h 4h 4h	3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	3pol 4pol 5pol 7h 7h 7h	3pol 4pol 5pol 10h 10h 10h	3pol 4pol 5pol 2h 2h 2h		each
16	4					11944	11945			10	305
16	5					11909	11947			10	325
32	3			11948	11949					10	350
32	4				11955	11956	11957	110073		10	365
32	5			11960	110322	11962	11963			10	405
16	5					110451				10	330



Fig.: Type 11909

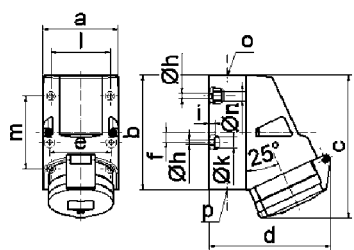

1 MB 2

Ampere Poles	16 4	16 5	32 3	32 4	32 5
a	83.0	83.0	83.0	83.0	83.0
b	126.0	126.0	126.0	126.0	126.0
c	153.0	155.0	155.0	155.0	155.0
d	127.0	130.0	130.0	130.0	136.0
e	68.0	68.0	68.0	68.0	68.0
f	11.0	11.0	11.0	11.0	11.0
h	5.5	5.5	5.5	5.5	5.5
i	6.5	6.5	6.5	6.5	6.5
k	12.0	12.0	12.0	12.0	12.0
l	65.0	65.0	65.0	65.0	65.0
m	80.0	80.0	80.0	80.0	80.0
n	10.0	10.0	10.0	10.0	10.0
o	M25	M25	M25	M25	M25
p	2x M25	2x M25	2x M25	2x M25	2x M25
Cond. mm² min	1.5	1.5	2.5	2.5	2.5
Cond. mm² max	4	4	10	10	10