

**SINGLE POLE INDIRECT CLAMPING TERMINAL BLOCKS
TYPE ZETApiù****Description:**

Single pole terminal blocks for conductor section 1 to 50 sqmm.

Self contained and robust, they are quick and easy to install for both industrial and domestic use.

The indirect clamping of the “ZETApiù” terminal blocks guarantees a low and stable contact resistance.

Indirect clamping eliminates damage to the conductor strands.

The easy-entry receptacles also grant a fast and reliable insertion of the cable.

Materials:

- Self-extinguishing Polycarbonate body
- Tempered Steel clamps
- Electrolytically tin plated copper interconnections

Certificazioni:

 - Directives 2006/95/CE

- EN 60998-1: 2004 and EN 60998-2-1: 2004 Norms (except for size Z50-10D)
- EN 60947-7-1: 2002 Norms (only for size Z50-10D)

Marks:

 **IMQ** Istituto Italiano del Marchio di Qualità type approval

 Lloyd's Register of Shipping type approval

 Registro Italiano Navale type approval

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 28/09/2015


SINGLE POLE INDIRECT CLAMPING TERMINAL BLOCKS TYPE ZETApiù



Type Z6:

3, 5, 6 and 10 way, single pole terminal blocks for conductor section 1 to 6 sqmm.

Self contained and robust, they are quick and easy to install for both industrial and domestic use.

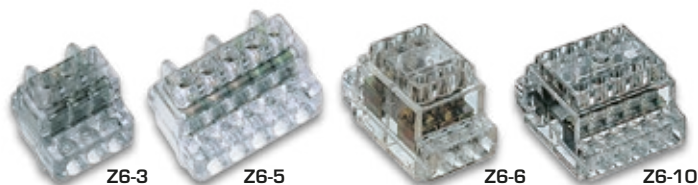


Ref.	No. of Ways	Connecting Capacity sqmm	Nominal Voltage V	Maximum Operating Temperature °C	Insulation Specification	Self Extinguishing Specification	Dimensions mm	Weight g	Quantity
Z6-3	3	(3 way) 1÷6	450	85	IP 20	V-0 (UL 94)	23x23xh27,5	15	30
Z6-3D							23x40xh36,5	18,5	10
Z6-5	5	(5 way) 1÷6	450	85	IP 20	V-0 (UL 94)	35x23xh27,5	23	20
Z6-5D							35x40xh36,5	26,5	10
Z6-6	6	(6 way) 1÷6	450	85	IP 20	V-0 (UL 94)	23x43xh28,5	26	15
Z6-6D							23x53xh33	31	10
Z6-10	10	(10 way) 1÷6	450	85	IP 20	V-0 (UL 94)	35x43xh28,5	41	10
Z6-10D							35x53xh33	46	15

D= Version with clamp for DIN rail

Type Z16:

3, 4, 5, 8 and 12 way, single pole terminal blocks.

Ideal for use as an equipotential bonding connector for both industrial and domestic use.

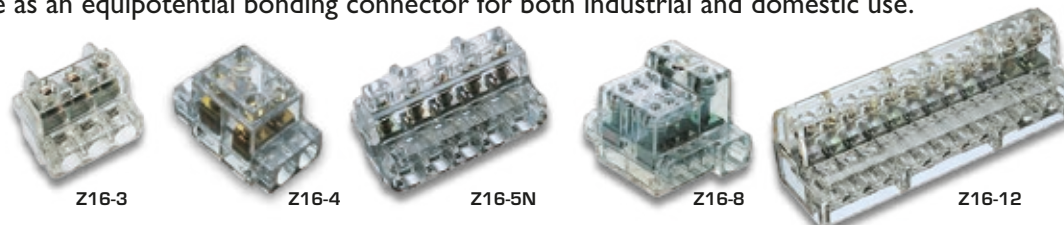

Ref.	No. of Ways	Connecting Capacity sqmm	Nominal Voltage V	Maximum Operating Temperature °C	Insulation Specification	Self Extinguishing Specification	Dimensions mm	Weight g	Quantity
Z16-3	3	16	450	85	IP 20	V-0 (UL 94)	38x31,3xh38	52	20
Z16-3D							38x50xh44	55,5	15
Z16-4	4	16	450	85	IP 20	V-0 (UL 94)	27x54xh37	50	15
Z16-4D							27x58xh43	54	10
Z16-5N	5	16	450	85	IP 20	V-0 (UL 94)	61x31,5xh38	64,5	10
Z16-5ND							61x50xh44	68	4
Z16-8	8 (2÷6)	(2 way) 16 + (6 way) 6	450	85	IP 20	V-0 (UL 94)	35,5x50xh36,5	50	15
Z16-8D							35,5x57xh42	56	10
Z16-12	12 (2÷10)	(2 way) 16 + (10 way) 6	450	85	IP 20	V-0 (UL 94)	104,5x32,5xh36,5	115	8
Z16-12D							104,5x50xh42	125	5

D= Version with clamp for DIN rail

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 28/09/2015

SINGLE POLE INDIRECT CLAMPING TERMINAL BLOCKS TYPE ZETApiù



Connecting capacity:

TERMINAL BLOCKS TYPE "ZETApiù"	TYPE		NOMINAL SECTION	No. OF WAYS X NOMINAL SECTION	CONNECTING CAPACITY OF EACH WAY* No. of Conductors x Section	MARKINGS			
	Z6-3	Z6-3D	6 [□]	3 x 6 [□]	1 x 6 [□] R/F				
	Z6-5	Z6-5D	6 [□]	5 x 6 [□]	1 x 4 [□] R/F				
	Z6-6	Z6-6D	6 [□]	6 x 6 [□]	1÷2 x 2,5 [□] R/F				
	Z6-10	Z6-10D	6 [□]	10 x 6 [□]	1÷2 x 1,5 [□] R/F				
					1÷4 x 1 [□] R/F				
	Z16-3	Z16-3D	16 [□]	3 x 16 [□]	1 x 16 [□] R/F				
					1 x 10 [□] R/F				
					1÷2 x 6 [□] R/F				
					1÷3 x 4 [□] R/F				
					1÷4 x 2,5 [□] R/F				
					1÷8 x 1,5 [□] R/F				
	Z16-4	Z16-4D	16 [□]	4 x 16 [□]	1 x 16 [□] F				
					1 x 10 [□] F				
					1÷2 x 6 [□] F				
					1÷3 x 4 [□] F				
					1÷4 x 2,5 [□] F				
					1÷8 x 1,5 [□] F				
	Z16-5N	Z16-5ND	16 [□]	5 x 16 [□]	1 x 16 [□] R/F				
					1 x 10 [□] R/F				
					1÷2 x 6 [□] R/F				
					1÷3 x 4 [□] R/F				
					1÷4 x 2,5 [□] R/F				
					1÷8 x 1,5 [□] R/F				
	Z16-8	Z16-8D	16 [□] /6 [□]	2 x 16 [□]	1 x 16 [□] R/F				
					1 x 10 [□] R/F				
					1÷2 x 6 [□] R/F				
					1÷3 x 4 [□] R/F				
					1÷4 x 2,5 [□] R/F				
					1÷8 x 1,5 [□] R/F				
				6 x 6 [□]	1 x 6 [□] R/F				
					1 x 4 [□] R/F				
					1÷2 x 2,5 [□] R/F				
					1÷2 x 1,5 [□] R/F				
					1÷4 x 1 [□] R/F				
	Z16-12	Z16-12D	16 [□] /6 [□]	2 x 16 [□]	1 x 16 [□] F				
					1 x 10 [□] F				
					1÷2 x 6 [□] F				
					1÷3 x 4 [□] F				
					1÷4 x 2,5 [□] F				
				10 x 6 [□]	1 x 6 [□] F				
					1 x 4 [□] F				
					1÷2 x 2,5 [□] F				
					1÷2 x 1,5 [□] F				
					1÷4 x 1 [□] F				

*A mixture of conductor sizes may be connected to the terminal block provided that the sum of their sections is less than the nominal section.

R = Rigid conductor F = Flexible conductor

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 28/09/2015