

16 	110	50 - 60	260	4	263	4	2610	4
	240	50 - 60	261	6	264	9	2611	9
	415	50 - 60	262	9	265	6	2612	6
32 	240	50 - 60	2662	4				
	415	50 - 60			2663	6	2600	6



Panel Mounting Appliance Inlet

 Splashproof

16 	110	50 - 60	2613	4	2616	4	2622	4
	240	50 - 60	2614	6	2617	9	2623	9
	415	50 - 60	2615	9	2618	6	2624	6
32 	240	50 - 60	2665	6				
	415	50 - 60		9	2666	6	2601	6



Panel Mounting Appliance Inlet

 Watertight

16 	110	50 - 60	2625	4	2628	4	2634	4
	240	50 - 60	2626	6	2629	9	2635	9
	415	50 - 60	2627	9	2630	6	2636	6
32 	240	50 - 60	2656	6				
	415	50 - 60		9	2657	6	2655	6



Panel Mounting Appliance Inlet

With hinged lid

 Splashproof

16 	110	50 - 60	2637	4	2640	4	2646	4
	240	50 - 60	2638	6	2641	9	2647	9
	415	50 - 60	2639	9	2642	6	2636	6
32 	240	50 - 60	2659	6				
	415	50 - 60			2660	6	2604	6



Panel Mounting Appliance Inlet

With fastening cap

 Watertight

16 	110	50 - 60	2826	4	2873	4		
	240	50 - 60	2817	6				
	415	50 - 60			2831	6	2814	6
32 	110	50 - 60	2811	4				
	240	50 - 60	2827	6				
	415	50 - 60			2830	6	2815	6




Panel Mounting Appliance Inlet

 Splashproof

A retaining nose on panel for the connector is recommended

16A and 32A with screw terminals

Dimensions

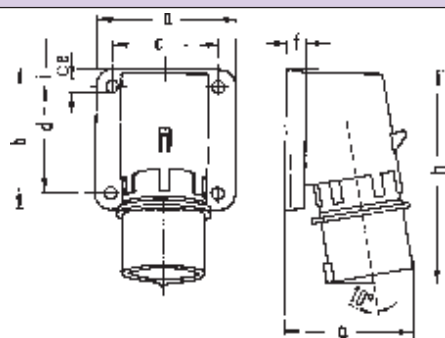


Amperes	16			32		
Poles	3	4	5	3	4	5
a	74	75	84	90	90	90
b	84	100	84	75	75	75
c	58	62	64	78	78	78
d	64	74	64	45	45	45
Ø e	5.5	4.3	5.5	5.5	5.5	5.5
f	12	12	7	7	7	7
g	70	77	78	86	86	88
h	128	145	129	138	138	140
i	-	-	-	13	13	13
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Appliance Inlet



Splashproof

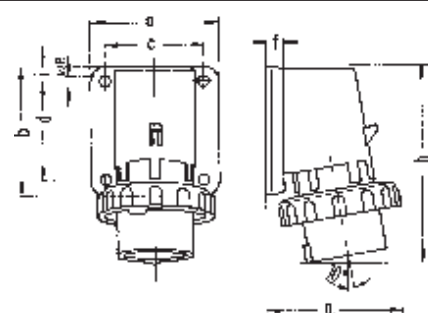


Amperes	16			32		
Poles	3	4	5	3	4	5
a	74	75	84	90	90	90
b	84	100	84	75	75	75
c	58	62	64	78	78	78
d	64	74	64	45	45	45
Ø e	5.5	4.3	5.5	5.5	5.5	5.5
f	12	12	7	7	7	7
g	80	88	90	100	100	101
h	128	145	129	138	138	139
i	-	-	-	13	13	13
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Appliance Inlet



Watertight

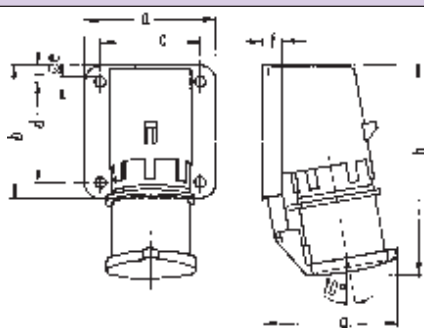


Amperes	16			32		
Poles	3	4	5	3	4	5
a	74	75	84	90	90	90
b	84	100	84	75	75	75
c	58	62	64	78	78	78
d	64	74	64	45	45	45
Ø e	5.5	4.3	5.5	5.5	5.5	5.5
f	12	12	29	29	29	29
g	78	88	105	114	114	115
h	134	151	138	149	149	150
i	-	-	-	13	13	13
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Appliance Inlet

With hinged lid



Splashproof

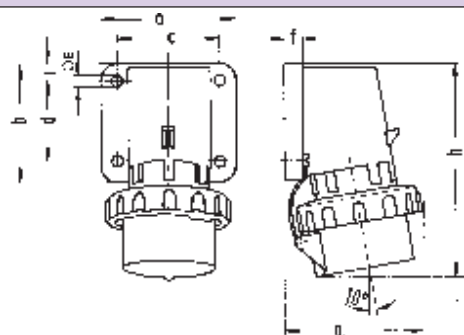


Amperes	16			32		
Poles	3	4	5	3	4	5
a	74	75	84	90	90	90
b	84	100	84	75	75	75
c	58	62	64	78	78	78
d	64	74	64	45	45	45
Ø e	5.5	4.3	5.5	5.5	5.5	5.5
f	12	12	7	7	7	7
g	80	88	90	100	100	101
h	133	152	134	147	147	148
i	-	-	-	13	13	13
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Appliance Inlet

With fastening cap



Watertight



Amperes	16			32		
Poles	3	4	5	3	4	5
a	75	75	75	75	75	75
b	75	75	75	75	75	75
c	60	60	60	60	60	60
d	60	60	60	60	60	60
Ø e	5.5	5.5	5.5	5.5	5.5	5.5
f	7	7	7	7	7	7
h	43	43	43	53	53	53
i	24	24	24	30	30	30
k	42	48	61	57	57	60
m	30	30	25	28	28	30
Conductor mm² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm² max	4	4	4	10	10	10

Panel Mounting Appliance Inlet



Splashproof

A retaining nose on panel for the connector is recommended