

# panel mounting socket outlet angled - flange 85x85, fixing centers 70x70

## Product description

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| Order number           | 12757                                                         |
| EAN/pcs                | 4024941127578                                                 |
| Product Group          | Panel mounting socket outlet Quick-Connect, angled            |
| Amperage               | 16A                                                           |
| Poles                  | 5p (3p+N+PE)                                                  |
| Earth 'Clock' Position | 6 h                                                           |
| Voltage                | 200/346 up to 240/415V                                        |
| Frequency              | 50 and 60Hz                                                   |
| Protection             | IP44                                                          |
| Color code             | red RAL 3000                                                  |
| Connection Design      | screwless spring terminals as cage clamp with Kontext-contact |
| Max. conductor         | 4,0 mm²                                                       |




## Further Information

Additional technical information The inclination is 20°

## Material

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| Material of Enclosure     | Polyamide                                                 |
| Contact / Contact Carrier | contact carrier made of polyamide, the contacts are brass |
| Weight/pcs                | 0.144 kg                                                  |
| Packaging unit            | 10 pcs                                                    |

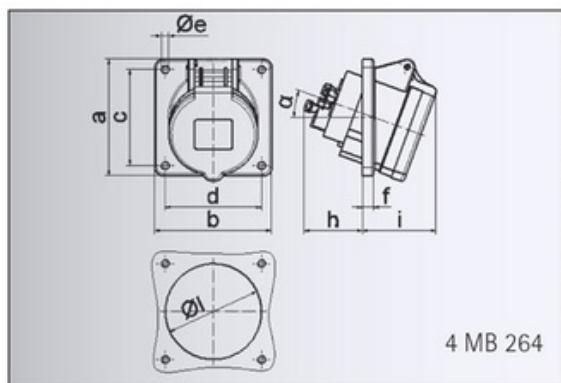

|                |      |      |      |      |      |      |
|----------------|------|------|------|------|------|------|
| Ampere         | 16   | 16   | 16   | 32   | 32   | 32   |
| Polzahl        | 3    | 4    | 5    | 3    | 4    | 5    |
| a              | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |
| b              | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |
| c              | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |
| d              | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |
| e Ø            | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  |
| f              | 8,0  | 8,0  | 8,0  | 8,0  | 8,0  | 8,0  |
| h              | 46,0 | 46,0 | 46,0 | 61,0 | 61,0 | 61,0 |
| i              | 50,0 | 51,0 | 54,0 | 60,0 | 60,0 | 60,0 |
| l Ø            | 57,0 | 65,0 | 70,0 | 78,0 | 78,0 | 78,0 |
| α              | 20°  | 20°  | 20°  | 20°  | 20°  | 20°  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5  | 2,5  | 2,5  |
| Leiter mm² max | 4    | 4    | 4    | 10   | 10   | 10   |