



MASTER TL-D 90 De Luxe

MASTER TL-D 90 De Luxe 18W/965 1SL/10

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information		Color rendering index (nom.)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	LLMF 2000 h Rated	96 %
Life to 10% failures (nom.)	12000 h	LLMF 4000 h Rated	95 %
Life to 50% failures (nom.)	15000 h	LLMF 6000 h Rated	94 %
Life to 50% failures preheat (nom.)	20000 h	LLMF 8000 h Rated	93 %
LSF 2000 h Rated	99 %	LLMF 12000 h Rated	92 %
LSF 4000 h Rated	99 %	LLMF 16000 h Rated	91 %
LSF 6000 h Rated	99 %	LLMF 20000 h Rated	90 %
LSF 8000 h Rated	99 %	Operating and Electrical	
LSF 12000 h Rated	89 %	Power (Rated) (Nom)	18.0 W
LSF 16000 h Rated	33 %	Lamp current (nom.)	0.360 A
LSF 20000 h Rated	2 %	Temperature	
Light Technical		Design temperature (nom.)	25 °C
Colour code	965 [CCT of 6500K]	Controls and Dimming	
Luminous flux (nom.)	1150 lm	Dimmable	yes
Luminous flux (rated) (nom.)	1150 lm	Approval and Application	
Colour designation	Cool Daylight	Energy efficiency label (EEL)	B
Chromaticity coordinate X (nom.)	309	Mercury (Hg) content (nom.)	2 mg
Chromaticity coordinate Y (nom.)	323		
Correlated colour temperature (nom.)	6500 K		
Luminous efficacy (rated) (nom.)	63.9 lm/W		

MASTER TL-D 90 De Luxe


Energy Consumption kWh/1000 h	22 kWh
Product Data	
Full product code	871150088846425
Order product name	MASTER TL-D 90 De Luxe 18W/965 SLV/10
EAN/UPC – product	8711500888464
Order code	88846425
Local Code	18965DLP

Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	928043596581
Net weight (piece)	71.000 g
ILCOS Code	FD-18/65/1A-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90 De Luxe 18W/965 SLV/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D De Luxe 18W/965

Photometric data

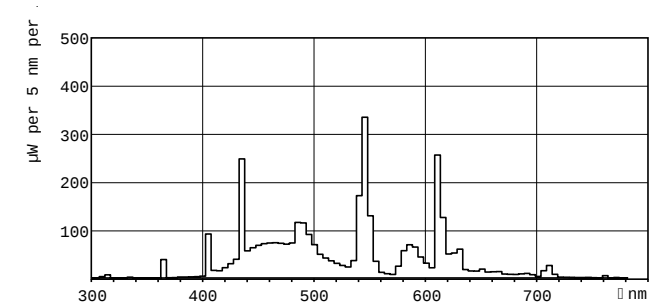

Lightcolour TL-D de Luxe /965

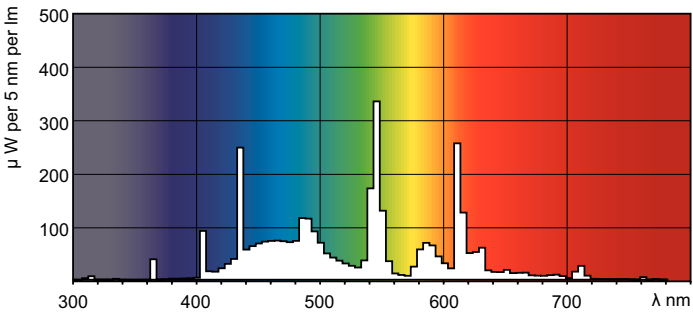

Lightcolour TL-D de Luxe /965

MASTER TL-D 90 De Luxe

