


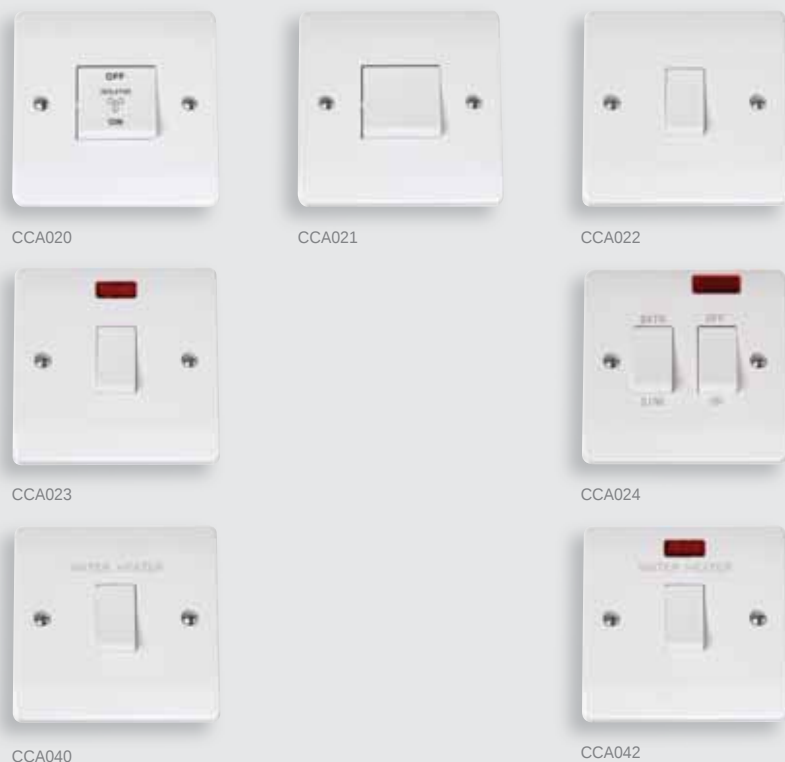

20A Control Switches With Optional Flex Outlet

- CCA040** 20A DP 'Water Heater' Switch
- CCA022** 20A DP Switch
- CCA023** 20A DP Switch With Neon
- CCA042** 20A DP 'Water Heater' Switch With Neon


20A DP Sink/Bath Switch

- CCA024** 20A DP Sink/Bath Switch With Neon

Fan Isolation Switch

- CCA020** 10A 3 Pole Fan Isolation Switch
- CCA021** 10A 3 Pole Isolation Switch

Standards: 022, 023, 024, 040, 042: BS EN 60669-1 020: IEC / EN 60669-2-4 Back Box Depth: 25mm Minimum
Cable Size: 20A DP: 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)

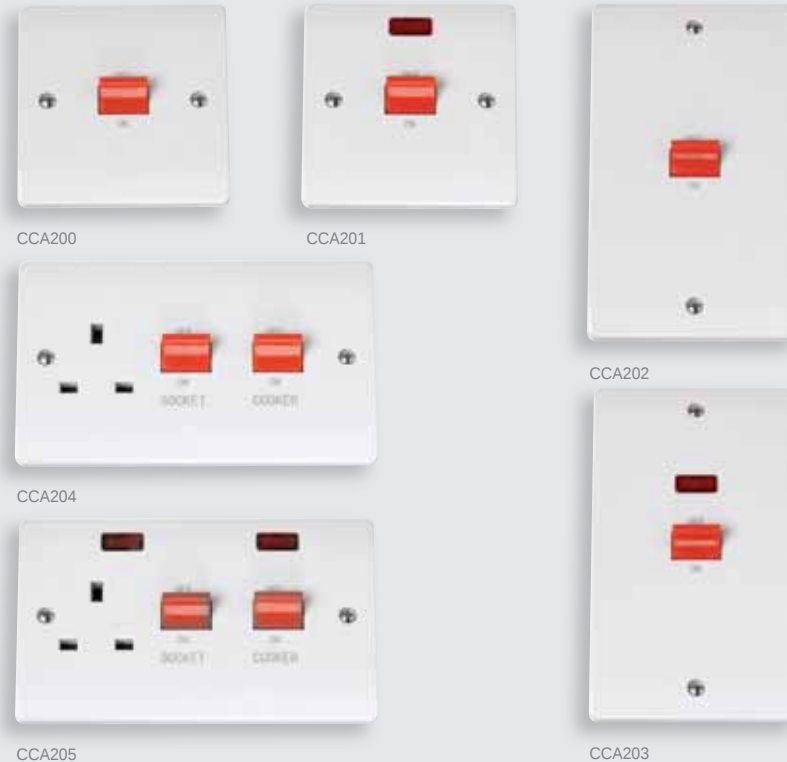

45A Switches And Socket Outlets

- CCA200** 45A 1 Gang DP Switch
- CCA201** 45A 1 Gang DP Switch With Neon
- CCA202** 45A 2 Gang DP Switch
- CCA203** 45A 2 Gang DP Switch With Neon
- CCA204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- CCA205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 200, 201, 202, 203: BS EN 60669-1 203, 204: BS 4177-1-2-3 and BS 1363-2
Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)