

NiCd Accus 4.0 Ah

Nickel-Cadmium cells (NiCd)



Product description

- _ High-temperature NiCd cells for use with emergency lighting unit
- _ 4 year design life
- _ 1 year guarantee from delivery date

Properties

- _ Constant high-temperature operation – depending on the emergency lighting unit used (refer to respective emergency control gear data sheet)
- _ Good charging properties at high temperature
- _ High energy maintenance of the charged battery
- _ Certified quality manufacturer
- _ In various configurations
- _ Simple connection with blade terminal
- _ With polycarbonate fixing caps and connecting cable
- _ Electrical connection with mounted end caps possible
- _ Suitable for emergency lighting equipment as per IEC 60598-2-22

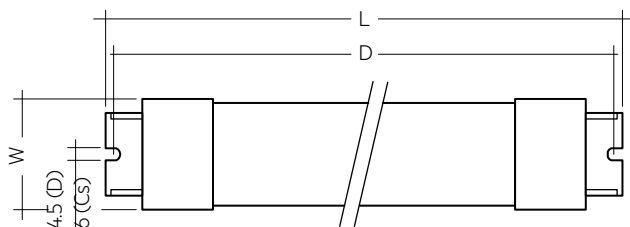
Website

<http://www.tridonic.com/89800084>



NiCd Accus 4.0 Ah

Nickel-Cadmium cells (NiCd)

**Ordering data**

Type	Article number	Figure	Number of cells	Capacity	Packaging, carton	Packaging, outer box	Weight per pc.
NiCd 4.0 Ah D cells – stick							
Accu-NiCd 3A 50	89800084	1	1 x 3	4.5 Ah	5 pc(s).	25 pc(s).	0.424 kg

Technical data

Battery voltage per cell	1.2 V
Min. battery casing temp. (design life of 4 years)	+ 5 °C
Max. battery casing temp. (design life of 4 years)	Refer to emergency control gear datasheet

Standards

according to EN 60598-2-22

Specific technical data

Type	Article number	Figure	Number of cells	Capacity	Length L	Hole spacing D	Width B	Height H
NiCd 4.0 Ah D cells – stick								
Accu-NiCd 3A 50	89800084	1	3	4.5 Ah	211.6 mm	191.6 mm	36.6 mm	35.6 mm