


Access floor service outlet boxes
slab floor boxes

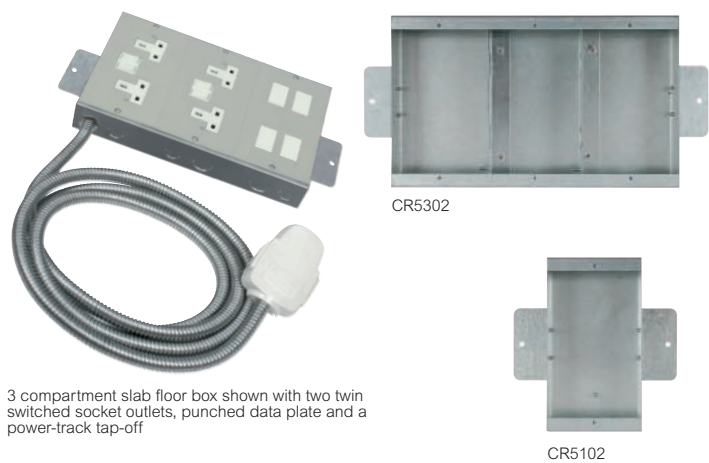

3 compartment slab floor box shown with two twin switched socket outlets, punched data plate and a power-track tap-off

Electrak slab floor boxes are an ideal solution for underfloor power and data requirements
Used in conjunction with Electrak floor grommets, slab boxes prevent unwanted access to power and data connections

Pack	Cat. Nos.	Slab floor boxes
		Fast and efficient installation with integrated fixing plates Wide range of power and data accessory plates Manufactured from 0.9 mm thick galvanised steel Each compartment has 2 entries for 20 mm and 2 entries for 25 mm flexible conduits
		100 mm compartment widths
		Use plates from the 3 compartment floor box section
1	CR5102	1 compartment slab floor box
1	CR5302	3 compartment slab floor box
		112 mm compartment widths
		Use plates from the 2 compartment floor box section
1	CR5202	2 compartment slab floor box
		75 mm compartment widths
		Use plates from the 4 compartment floor box section
1	CR5402	4 compartment slab floor box

Access floor grommets
quick fit floor grommets

NEW



Dimensions and technical information (p. 31)

Quick fit installation from floor tile fixing to cable deployment
Precision engineered from hard wearing durable flame retardant PC/ABS
Grey mouldings. Other colours available to special order
UL 94 VO flame class rating. Grommets conform to IEC-61534-22

Pack	Cat. Nos.	Floor grommet 144 mm Ø
		Can accommodate all cable types or three metal conduits up to a 20 mm diameter or 25 mm without foam Simply secured by pushing down the spring-loaded screws and rotating a quarter turn
1	EG0010	Empty grommet
1	EG0020	Cleaner's grommet with unswitched socket outlet
1	EG0031	144 mm grommet with punched plate for 4 x RJ45
		NEW
1	EG0050	Cleaners grommet with switched RCD protected socket
1	EG1111	Cleaner's grommet lid
1	EG1112	144 mm grommet lid
		Floor grommet 232 mm Ø
		Recommended for installation in light traffic areas
1	EG0055	232 mm grommet



For information on slab box configurations

Contact us on +44 (0) 845 600 6266



For information on grommet configurations and RCD protection

Contact us on +44 (0) 845 600 6266