


Plexo weatherproof boxes


increased depth PVC range (continued)

■ Dimensions (mm)

Cat. No. 0922 84

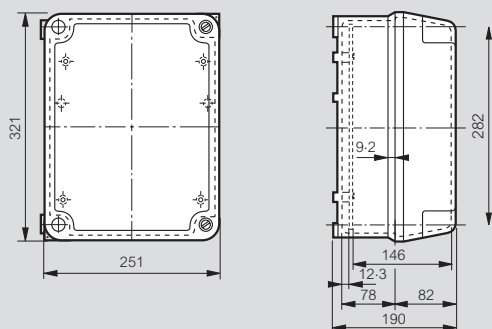


Fixing dimensions




■ Mounting plates for PVC boxes


Cat. No. 0350 90




Cat. No. 0350 92



Cat. No. 0350 93



Cat. No. 0350 94



Nylbloc™ terminal strips and line taps



Pack	Cat. Nos.	Nylbloc terminal strips			
		According to EN 60998-2-1, the rated insulation voltage of Nylbloc terminal strips is 250 V They may be used under 400 V nominal voltage supply when integrated in equipment designed according to EN 60664-1 with pollution degree 2 and overvoltage category III 12 way strips with captive screws Supplied with screws undone Flame retardant polypropylene (−25 °C to +100 °C) Ambient temperature from −25 °C to +55 °C			
		Rated capacity (mm²)	Diameter Ø	Current max. (A)	Dimensions (mm)
	Black				
10	0342 11	2·5	2·5	24	15·6 x 94 x 12·3
10	0342 13	6	3·5	41	18 x 107 x 14·7
10	0342 15	10	4·5	57	20·8 x 136 x 17·4
10	0342 17	16	5·5	76	24·2 x 157 x 22·6
10	0342 19	25	7	101	33·2 x 214 x 27·8
	White				
10	0342 21	2·5	2·5	24	15·6 x 94 x 12·3
10	0342 23	6	3·5	41	18 x 107 x 14·7
10	0342 25	10	4·5	57	20·8 x 136 x 17·4
10	0342 27	16	5·5	76	24·2 x 157 x 22·6

Line taps				
Strip of 10 separable line taps				
		Capacity per tap (mm²)	Width (mm)	
	With feet			
10	0340 00	2 x 6	15	
10	0340 01	2 x 10	19.5	
10	0340 02	2 x 16	21	
10	0340 03	2 x 25	21.5	
10	0340 04	2 x 35	25	
	Without feet			
10	0340 30	2 x 6	15	
10	0340 31	2 x 10	19.5	
10	0340 32	2 x 16	21	

Non-shear line taps					
Hexagonal head					
		Capacity per tap (mm²)	Width of slot (max. cable Ø in mm)	Overall height (mm)	Fixing centres (mm)
	Without feet				
20	0340 33	2 x 25	7.4	49	33
10	0340 34	2 x 50	9.5	59	44
	With feet				
20	0340 41	2 x 10			
20	0340 42	2 x 18	5.8	41	37
20	0340 43	2 x 30	7.4	49	37
10	0340 44	2 x 50	9.5	59	44
10	0340 45	2 x 75	11.7	71	62



Plexo weatherproof boxes p. 34-38

