

P 17 Tempra Pro IP 44 - LV 16 and 32 A

sockets and mobile sockets

Technical information

Terminal connection :

• Panel and surface mounting sockets

16 A : max. 1 x 4 mm² rigid

32 A : max. 1 x 10 mm² rigid

• Plugs and mobile sockets:

16 A : max. 1 x 2.5 mm² flexible

32 A : max. 1 x 6 mm² flexible

• Appliance inlets :

16 A : max. 1 x 2.5 mm² rigid

32 A : max. 1 x 6 mm² rigid

IP 44 according to BS EN 60529 and IEC 60529

IK 09 according to BS EN 62262 and IEC 62262

Material : polyamide 6


Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)

Temp. rating : -25 °C to +40 °C according to IEC 60309-1

Conform to BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2

Dimensions


Panel mounting sockets inclined outlet (p. 179)

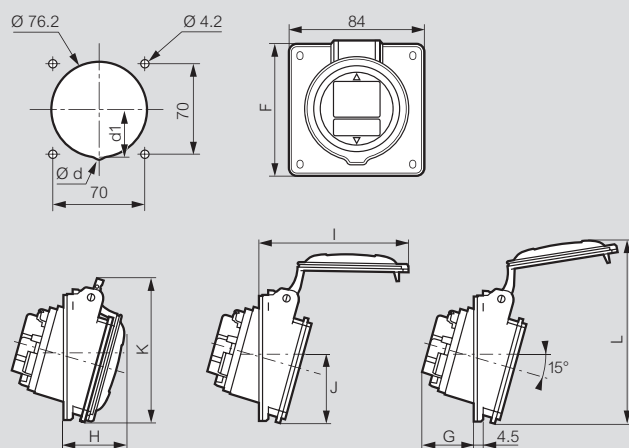

	Ød	d1	F	G	H	I	J	K	L
LV 16 A									
2P+±	-	-	84	33.5	37.5	85	42	88.5	112.5
3P+±	-	-	84	35.5	38.5	93	42	91.5	118.5
3P+N+±	-	-	84	36.5	39.5	100	43.3	97	123.5
LV 32 A									
2P+±	-	-	94	41.5	45.5	110	47	102	131
3P+±	-	-	94	41.5	45.5	110	47	102	131
3P+N+±	8	36	94	42.5	46.5	117	47	107.5	138


Panel mounting socket straight outlet small flange (p. 179)

Cat. No. 0573 54

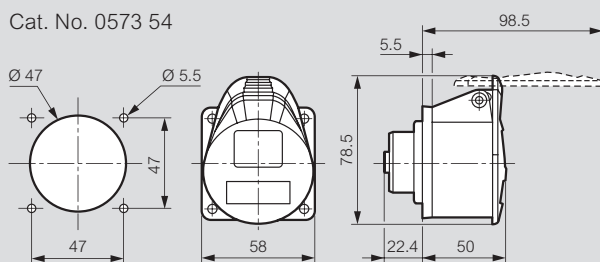


Weight (kg) = 0.105

Surface mounting sockets (p. 179)

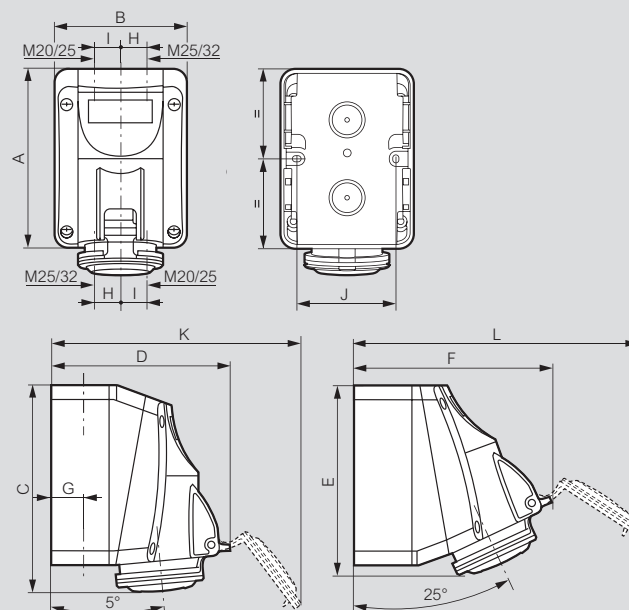

	A	B	C	D	E	F	G	H	I	J	K	L
LV 16 A												
2P+±	125	93	147	126	138	139	22	17	20	70	176	195
3P+±	125	93	147	134	138	147	22	17	20	70	190	210
3P+N+±	125	93	147	140	138	153	22	17	20	70	201	221
LV 32 A												
2P+±	150	113	174	156	163	172	28	22	26	90	220	245
3P+±	150	113	174	156	163	172	28	22	26	90	220	245
3P+N+±	150	113	174	162	163	177	28	22	26	90	230	256

Mobile sockets (p. 179)

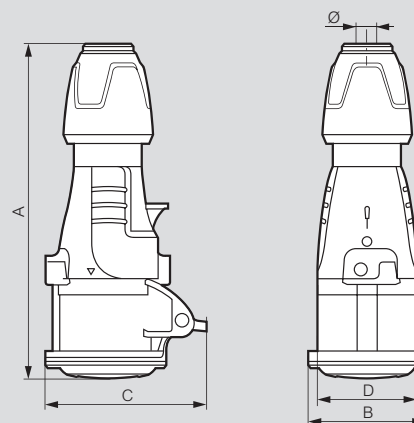


	A	B	C	D	Ø
LV 16 A					
2P+±	156 to 167	59	81	50	6.5 to 14
3P+±	157 to 168	65	88	55	7-10 to 15-5
3P+N+±	175 to 188	72	94	65	8 to 20
LV 32 A					
2P+±	184 to 197	73	99	65	8 to 20
3P+±	184 to 197	73-5	99	65	8 to 20
3P+N+±	190 to 203	79-5	105	71	11-9 to 22-2

P 17 Tempra Pro IP 44 - LV 16 and 32 A

plugs and appliance inlets

■ Dimensions


Straight plugs (p. 179)

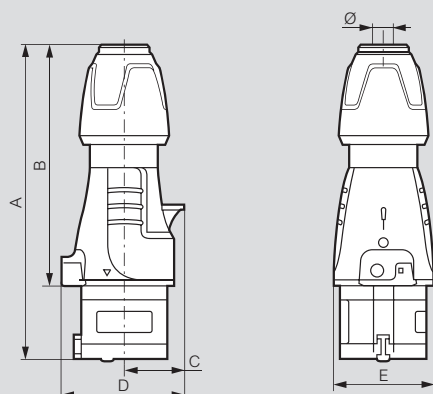

	A	B	C	D	E	Ø
LV 16 A						
2 P + ⊥	146 to 157	109.5 to 120.5	30	61	50	6.5 to 14
3 P + ⊥	146 to 157	109.5 to 120.5	34	67	55	7.10 to 15.5
3 P + N + ⊥	163 to 176	126.5 to 139.5	38	76	65	8 to 20
LV 32 A						
2 P + ⊥	172 to 185	127 to 140	40	78	65	8 to 20
3 P + ⊥	172 to 185	127 to 140	40	78	65	8 to 20
3 P + N + ⊥	179 to 189	133 to 143	45	86	71	11.9 to 22.2

Appliance inlets (p. 179)

Cat. Nos. 0575 84/88/89 and 0582 84/88/89

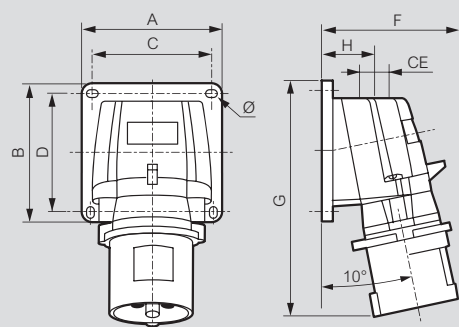

	Weight (kg)	A	B	C	D	F	G	H	CE	Ø
LV 16 A										
2 P + ⊥	0.168	84	84	72	72	77	126	34	M20	4.3
3 P + ⊥	0.232	84	84	72	72	84	134	34	M20	4.3
3 P + N + ⊥	0.256	84	84	72	72	91	141	34	M20	4.3
LV 32 A										
2 P + ⊥	0.325	110	110	98	98	96	168	39	M25	5.3
3 P + ⊥	0.364	110	110	98	98	102	168	39	M25	5.3

Adaptor from IEC to BS (p. 178)

Cat. No. 0521 01

16 A 2 P + ⊥ 230 V plug to 13 A 3 pin BS socket

