


DIMENSIONS

METAL ENCLOSURES

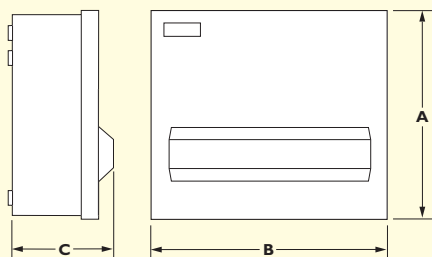

STARBREAKER SIZE 4 ENCLOSURE (504/0A)

DIMENSIONS A=185mm B=130mm C=104mm

502/26B 502/343B 502/363GU
502/2B 502/363B

STARBREAKER SIZE 6 ENCLOSURE (506/0A)

DIMENSIONS A=261mm B=188mm C=121mm

504/2B 504/383B
504/343B

STARBREAKER SIZE 9 ENCLOSURE (509/0A)

DIMENSIONS A=261mm B=242mm C=121mm

504/2263B 507/2B
505/232B 507/383B
507/343B

STARBREAKER SIZE 12 ENCLOSURE (512/0A)

DIMENSIONS A=261mm B=292mm C=121mm

507/2263B 507/2563B 510/2B
507/2283B 507/2583B 510/313B
507/2363B 508/232B 510/383B
507/2383B 508/242B
507/2463B 508/252B
507/2483B 508/262B

STARBREAKER SIZE 15 ENCLOSURE (515/0A)

DIMENSIONS A=261mm B=343mm C=121mm

508/22623B 510/2683B
508/226363B 510/2763B
508/2834634B 511/242B
509/242124B 511/252B
510/2363B 511/262B
510/2383B 511/272B
510/2463B 511/282B
510/2483B 513/2B
510/2563B 513/313B
510/2583B 513/383B
510/2663B 509/218484B

STARBREAKER SIZE 20 ENCLOSURE (520/0A)


DIMENSIONS A=261mm B=438mm C=121mm

513/226764B 513/256563B 515/2183B 516/212B 513/238565B
513/226863B 513/2637636B 515/2563B 516/262B 513/228665B
513/23624B 513/2638635B 515/2663B 516/272B
513/236565B 513/2639634B 515/2683B 516/282B
513/236664B 513/266463B 515/2763B 516/292B
513/236763B 513/2837636B 515/2783B 518/2B
513/23824B 513/2838635B 515/2863B 518/313B
513/246564B 513/2839634B 515/2883B 518/383B
513/246663B 514/272126B 515/2963B 512/2683B
513/25626B 514/282125B 515/2983B 513/226665B
513/256464B 515/2163B 516/2112B 513/238585B

CONSUMER UNIT PATTRAESSES

ENCLOSURE	PATTRAESSES	LEFT/RIGHT	TOP/BOTTOM
WIDTH	DEPTH	ENTRY	ENTRY
6 Module	16mm	MNSPE6670/1NR	MNSPE6584/1NR
9 Module	16mm	MNSPE6670/2NR	MNSPE6584/2NR
12 Module	16mm	MNSPE6670/3NR	MNSPE6584/3NR
15 Module	16mm	MNSPE6670/4NR	MNSPE6584/4NR
20 Module	16mm	MNSPE6670/5NR	MNSPE6584/5NR

For use with Crabtree All Metal consumer units. Allows surface cable entry through rear knockouts and automatically maintains enclosure IP rating to comply with BS7671 and BSEN61439-3 and the IET onsite guide.

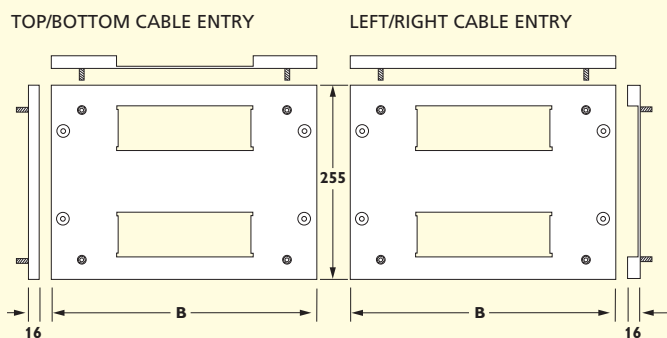


Cable entry slot line up with rear knockouts, the minimum number of knockouts only should be removed for cable entry.

Suitable for use with trunking systems.

DIMENSIONS

TWO BANK UNITS

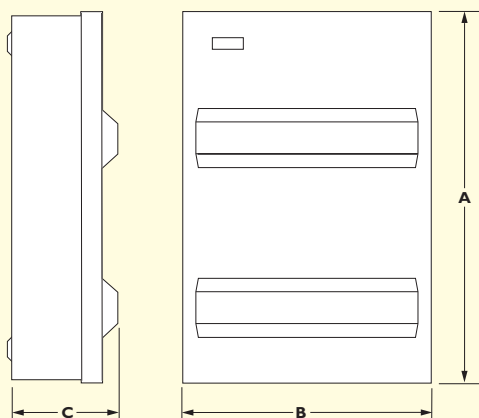

STARBREAKER SIZE 24 ENCLOSURE (524/2A)

DIMENSIONS A =506mm B =295mm C =121mm

517/26383B 520/283B

STARBREAKER SIZE 30 ENCLOSURE (530/2A)

DIMENSIONS A =506mm B =345mm C =121mm


523/26383B 526/283B

STARBREAKER SIZE 40 ENCLOSURE (540/2A)

DIMENSIONS A =506mm B =440mm C =121mm

533/26383B 536/283B

SPINE BACKPLATE ASSEMBLIES (White PVC Cover)

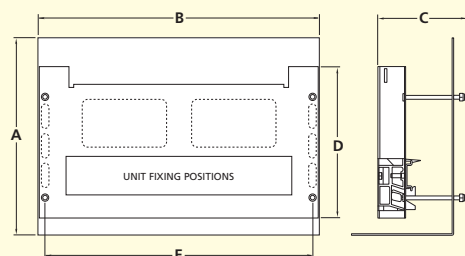

STARBREAKER 15 MODULE SPINE BACKPLATE UNIT (10W & 13W)

DIMENSIONS A =235mm B =335mm C =106mm D =180mm E =319.5mm

H910/2463WB H910/2563WB H913/2WB
H910/2483WB H910/2583WB
H910/2663WB

STARBREAKER 20 MODULE SPINE BACKPLATE UNIT (18W)

DIMENSIONS A =235mm B =448mm C =106mm D =180mm E =435mm

H918/2WB

STARBREAKER 15 MODULE DRCD (8W)

DIMENSIONS A =205mm B =333mm C =106mm D =140mm E =320mm

908/2834634B

STARBREAKER INCOMING DEVICES AND ENCLOSURES ENCLOSURES

MODULAR WIDTH	ALL METAL
4	504/0A
6	506/0A
9	509/0A
12	512/0A
15	515/0A
20	520/0A
24	524/0A
30	530/0A
40	540/0A

FLUSH MOUNTING KIT

MODULAR WIDTH	ALL METAL
6	506/FLA
9	509/FLA
12	512/FLA
15	515/FLA
20	520/FLA
24	524/FLA
30	530/FLA
40	540/FLA

REPLACEMENT COVERS FOR 5 SERIES ENCLOSURES

MODULAR WIDTH	ALL METAL
6	506/LID
9	509/LID
12	512/LID
15	515/LID
20	520/LID

DOUBLE POLE MAIN SWITCH DISCONNECTORS

RATING	MODULAR WIDTH	LIST No
40A	2	40/M12*
63A	2	63/M12*
100A	2	100/MI2*
100A	2	100/2MT**

* Used within main switch only and split-load applications

** Used within high integrity and dual RCD applications

RESIDUAL CURRENT CIRCUIT BREAKERS

RATING	MODULAR WIDTH	LIST No
40A 30mA	2	340/030
63A 30mA	2	363/030
80A 30mA	2	380/030
100A 30mA	2	310/030
63A 30mA	3	363/S030*
80A 30mA	3	380/S030*

* Dedicated as a split-load RCCB (3 modules)

AM 3 UPGRADE / REPLACEMENT COVERS FOR 8 SERIES ENCLOSURES

MODULAR WIDTH	LIST No
6	806/LID255G
9	809/LID255G
12	812/LID255G
15	815/LID255G
20	820/LID255G