



DATA SHEET


14 WAY METAL RCD INCOMER CONSUMER UNIT

Catalogue Reference :- NMRS1406L
NMRM1406L

Image not to scale



Current Rating	100A						
Operating Voltage	240Volts +10/-6%						
Short Circuit Rating	16kA when protected by a 100A HRC fuse to BS1361						
Insulation Voltage	500Volts AC						
IP Rating	IP2XC						
Consumer Unit	BSEN 61439-3						
Main Switch	BSEN 60947-3						
RCD Incomer	BSEN 61008						
Colour	RAL 9010						
Box Material	Steel						
Lid Material (including visor)	Steel						
Outgoing Terminal Size Neutral Bar	Maximum cable Size 16mm ²						
Outgoing Terminal Size Earth Bar	Maximum cable Size 16mm ²						
Incoming Terminal Size Neutral Bar	Maximum cable Size 16mm ²						
Incoming Terminal Size Earth Bar	Maximum cable Size 16mm ²						
Incoming Switch Disconnecter Size	Maximum cable size Main Switch 50mm ² , RCD 35mm ²						
Dimensions	<table border="1" style="display: inline-table; vertical-align: top;"> <tr> <th>Width</th><th>Fixings</th></tr> <tr> <td>D</td><td>E</td></tr> <tr> <td>438mm</td><td>356mm</td></tr> </table>	Width	Fixings	D	E	438mm	356mm
Width	Fixings						
D	E						
438mm	356mm						

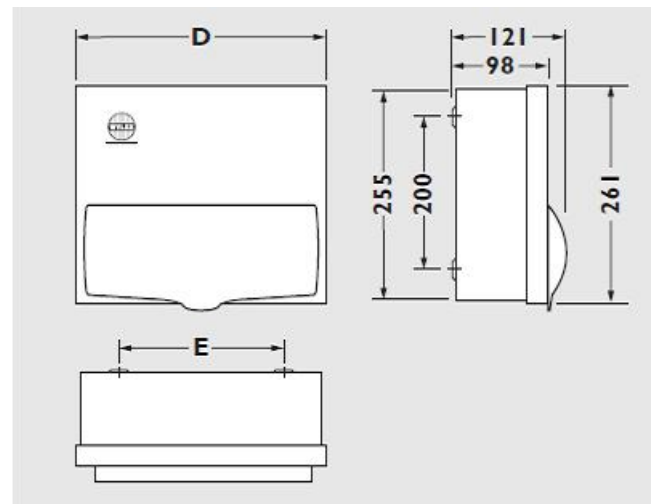

Compatible Circuit Protection Devices:

MCBs		MINIATURE RCBOs	
6kA B curve (3-5In)	6kA C curve (5-10In)	6kA B curve (3-5In)	6kA C curve (5-10In)
NHXLB06	NHXLC06	NHXS1B06	NHXS1C06
NHXLB10	NHXLC10	NHXS1B10	NHXS1C10
NHXLB16	NHXLC16	NHXS1B16	NHXS1C16
NHXLB20	NHXLC20	NHXS1B20	NHXS1C20
NHXLB25	-	NHXS1B25	-
NHXLB32	NHXLC32	NHXS1B32	NHXS1C32
NHXLB40	NHXLC40	NHXS1B40	NHXS1C40
NHXLB50	NHXLC50	tba	tba

Replacement Incoming devices

- **WRS100/2** (100A 30mA RCD)
- **WRM100/2** (100A 100mA RCD)

Spare Items

- **B4471/SPARE** (user operating instructions)
- **NMTLK2** (Visor locking kit)
- **WPL** (Padlock)