

# EMERGENCY LUMINARIES SPECIFICATION SHEET



**COLLINGWOOD  
LIGHTING**

01604 495 151  
collingwoodlighting.com

@collingwoodLED

/collingwoodlighting

collingwoodled

## Salvus Emergency Bulkhead

145lm, emergency bulkhead

### FEATURES

<b>IK rating</b>	IK07
<b>IP rating</b>	IP65
<b>Colour flexibility</b>	Fixed
<b>Input</b>	220-240V
<b>CRI</b>	>80Ra

### INSTALLATION INFORMATION

<b>Install Connector Type</b>	Screw Terminals
<b>Inrush Current</b>	20A
<b>Construction Material</b>	Lens PC Housing ABS
<b>Weight</b>	0.65Kg
<b>Maximum ambient temperature</b>	45°C
<b>Electric Class (1, 2, 3)</b>	2

### PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Feature III	Wattage	Colour	lm
EMBH145M	Maintained & Non-Maintained	View Dist 18m	Manual Test LiFeP04	3.0W	6500K	145 lm
EMBH145S	Maintained & Non-Maintained	View Dist 18m	Self Test LiFeP04	3.0W	6500K	145 lm

### ACCESSORIES

No accessories required

### GUARANTEE / WARRANTY

2 Year Extended Warranty

### FEATURES & BENEFITS

Terminals allow for both maintained and non-maintained usage, by simply connecting the cables to the push-fit terminals

Manual test or self test versions available

Lithium batteries are long-lasting and have a long-life

Has three M20 entry knock-outs (one on each side and one in the bottom), and rear BESA box fixing points, so can fit to most installation methods

Lens is rugged and made from robust Polycarbonate


Viewing distance of 18m

Complying with ISO 3864-1, and proud members of the ICEL

Ideal for open areas, escape routes, for general illumination or as an exit sign

Adhesive legend is supplied and divided in five parts

355mm

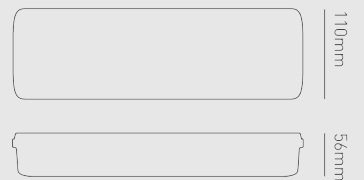

### Beam angle:

