



Salvus Emergency Twin Spot

400lm, self test emergency twin spot

FEATURES

IK rating	IK08
IP rating	IP65
Colour flexibility	Fixed
Input	220-240V
CRI	>80Ra

INSTALLATION INFORMATION

Install Connector Type	Push-fit Connector
Inrush Current	10.8A 84µs
Construction Material	Lens PC Housing PC
Weight	1Kg
Maximum ambient temperature	45°C
Electric Class (1, 2, 3)	2

PHOTOMETRICS @ 25°C

Product code	Feature I	Feature III	Wattage	Colour	lm
EMTW400S	Non-Maintained	Self Test LiFePO4	4.8W	6500K	400 lm

ACCESSORIES

No accessories required



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com


- @collingwoodLED
- /collingwoodlighting
- collingwoodled

GUARANTEE / WARRANTY

3 Year Extended Warranty

FEATURES & BENEFITS

- Non-maintained, so the light source is off when the mains power is on
- Lithium batteries are long-lasting and have a long-life
- Adjustable LED heads allow beam aiming
- A rugged robust polycarbonate lens and housing

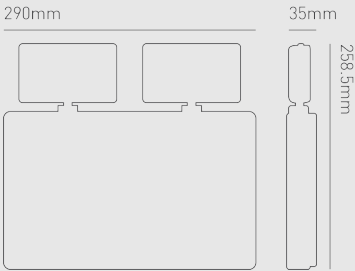

Beam angle:

