


NORDIK® INTERNATIONAL PLUS

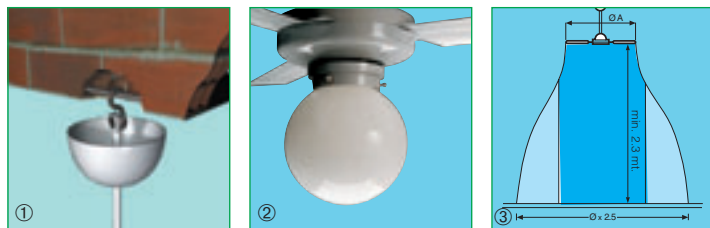

■ **Simple, modern design suitable for any type of room. The model 160/60" is especially suitable for heat recirculation in industrial and commercial applications.**

- Available in 4 blade sizes (90, 120, 140 and 160) in white.
- Induction motor with external rotor for greater power at slow speed.
- Also suitable for night time operation due to strong coated steel laminate blades with a shape designed to guarantee quiet performance.
- Complies with the CEI EN 60335-2-80 standard.
- Metal parts painted with scratchproof polyester powder.
- Supplied with 37.5 cm ceiling rods.

Accessories


(description and data on pages 188/190)

- Infrared remote-control unit (TeleNordik® 5T).
- 5-position speed controller (SCNR5, SCNRL5).
- Wide range of ceilings rods.
- Plus Light Kit (code 22415).

Wiring diagrams shown on page XXVII.

Design: F. Trabucco and M. Vecchi

Dimensions (mm)

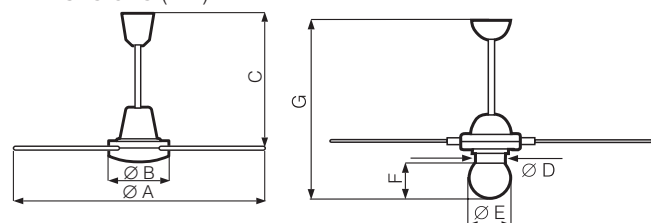

Nordik International Plus	Ø A	Ø B	C	Ø D	Ø E	F	G
90/36"	914	230	495	130	200	180	776
120/48"	1218	230	495	130	200	180	776
140/56"	1422	230	495	130	200	180	776
160/60"	1524	230	495	130	200	180	776

Product	Colour	Code	V ~ 50 Hz	W motor	A	Rpm	m³/h	Approvals	kg	Insulation
Nordik International Plus 90/36"	White	61701	220-240	70	0.32	228	8.550		5.5	
Nordik International Plus 120/48"		61711	220-240	70	0.33	234	9.900		5.9	
Nordik International Plus 140/56"	White	61721	220-240	70	0.33	231	13.500		6.2	
Nordik International Plus 160/60"	White	61731	220-240	70	0.33	201	14.000		6.7	

Flow rates measured according to CEI 107/35.76 standards.

Conforms with ISO 3744 for noise and pressure levels.