
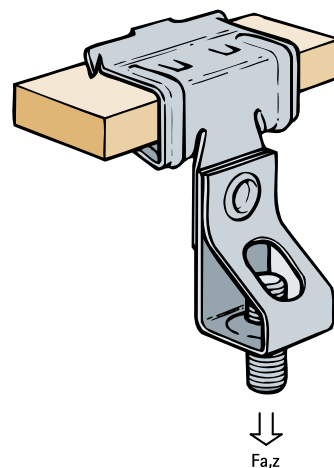


Britclips® Beam Clip / Threaded Rod Hanger

for flange 2 - 30 mm

(J 05 165)

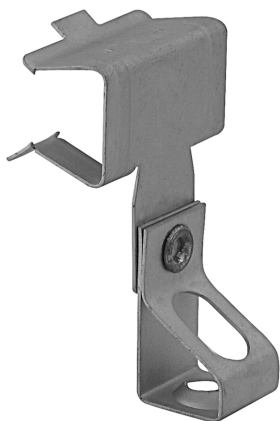


Features and benefits

- for a solid fixing to steel construction without the need for welding or drilling
- with threaded rod holder (rod height adjustable by screwing)
- material: spring steel (type CS70)
- surface treatment: Delta-Tone 9000 (480 hours)

Part No.	Code	A (mm)	R	H (mm)	Fa,z (N)	Pack 1
EM 5042 0 604	RH6MT-12	2 - 4	M6	44	680	100
EM 5042 0 804	RH8MT-12	2 - 4	M8	44	680	100
EM 5042 1 004	RH10MT-12	2 - 4	M10	44	680	100
EM 5042 0 609	RH6MT-25	5 - 9	M6	51	680	100
EM 5042 0 809	RH8MT-25	5 - 9	M8	51	680	100
EM 5042 1 009	RH10MT-25	5 - 9	M10	51	680	100
EM 5042 0 616	RH6MT-50	10 - 16	M6	56	680	100
EM 5042 0 816	RH8MT-50	10 - 16	M8	56	680	100
EM 5042 1 016	RH10MT-50	10 - 16	M10	56	680	100
EM 5042 1 116	RH12P-50	10 - 16	Ø 11.0 mm	56	680	100
EM 5042 0 620	RH6MT-75	17 - 20	M6	63	680	100
EM 5042 0 820	RH8MT-75	17 - 20	M8	63	680	100
EM 5042 1 020	RH10MT-75	17 - 20	M10	63	680	100
EM 5042 0 630	RH6MT-100	23 - 30	M6	82	680	100
EM 5042 0 830	RH8MT-100	23 - 30	M8	82	680	100
EM 5042 1 030	RH10MT-100	23 - 30	M10	82	680	100

For use with static loads only.

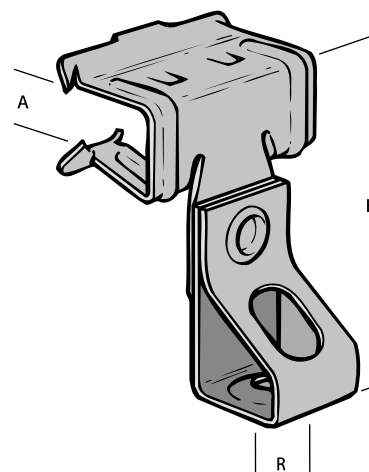

Complementary

BIS Stud Bolt
BIS Threaded Rod

Alternative

Britclips® Tiger