


Copper Busbars

Threaded Busbar




- Electrolytic copper
- Rounded corners
- Thickness: from 2 to 10 mm
- Length: from 1000 to 2000 mm

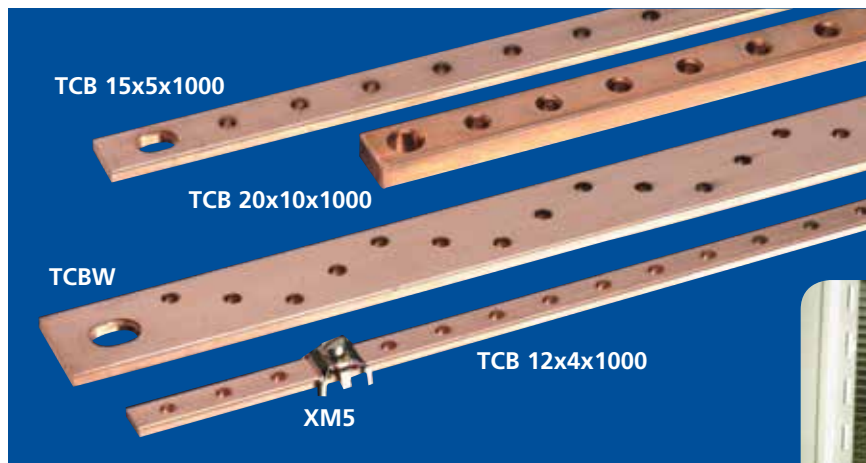

TCB

..x 5 x 1000 mm

- Threaded Busbars
- Thickness 5 mm
- Threaded M5, M6
- Length 1000 mm



Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	ØM	kg
549220	TCB 12 x 5	12	5	18	-	M5	0,50
550210	TCB 15 x 5	15	5	25	8 x 12	M6	0,65
550220	TCB 20 x 5	20	5	25	10 x 14	M6	0,85
550230	TCB 32 x 5	32	5	25	12 x 16	M6	1,35

TCB

..x 5 x 2000 mm


- Threaded Busbars
- Thickness 5 mm
- Threaded M6
- Length 2000 mm

Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	ØM	kg
549000	TCBS 15 x 5	15	5	17,5	8 x 12	M6	1,19
549010	TCB 20 x 5	20	5	25	10 x 14	M6	1,67
549020	TCB 30 x 5	30	5	25	12 x 16	M6	2,50

TCB

..x 2/4 x 1000 mm

- Threaded Busbars
- Thickness 2, 4 mm
- Threaded M5, M6, M8
- Length 1000 mm



Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	kg
549230	TCB 12 x 2 x 1000	12	2	18	M5	0,300
550200	TCB 12 x 4 x 1000	12	4	18	M5	0,430
549200	TCB 18 x 4 x 1000	18	4	20	M8	0,600
549210	TCB 25 x 4 x 1000	25	4	20	M6	0,800

TCB

12 x 4 x 2000 mm

- Threaded Busbars 12 x 4
- Thickness 4 mm
- Threaded M5
- Length 2000 mm

Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	kg
550190	TCB 12 x 4 x 2000	12	4	18	M5	0,850


Connector XM5

FOR 12 x 4 Threaded Busbars

Part No.	DESCRIPTION	kg
550250	Connector XM5	0,010

TCBW

- Threaded Busbars 32 x 5W
- Connections: 40% more
- Thickness 5 mm
- Threaded M6
- Length 2000 mm




Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	ØM	kg
549030	TCBW 32 x 5 x 2000	32	5	17,5	12 x 16	M6	2,65

TCB

..x 10 x 1000/2000 mm

- Threaded Busbars
- Thickness 10 mm
- Threaded M8
- Length 1000 and 2000 mm



Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	ØM	kg
550290	TCB 20 x 10 x 1000	20	10	25	10	M8	1,67
550180	TCB 30 x 10 x 1000	30	10	25	10	M8	2,50

Part No.	DESCRIPTION	A mm	E mm	P mm	ØD mm	ØM	kg
550160	TCB 30 x 10 x 2000	30	10	25	10	M8	5,4

OTHER THREADED BARS ON REQUEST