



1 AS6000

6 TONNE AXLE STANDS (PAIR)

Expert Quality, heavy duty manufactured from carbon steel hardened and tempered with hardened steel pin. Display carton. Specification:

| | |
|---------------------------|----------------------|
| Minimum height | ... 535mm |
| Maximum height | ... 870mm |
| Capacity (max. per stand) | ... 6000kg (S.W.L.) |
| Capacity (per pair) | ... 12000kg (S.W.L.) |

Stock No.

54722

2 AS6000R

6 TONNE RATCHETING AXLE STANDS (PAIR)

Ratchet-type action. Large saddle (29 x 107mm). Display carton. Specification:

| | |
|---------------------------|----------------------|
| Minimum height | ... 400mm |
| Maximum height | ... 630mm |
| Capacity (max. per stand) | ... 6000kg (S.W.L.) |
| Capacity (per pair) | ... 12000kg (S.W.L.) |

Stock No.

30883

3 AS2000RA

2 TONNE RATCHETING AXLE STANDS (PAIR)

Ratchet-type action. Large saddle (36 x 85mm). Display carton. Specification:

| | |
|---------------------------|---------------------|
| Minimum height | ... 277mm |
| Maximum height | ... 435mm |
| Capacity (max. per stand) | ... 2000kg (S.W.L.) |
| Capacity (per pair) | ... 4000kg (S.W.L.) |

Stock No.

30878



4 AS2000

2 TONNE AXLE STANDS (PAIR)

Expert Quality, heavy duty manufactured from carbon steel hardened and tempered with hardened steel pin. Display carton. Specification:

| | |
|---------------------------|---------------------|
| Minimum height | ... 310mm |
| Maximum height | ... 520mm |
| Capacity (max. per stand) | ... 2000kg (S.W.L.) |
| Capacity (per pair) | ... 4000kg (S.W.L.) |

Stock No.

54721

5 AS3000R

3 TONNE RATCHETING AXLE STANDS (PAIR)

Ratchet-type action. Large saddle (34 x 90mm). Display carton. Specification:

| | |
|---------------------------|---------------------|
| Minimum height | ... 288mm |
| Maximum height | ... 435mm |
| Capacity (max. per stand) | ... 3000kg (S.W.L.) |
| Capacity (per pair) | ... 6000kg (S.W.L.) |

Stock No.

30881

6 WD2

WHEEL DOLLIES (PAIR)

Expert Quality, each fitted with four heavy duty white non-marking castors. Robust steel manufacture enables up to 454kg weight to be carried on each dolly. Designed to locate underneath vehicle wheels allowing precise and easy movement within confined spaces.

| Stock No. | Dimensions L x W x H |
|-----------|-------------------------|
| 23253 | 600 x 360 x 100mm |


7

HGV WHEEL CHOCK

Conforms to DIN 76051-D53Z and complies with ADR regulations

Expert Quality, for stabilizing HGVs whilst parked. Manufactured from anti-slip, non-sparking, highly visible weatherproof heavy duty HDPE plastic. Sold loose as single chock.

| Stock No. | Part No. | Chock Size | For HGV Wheel Dia. |
|-----------|----------|------------|--------------------|
| 12271 | WC250 | 250mm | over 920mm |

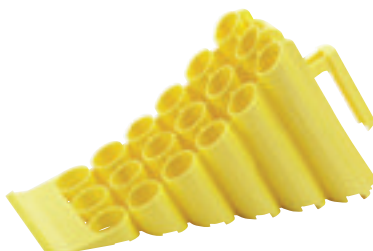

8 RWC

RUBBER WHEEL CHOCKS

Pair of chocks to prevent vehicles moving whilst working with trolley jacks, scissor jacks, bottle jacks, axle stands or on a slope. Display carton.

Stock No.

54500

