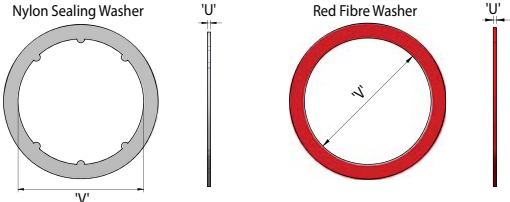


Nylon Sealing and Red Fibre Washer

|  | | |
|---|----------------------|-----|
| SELECTION TABLE | | |
| Metric Gland Size 'V' | NPT * Gland Size 'V' | 'U' |
| M20 | 1/2" | 1.5 |
| M20 | 3/4" | 1.5 |
| M25 | 1" | 1.5 |
| M32 | 1 1/4" | 1.5 |
| M40 | 1 1/2" | 1.5 |
| M50 | 2" | 1.5 |
| M63 | 2 1/2" | 1.5 |
| M75 | 3" | 1.5 |
| M80 ¹ | 3 1/2" | 1.5 |
| M90 ¹ | 3 1/2" | 1.5 |
| M100 ¹ | 4" | 1.5 |
| All dimensions in millimetres (except * where dimensions are in inches). | | |

¹ M80, M90 and M100 washers are only available in Red Fibre

Application

- For use on cable gland entry threads.

Features


- To maintain ingress protection rating at the enclosure.
- Retaining 'Pips' make washer captive on metric cable gland entry thread.

Ordering Information

Format for ordering is as follows:

| Sealing Washer Type | Size / Thread | Sealing Washer Type | Size / Thread |
|---------------------|---------------|---------------------|---------------|
| Nylon Washer | M25 | Fibre Washer | M25 |

Serrated Washer

|  | | |
|---|----------------------|-----|
| SELECTION TABLE | | |
| Metric Gland Size 'V' | NPT * Gland Size 'V' | 'U' |
| M20 | 1/2" | 1.5 |
| M20 | 3/4" | 1.5 |
| M25 | 1" | 1.5 |
| M32 | 1 1/4" | 1.5 |
| M40 | 1 1/2" | 1.5 |
| M50 | 2" | 1.5 |
| M63 | 2 1/2" | 1.5 |
| M75 | 3" | 1.5 |
| All dimensions in millimetres (except * where dimensions are in inches). | | |

Application

- For use on cable gland entry threads.

Features

- To dampen vibrations of the cable gland / equipment assembly which may loosen the cable gland or locknut.
- Manufactured in Stainless Steel (standard).

Ordering Information

Format for ordering is as follows:

| Serrated Washer Type | Size / Thread | Serrated Washer Type | Size / Thread |
|----------------------|---------------|----------------------|---------------|
| Serrated Washer | M25 | Serrated Washer | 1"NPT |