



1 4276

AIR NIBBLER

Quality diecast construction. Punch head has four way entry for forward, right, left and reverse operation. Carton packed.

Specification:

Cutting capacity	... 18 gauge in steel
Strokes per minute	... 2100
Operating air pressure	... 90psi (6.2bar)
Average air consumption	... 4.0cfm (114L/min)
Minimum hose size	... 3/8" I.D
Air inlet	... 1/4" BSP
Weight	... 1kg

This machine has a minimum cutting radius of 6mm.

Stock No.	Description
27639	Nibbler
27831	Punch
27834	Die



2 4202AK

AIR HAMMER KIT

General purpose short stroke hammer kit comprising a full range of accessories including panel cutter, rivet cutter, bush splitter, spot weld splitter and piercing cutter. Other individual cutters are available separately. Supplied complete in carrying case. Display carton.

Contents: • air hammer • 5 chisels • chisel retaining spring • oil pot • 1/4" BSP nipple

Specification - air hammer:

Chisel shank opening	... 10.18mm	Average air consumption	... 4.0cfm (114L/min)
Blows per minute	... 3000	Minimum hose size	... 3/8" I.D
Stroke length	... 66.6mm	Air inlet	... 1/4" BSP
Operating air pressure	... 90psi (6.2bar)	Weight (hammer only)	... 2 kg

Stock No.
57676



3 A4202AK

CHISEL RETAINING SPRING

For use with air hammers. Display packed.


Stock No.
22315



CHISELS AND FLANGE ATTACHMENT

For use with Stock Nos.57676 as well as other manufacturers similar air hammers. Shank 10.18mm. All chisels must be used with a chisel retaining spring, Stock No.22315. Display packed.

Stock No.	Description
57800	Tailpipe Cutter Chisel
57801	Spot Weld Breaker Chisel
57802	Taper Punch
57803	Ripping Chisel
57804	Panel Cutting Chisel
59083	Metal Flanging Attachment

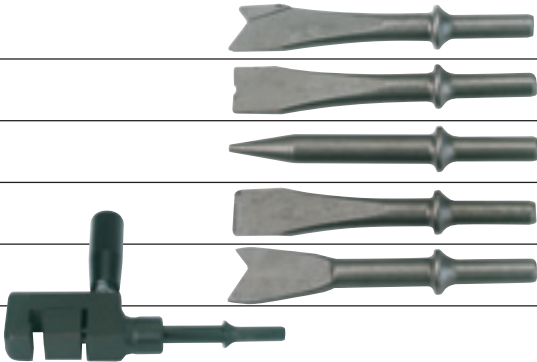

PRODUCT LOCATOR

AIR TOOL HOSES AND FITTINGS - A complete range of air tool hoses and fittings is shown on pages 655-662.