

Floor Standing Enclosures

Steel Range

Accessories | Thermal


Spacer kits, CVK

Description:	Provides ventilation by raising the enclosure's roof panel 15 mm (CVK15), 50 mm (CVK50).
Material:	Zinc plated steel.
Pack quantity:	4 pieces with mounting accessories.
Description	Item no.
Raises the roof 15 mm	CVK15
Raises the roof 50 mm	CVK50



Ventilated bottom plates, CVB

Description:	Can be used in combination with a ventilated plinth PV. 33% ventilated.	
Material:	1.5 mm perforated zinc plated steel.	
Pack quantity:	3 pieces (4 pieces for D>600mm) with mounting material.	
Mounting requirements:	Use in combination with ventilated plinths PV.	
For enclosure		
W	D	Item no.
600	400	CVB0604
600	500	CVB0605
600	600	CVB0606
600	800	CVB0608
800	400	CVB0804
800	500	CVB0805
800	600	CVB0806
800	800	CVB0808
1000	400	CVB1004
1000	500	CVB1005
1000	600	CVB1006
1000	800	CVB1008
1200	600	CVB1206
1200	800	CVB1208

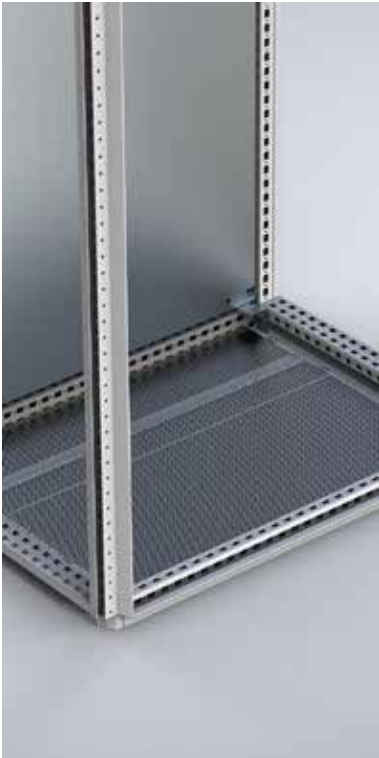


Floor Standing Enclosures

Steel Range

Accessories | Cabling

Section profiles for cable entry, SCE

Description:	For sealing the cable entry between gland plates. Forms a tight seal around cables and fills gaps to prevent dust from entering. The foam is pre-fitted in the section profile that can be easily mounted in the bottom plates thanks to its click-in fixing solution. An alternative to the bottom late gasket kit BG01.
Material:	Extruded PVC section profile. Gasket: adhesive foam with cross-section of 30 x 25 mm.
Pack quantity:	1 set consisting of 2 click-in section profiles with foam rubber.
For enclosure	
W	Item no.
600	SCE600
800	SCE800
1000	SCE1000
1200	SCE1200

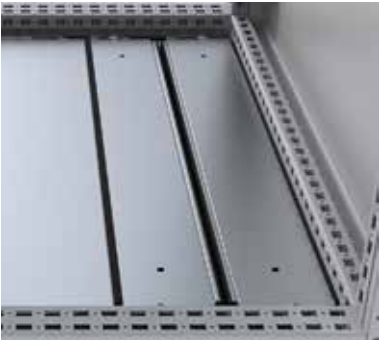

Cable entry foam and bottom plate gaskets, BG

Description:	The bottom of the enclosure is sealed by the use of an adhesive gasket applied on to the frame around the openings at the bottom of the enclosure. The cables are sealed by the addition of adhesive foam placed between the bottom plates. The elasticity and the size of this foam ensures a tight seal around most cables.
Pack quantity:	1.6 m adhesive foam (30 x 25 mm) and 6 m adhesive gasket (4.5 x 8 mm). For 1600 mm wide enclosures please order 2 sets.
Item no.	
BG01	



Inside cable fixing bars, CAB

Description:	Mounted above the bottom plates. Holds standard cable clamps CAC to secure incoming cables. Fully adjustable in depth. When EMC shielded earthing cables are connected to the support bar the Faraday effect will be kept intact for maximum EMI shielding.
Material:	2 mm zinc plated steel.
Pack quantity:	2 bars with mounting accessories.
Mounting requirements:	Add CAC clamps depending on diameter of the cable(s).
For enclosure	
W	Item no.
400	CAB400
600	CAB600
800	CAB800
1000	CAB1000
1200	CAB1200

