

ACCESSORIES ON REQUEST


MODELS	DESCRIPTION	CODE	PRODUCT	
	C 1.5 Electronic speed controller 1.5 A	12966	11150 - 11201 - 11202 - 11222 - 11301 - 11302 - 11321 - 11322 - 11401- 11402 - 11421 - 11422	
	SCNRB Electronic speed controller built-in	12971	11150 - 11201 - 11202 - 11221 - 11222 - 11301 - 11302 - 11321 - 11322 - 11401 - 11402 - 11421 - 11422	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966	
	F KIT Kit to window-mount	100/4"	22131	11201 - 11202 - 11203 - 11211 - 11212 - 11681 - 11682 - 11221 - 11222 - 11223 - 11231 - 11232 - 11683 - 11684 - 11616 - 11614 - 11646
		120/5"	22132	11301 - 11302 - 11311 - 11312 - 11781 - 11782 - 11783 - 11321 - 11322 - 11331 - 11332 - 11741 - 11746- 11784 - 11692
		150/6"	22133	11401 - 11402 - 11411 -11412 - 11881 - 11882 - 11421 - 11422 - 11431 - 11432 - 11851 - 11856 - 11883 - 11884 - 11698
	GFI (Grey Fixed Grille)	100/4"	22010	11150 - 11153 - 11201 - 11202 - 11203 - 11211 - 11212 - 11681 - 11682 - 11221 - 11222 - 11223 - 11231 - 11232 - 11683 - 11684 - 11616
		120/150	22020	11301 - 11302 - 11311 - 11312 - 11781 - 11782 - 11783 11321 - 11322 - 11331 - 11332 - 11784 - 11692 - 11401 11402 - 11411 - 11412 - 11881 - 11882 - 11421 - 11422 11431 - 11432 - 11883 - 11884 - 11698
		GFI 10	22011	
	S Kit Ceiling kit	100/4"	22154	11150 - 11153 - 11201 - 11202 - 11203 - 11211 - 11212 - 11681 - 11682 - 11221 - 11222 - 11223 - 11231 - 11232 - 11683 - 11684 - 11616
		120/5"	22155	11301 - 11302 - 11311 - 11312 - 11781 - 11782 - 11783 11321 - 11322 - 11331 - 11332 - 11784 - 11692
		150/6"	22156	11401 - 11402 - 11411 - 11412 - 11881 - 11882 - 11421 - 11422 - 11431 - 11432 - 11883 - 11884 - 11698
	GA	12V	22150	11203 - 11223
		12V T	22151	11203 - 11223

Accessories on request (description and technical data on page 158)

F KIT - KIT TO WINDOW-MOUNT

Technical data and dimensions of the "product+kit".

MODELS	KIT	CODE	W	A	RPM	MAX AIRFLOW		Lp dB(A) 3 m	MAX °C	Kg
						m³/h	l/s			
M 100/4"	F 100/4"	22131	18	0.10	2300	85	23.6	38	50	0.85
M 120/5"	F 120/5"	22132	20	0.12	2000	140	38.9	40.5		1.15
M 150/6"	F 150/6"	22133	30	0.15	1950	280	77.8	44.5		1.56

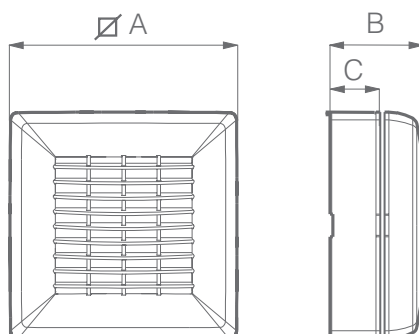

MODELS	Ø A	B	C	Ø GLASS HOLE	THICKNESS
M 100/4"	158	69	22	123 ÷ 128	20
M 120/5"	179	80	33	143 ÷ 148	
M 150/6"	213	87	40	178 ÷ 183	


Dimensions (mm)

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11122 - 11123 - 11131 - 11124 - 11132 - 11125 - 11133
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	SF KIT - Ceiling kit	90 - 100	11122 - 11126 - 11123 - 11131 - 11127 11135 - 11185 - 11139
		120	11124 - 11132 - 11128 - 11136 - 11186 - 11149
		150	11125 - 11133 - 11129 - 11137 - 11187 - 11176


Accessories on request (description and technical data on page 146)

APPLICATIONS

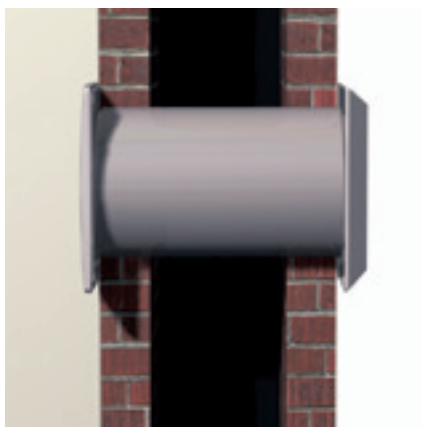



PERFORMANCE CURVES

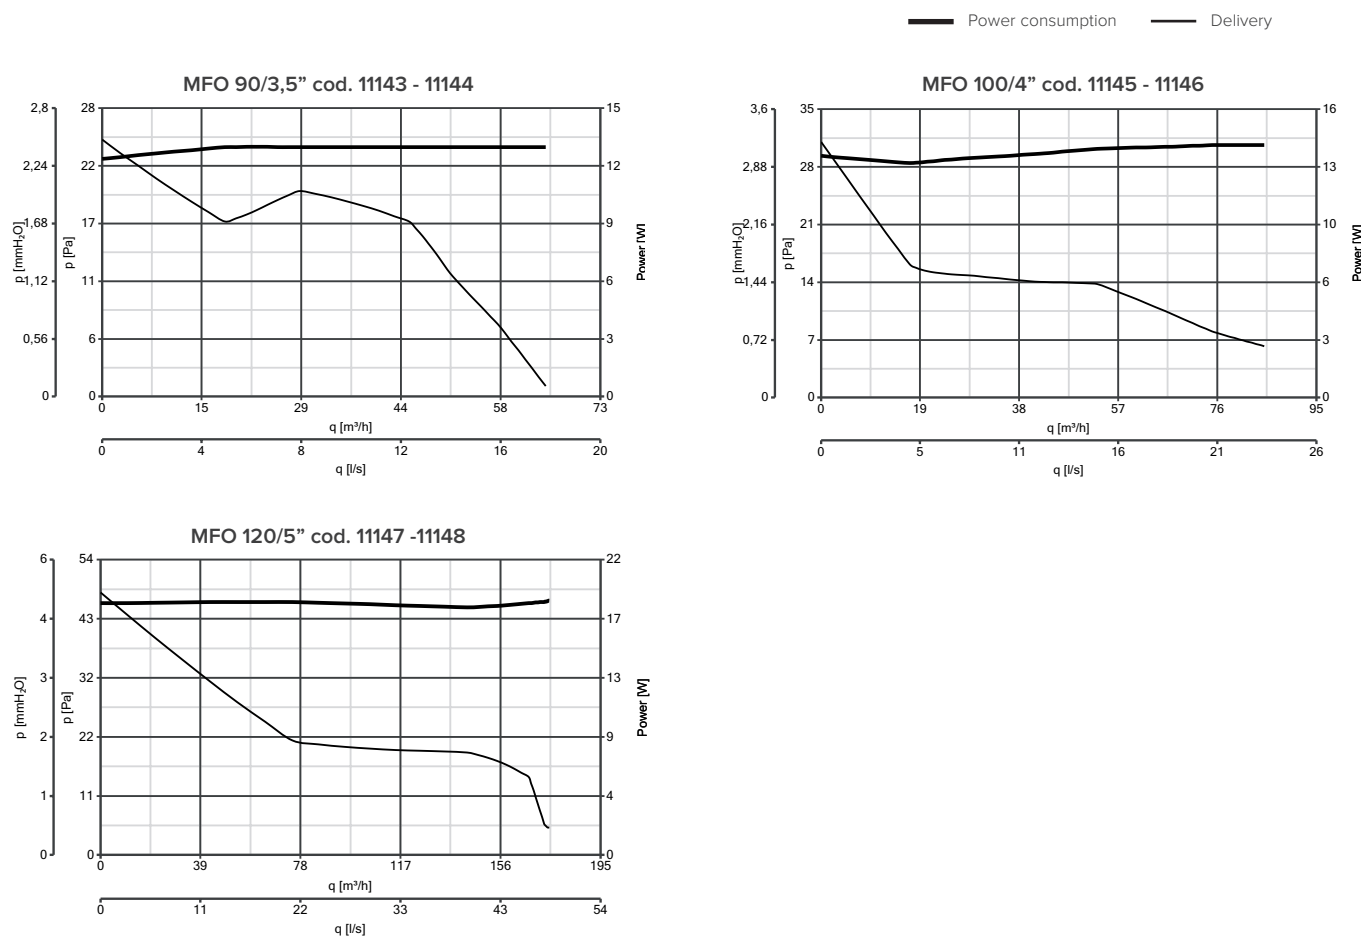

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11143 - 11145 - 11147
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	SF KIT - Ceiling kit	90 - 100 22162	11143 - 11144 - 11145 - 11146
		120 22163	11147 - 11148

Accessories on request (description and technical data on page 158)







RESIDENTIAL VENTILATION

PUNTO GHOST RANGE

PERFORMANCE CURVES

— Power consumption — Delivery

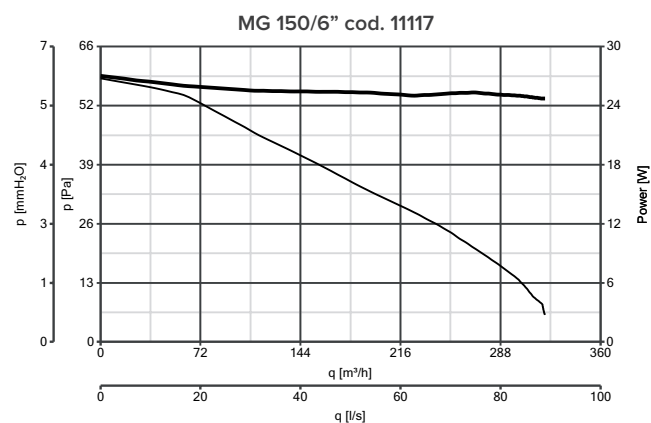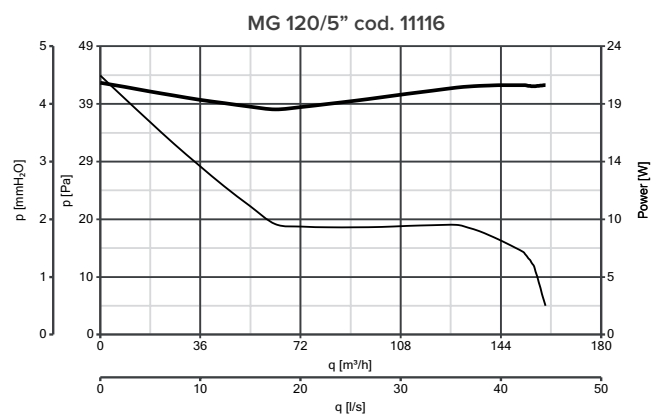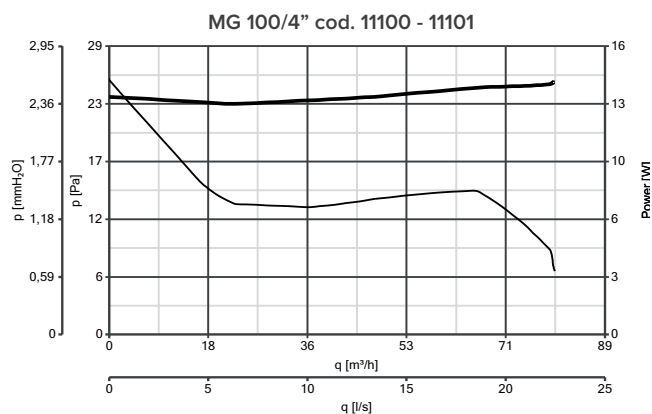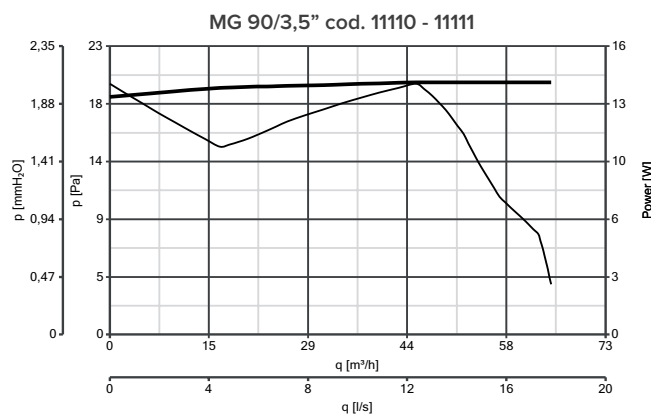

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT	
	C 1.5 Electronic speed controller 1.5 A	12966	11110 - 11100 - 11116 - 11102 - 11117 - 11104	
	SCNRB Electronic speed controller built-in	12971	11110 - 11116 - 11117	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966	
	Flexible duct	Ø 90/100	22250	11110 - 11111
		Ø 120	22251	11116 - 11102 - 11103
		Ø 150	22252	11117 - 11104 - 11105
	Telescopic wall liner	Ø 100/4	22256	11110 - 11111
		Ø 120/5	22257	11116 - 11102 - 11103
		Ø 150/6	22258	11117 - 11104 - 11105
	Loft mounting brackets	Ø 90/100	22259	11110 - 11111 - 11100 - 11101
		Ø 120	22260	11116 - 11102 - 11103
		Ø 150	22261	11117 - 11104 - 11105
	Grille kit	90/3	22143	11110 - 11111
		100/4	22140	11100 - 11101
		120/5	22141	11116
		150/6	22142	11117



Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION

K RANGE

PERFORMANCE CURVES

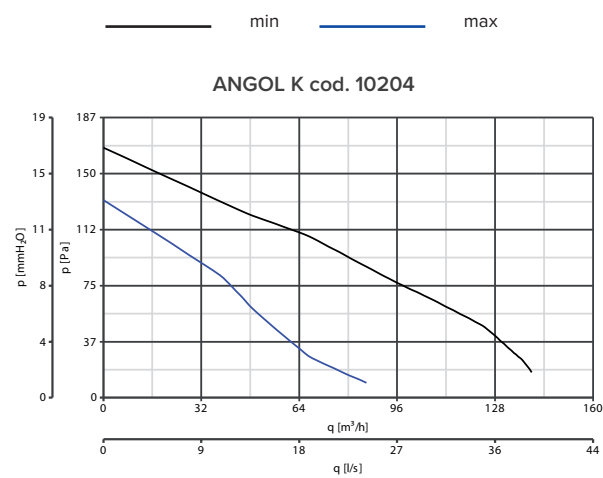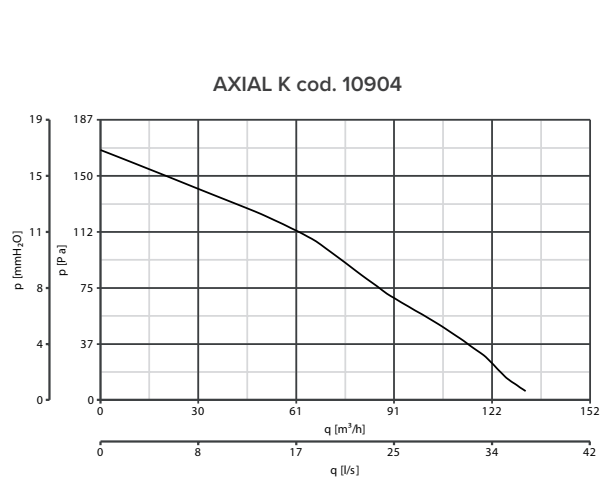


ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	All products
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966
	Air deflector	10/4	All products
	CA MU - Galvanized sheet-metal brackets	22674	

Accessories on request (description and technical data on page 158)


DIMENSIONS

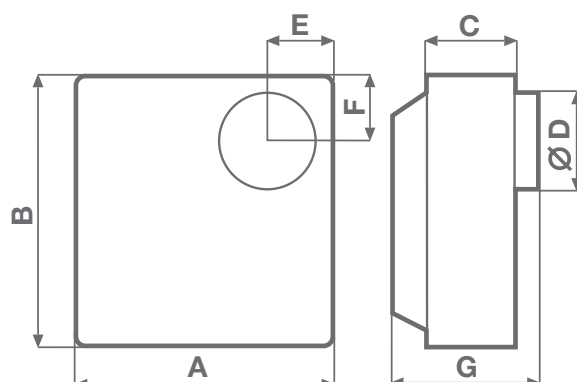

MODELS	A	B	C	Ø D	E	F	G
VORT KAPPA	252	270	90	97	65	65	145

Dimensions (mm)

PERFORMANCE CURVES

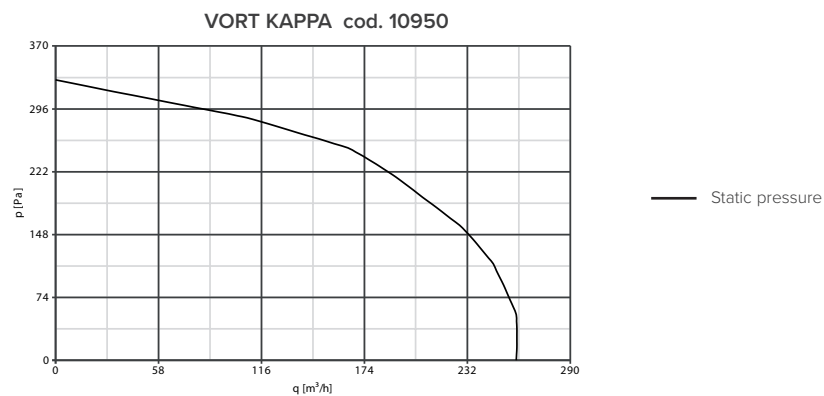


ACCESSORIES ON REQUEST


MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	10950
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	10950

Accessories on request (description and technical data on page 158)

MAIN COMPONENTS

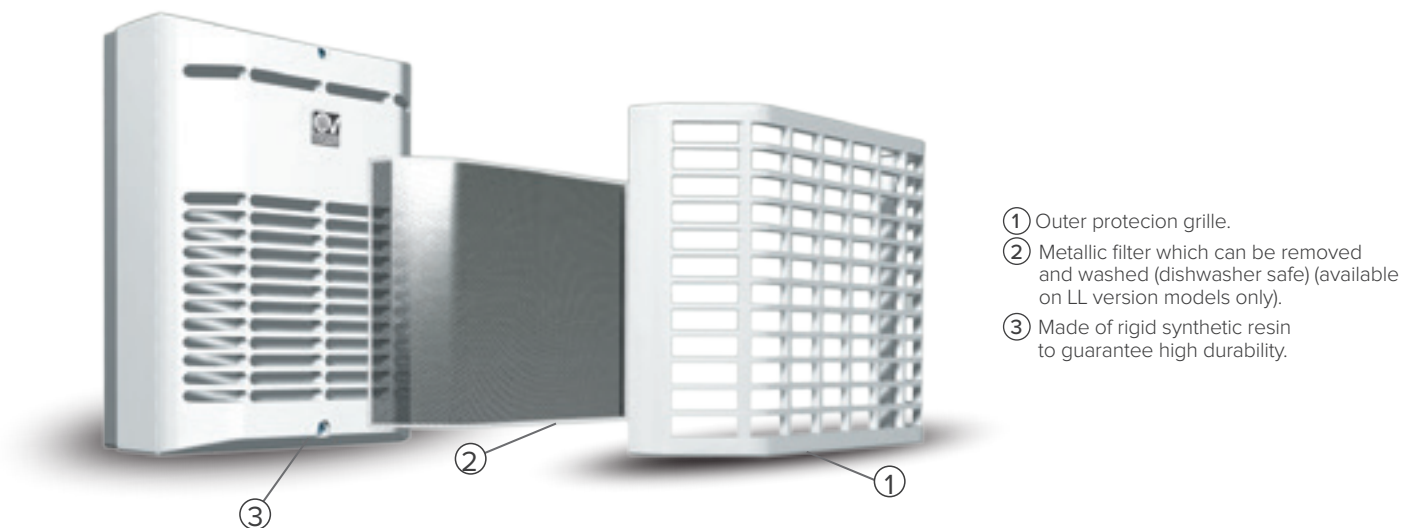

PERFORMANCE CURVES

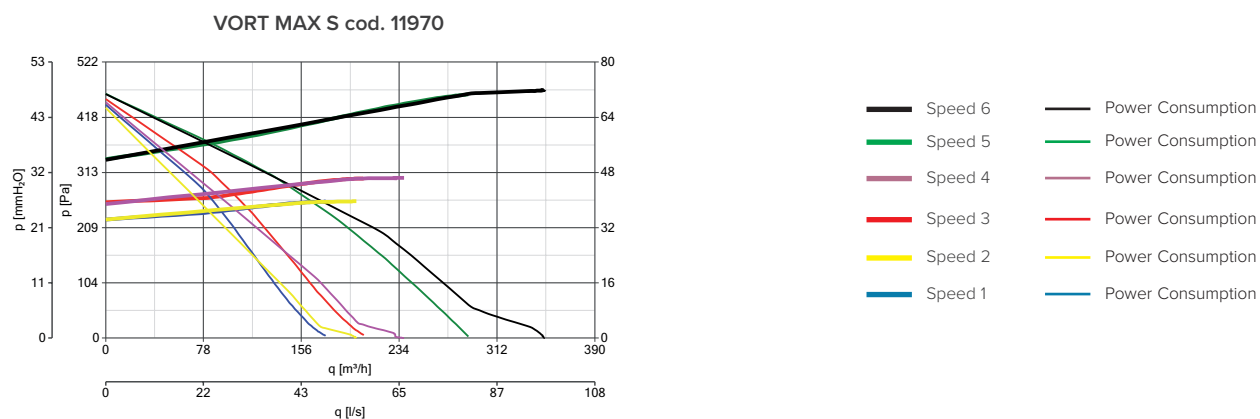

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11970
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector	10/4 22310	11970
		12/5 22320	


Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION

ARIETT RANGE

PERFORMANCE CURVES

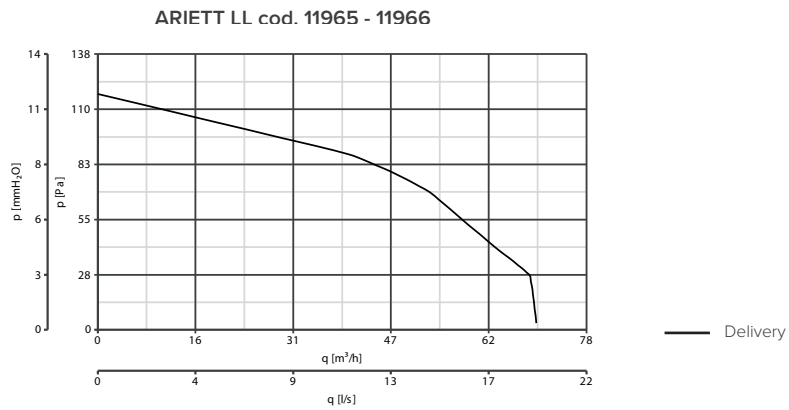


ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11965
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products

Accessories on request (description and technical data on page 158)


MAIN COMPONENTS

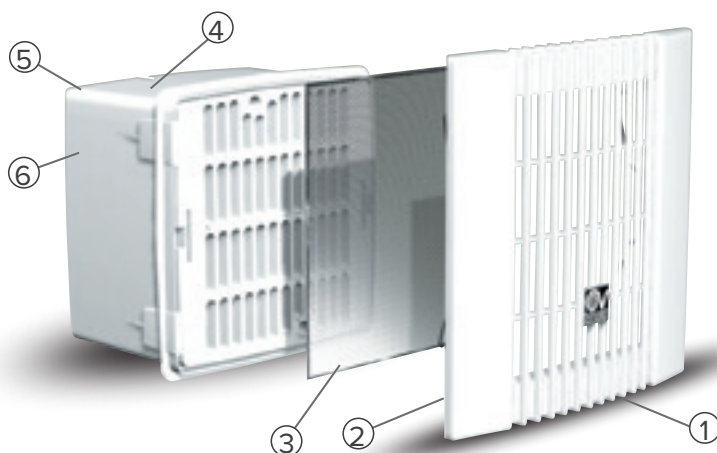

- ① Unobtrusive front grille.
- ② Support springs for the front grille, suitable for 65 mm max false ceilings.
- ③ Metallic filter which can be removed and washed (dishwasher safe) (available on LL version models only).
- ④ Made of rigid synthetic resin to guarantee high durability.
- ⑤ 100 mm dia. Outlet spigot which can be positioned to the rear or side (using optional accessories).
- ⑥ Backdraught-shutter to avoid back-flow when unit is turned off.

PERFORMANCE CURVES

ARIETT LL I cod. 12010 - 12011

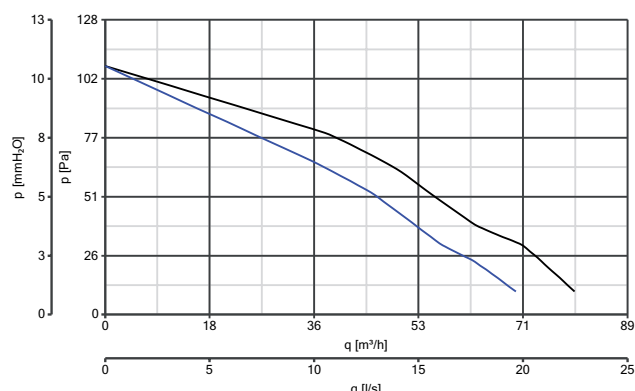

— Power consumption — Delivery

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	12010
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products
	High profile connector	22841	
	False-ceiling/wall installation kit	22823	
	Horizontal Outlet - Low Profile	22842	All Products
	Horizontal Outlet - High Profile	22823	All Products


Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION

ARIETT HABITAT RANGE

PERFORMANCE CURVES

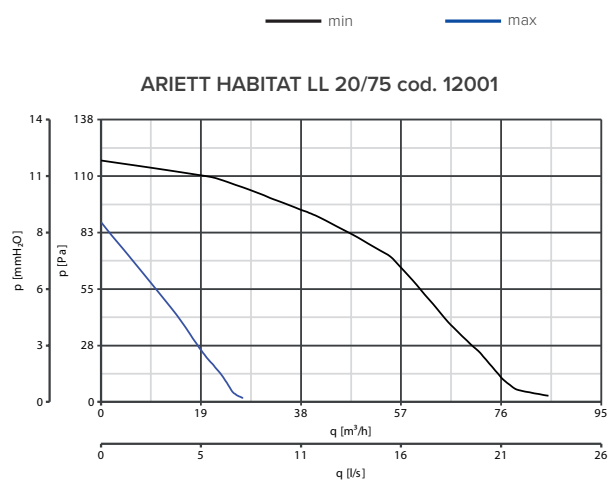

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
 	C 1.5 Electronic speed controller 1.5 A	12966	12000
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products
	Horizontal Outlet - Low Profile	22842	All Products
	Horizontal Outlet - High Profile	22823	All Products


Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION



VORT PRESS RANGE

MAIN COMPONENTS

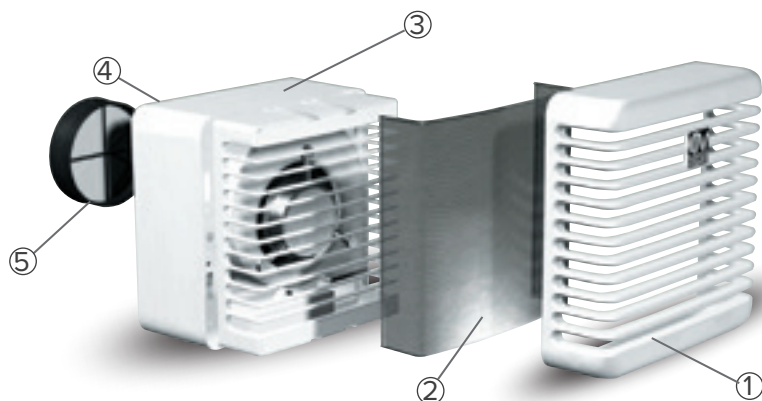

- ① Front grille.
- ② Metallic filter which can be removed and washed (dishwasher safe).
- ③ Made of rigid synthetic resin to guarantee high durability.
- ④ 100 mm dia. outlet spigot.
- ⑤ Silicon backdraught shutter to avoid back-flow when the unit is turned off.

PERFORMANCE CURVES

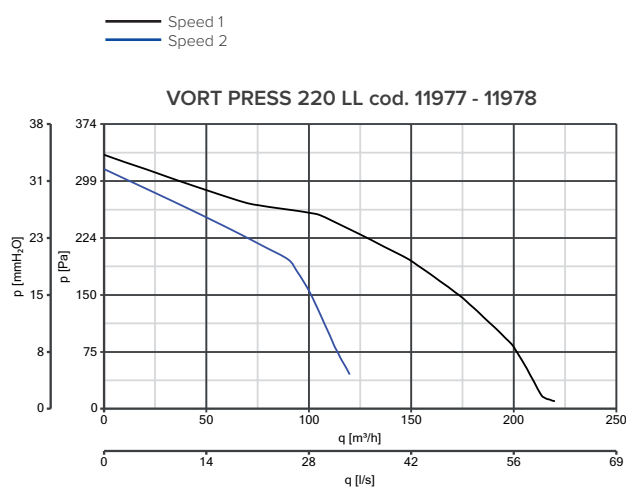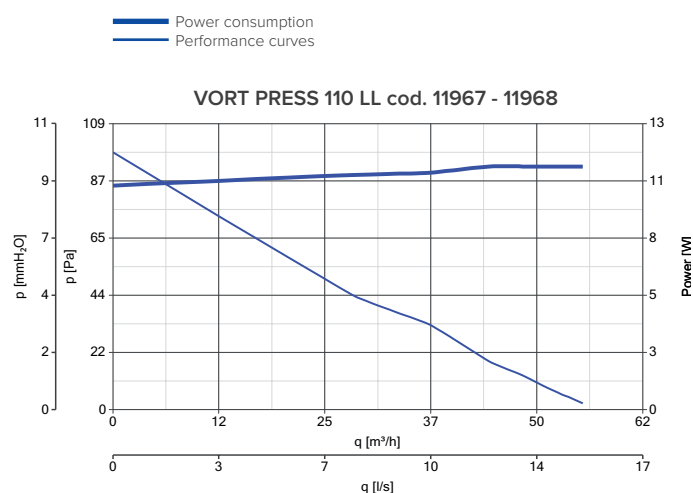


ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11967 - 11977
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products

Accessories on request (description and technical data on page 158)

PERFORMANCE CURVES

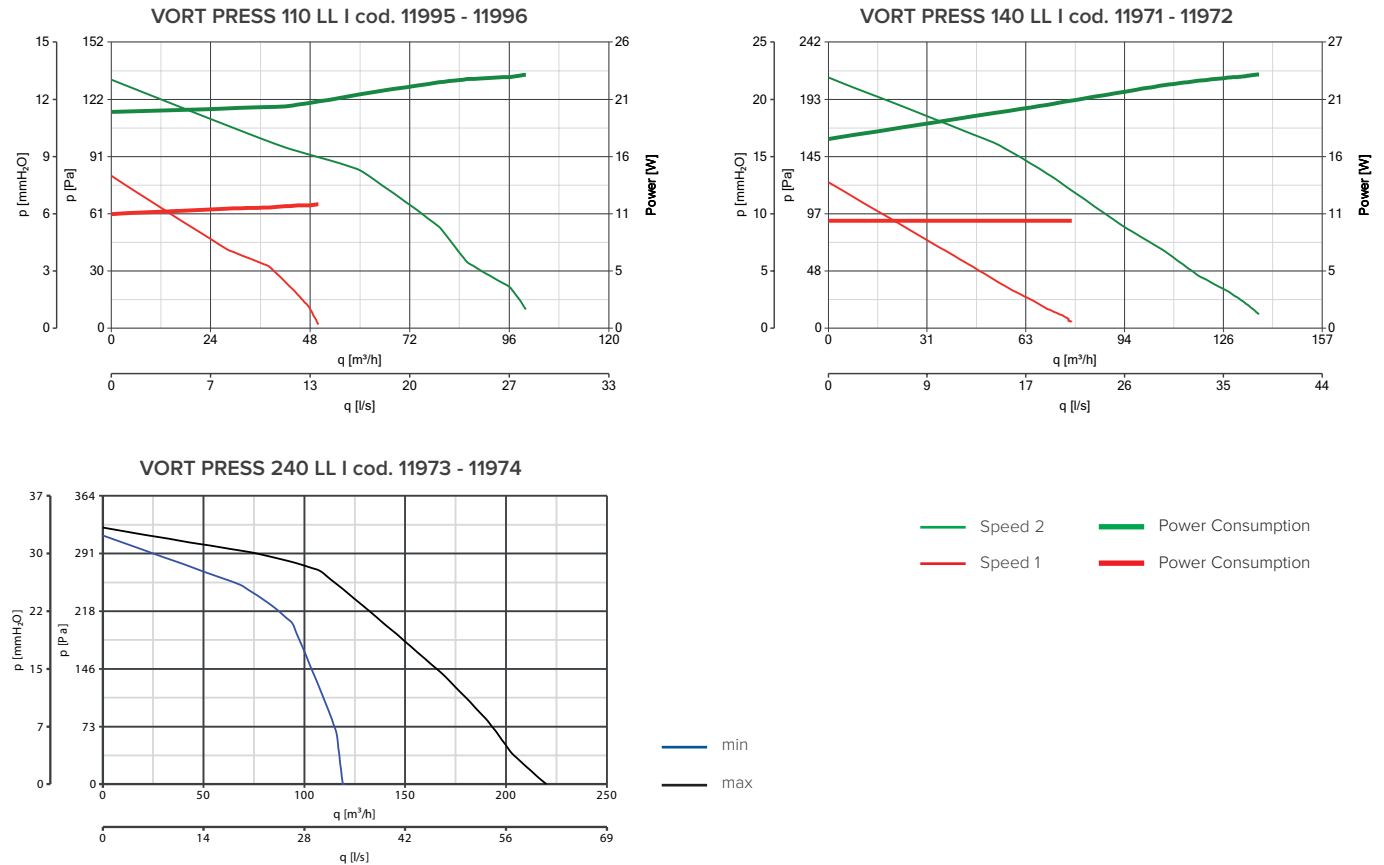


ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11995 - 11971 11973
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products
	High profile connector	22841	
	False-ceiling/wall installation kit	22823	22823
		22815	11971 - 11972 - 11973 - 11974
	Horizontal Outlet - Low Profile	22842	All Products
	Horizontal Outlet - High Profile	22823	All Products



Accessories on request (description and technical data on page 158)

MAIN COMPONENTS

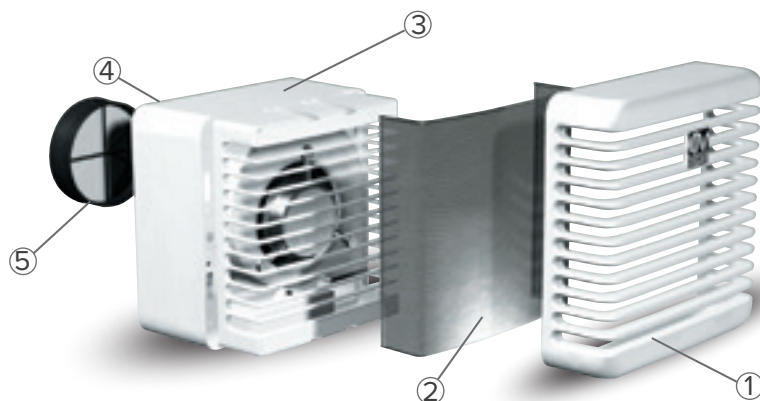

- ① Front grille.
- ② Metallic filter which can be removed and washed (dishwasher safe).
- ③ Made of rigid synthetic resin to guarantee high durability.
- ④ 100 mm dia. outlet spigot.
- ⑤ Silicon backdraught shutter to avoid back-flow when the unit is turned off.

PERFORMANCE CURVES

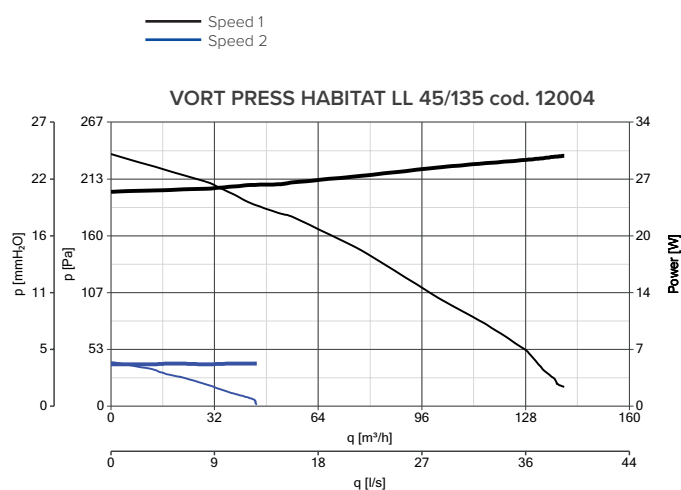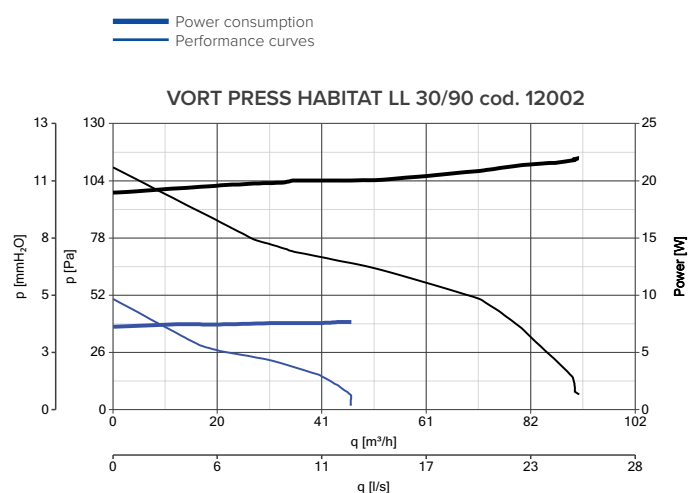


ACCESSORIES ON REQUEST

Models	Description	Code	Product
	C 1.5 Electronic speed controller 1.5 A	12966	All products
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector	10/4 22310	All products

Accessories on request (description and technical data on page 158)

PERFORMANCE CURVES

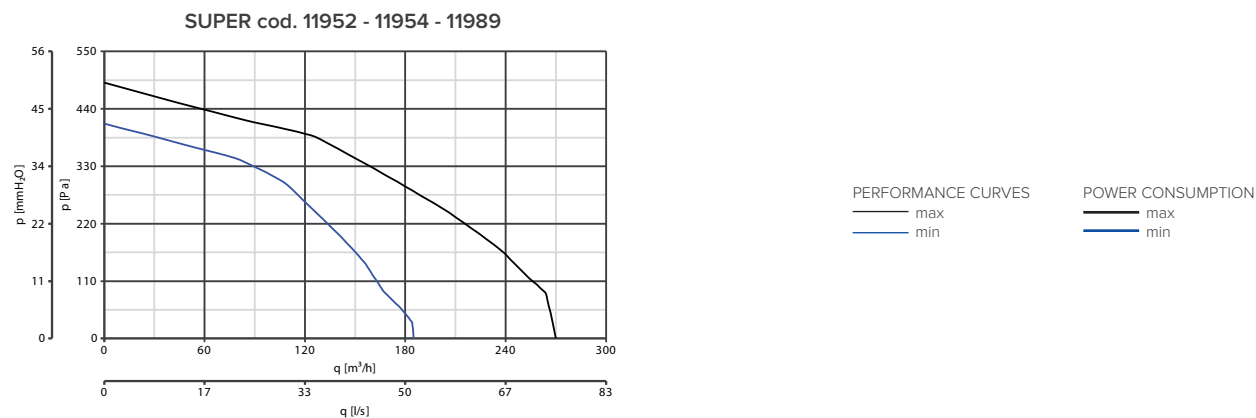

ACCESSORIES ON REQUEST


MODELS	DESCRIPTION	CODE	PRODUCT
 	C 1.5 Electronic speed controller 1.5 A	12966	11638 - 11936 - 11937 - 11944 - 11952
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products

Accessories on request (description and technical data on page 158)

APPLICATIONS




MAIN COMPONENTS

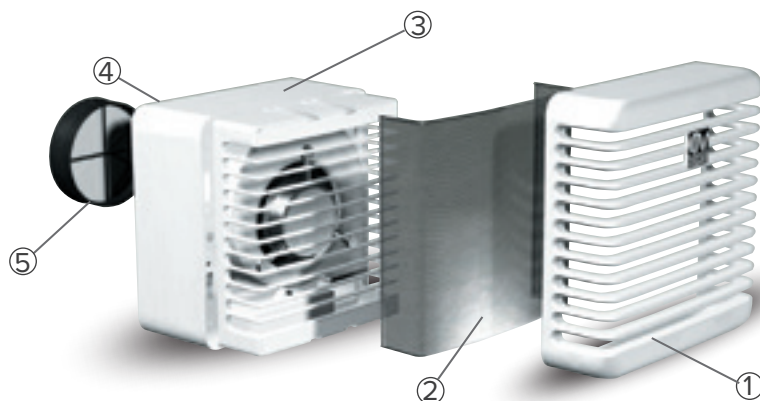

- ① Front grille.
- ② Metallic filter which can be removed and washed (dishwasher safe).
- ③ Made of rigid synthetic resin to guarantee high durability.
- ④ 100 mm dia. outlet spigot.
- ⑤ Silicon backdraught shutter to avoid back-flow when the unit is turned off.

PERFORMANCE CURVES

VORT PRESS 220 LL EP cod. 11554 - 11555

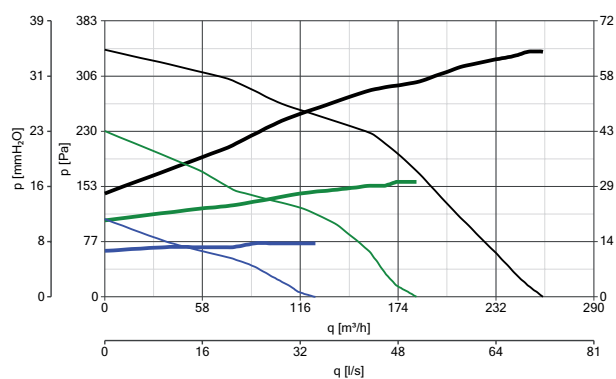


- Speed 3
- Speed 2
- Speed 1
- Power Consumption
- Power Consumption
- Power Consumption

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11554
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products

Accessories on request (description and technical data on page 158)


MAIN COMPONENTS

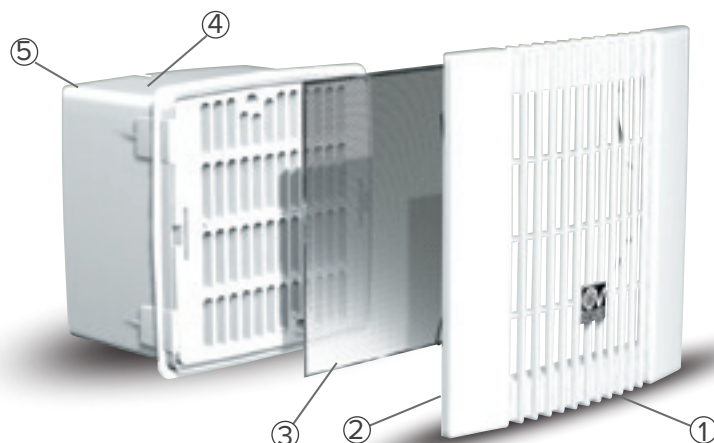

- ① Unobtrusive front grille with support springs which clamp it to the surface, making it suitable for all types of walls and ceilings (max 65 mm).
- ② Metallic filter can be removed and washed (dishwasher safe).
- ③ Made of rigid synthetic resin to guarantee high durability.
- ④ On 110 model, the outlet spigot can be changed to a high or low level spigot.
- ⑤ Silicon backdraught shutter on 140 and 240 models to avoid back flow when unit is turned off.

PERFORMANCE CURVES

VORT PRESS 240 LL I EP cod. 11552 - 11553

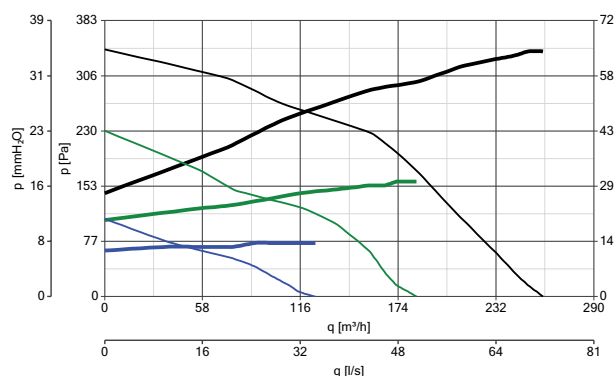

- Speed 3
- Speed 2
- Speed 1
- Power Consumption
- Power Consumption
- Power Consumption

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	11522
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966
	Air deflector 10/4	22310	All products
	High profile connector	22841	
	False-ceiling/wall installation kit	22823	22823
		22815	11522 - 11553
	Horizontal Outlet - Low Profile	22842	All Products
	Horizontal Outlet - High Profile	22823	All Products


Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION

VORT KAPPA EP RANGE

PERFORMANCE CURVES

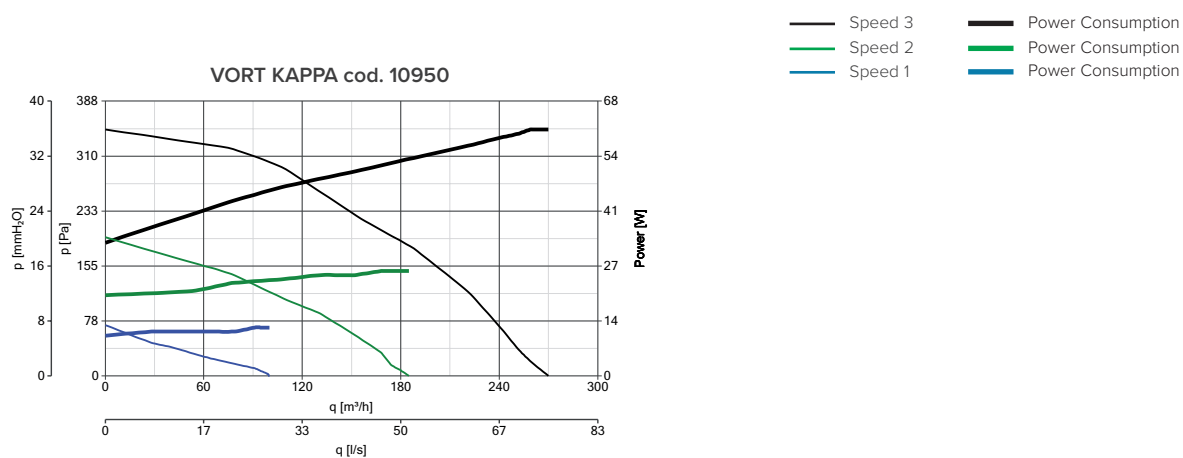

ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	10950
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966
	Air deflector	10/4 22310	10950


Accessories on request (description and technical data on page 158)



RESIDENTIAL VENTILATION

VORT QUADRO EP AC RANGE

DIMENSIONS

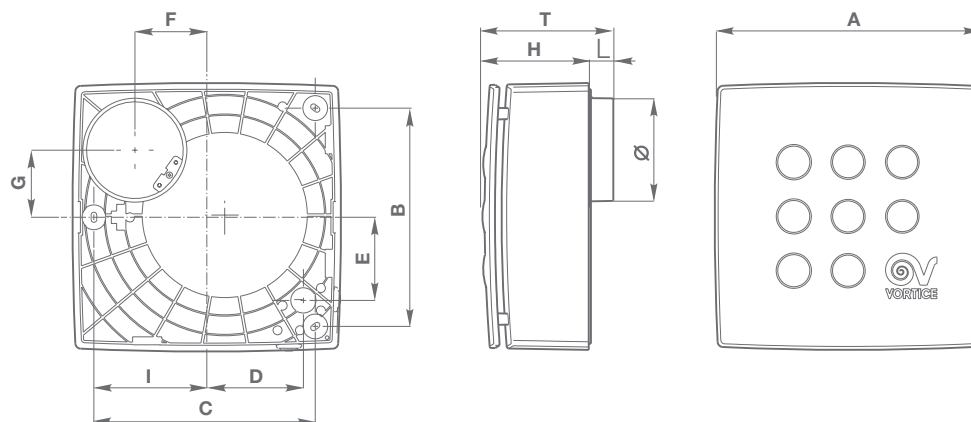



MODELS	A	B	C	D	E	F	G	H	I	L	T	Ø
MEDIO EP AC	261	212	215	95	82	75	69	119	110	20	138	92.5/97
SUPER EP AC	290	236	239	108	92	87	81	144	125		164	

Dimensions (mm)

PERFORMANCE CURVES

Speed 3
Speed 2
Speed 1
Power Consumption

Speed 4
Speed 3
Speed 2
Speed 1
Power Consumption





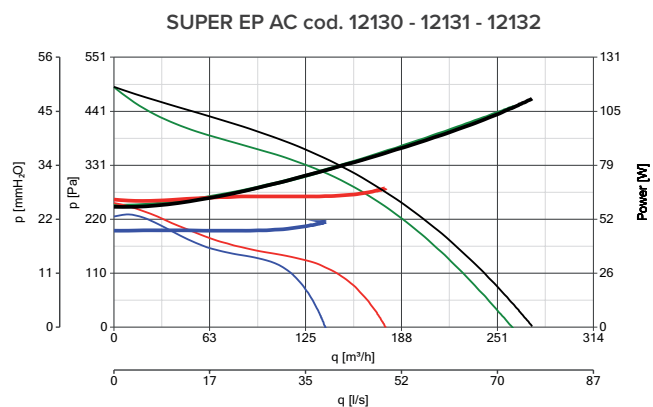
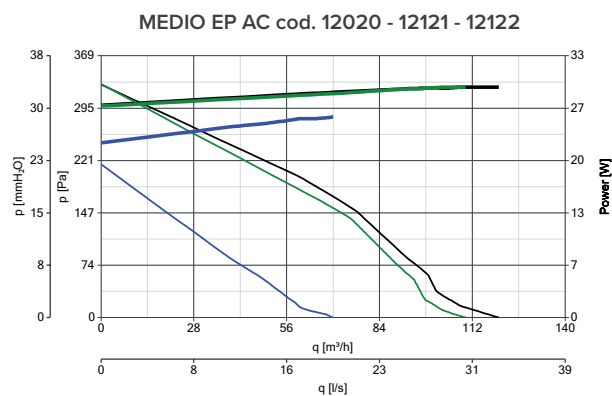


ACCESSORIES ON REQUEST

MODELS	DESCRIPTION	CODE	PRODUCT
	C 1.5 Electronic speed controller 1.5 A	12966	12090 - 12110
	SCNRB Electronic speed controller built-in	12971	
	SCB KIT Bult-in controller adaptor for C 1.5	22481	12966
	Air deflector	10/4	22310
			All products

Accessories on request (description and technical data on page 158)

ACCESSORIES

MODELS	DESCRIPTION				CODE										
	C4VM16 - Four-speed selector, single phase <table><tr><th>MODELS</th><th>Ø A</th><th>C</th></tr><tr><td>C4VM16</td><td>120</td><td>55</td></tr></table> Dimensions (mm) 				MODELS	Ø A	C	C4VM16	120	55	12949				
MODELS	Ø A	C													
C4VM16	120	55													
	C3VM3 - Three speed selector, single phase <table><tr><th>MODELS</th><th>Ø A</th><th>C</th></tr><tr><td>C3VM3</td><td>120</td><td>43</td></tr></table> Dimensions (mm) 				MODELS	Ø A	C	C3VM3	120	43	14021				
MODELS	Ø A	C													
C3VM3	120	43													
	C 1.5 Non reversible variable electronic speed controller - Not suitable for products with timer or automatic shutters - Convertible to flush-mounted using SCB5 kit - Weight 0.2 Kg - Maximum load: 200 W (for C 1.5) - Double insulation <table><tr><th>MODELS</th><th>Ø A</th><th>C</th></tr><tr><td>C 1.5</td><td>120</td><td>43</td></tr></table> Dimensions (mm) 				MODELS	Ø A	C	C 1.5	120	43	12966				
MODELS	Ø A	C													
C 1.5	120	43													
	SCNRB Non reversible variable electronic speed controller (built-in) - Not suitable for products with timer or automatic shutters - Weight 0.2 Kg - Maximum load: 200 W - Double insulation <table><tr><th>MODELS</th><th>Ø A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>SCNRB</td><td>142</td><td>135</td><td>59.5</td><td>4.5</td></tr></table> Dimensions (mm) 				MODELS	Ø A	B	C	D	SCNRB	142	135	59.5	4.5	12971
MODELS	Ø A	B	C	D											
SCNRB	142	135	59.5	4.5											
	C5 0.5 5 position speed controller - 5 speeds controller - Not suitable for timer, automatic, automatic timer and cord operated appliances - Convertible to flush-mounted using SCB5 kit - Weight 0.2 Kg - Double insulation Non reversible variable electronic speed controller (built-in) - Not suitable for products with timer or automatic shutters - Weight 0.2 Kg - Maximum load: 200 W - Double insulation <table><tr><th>MODELS</th><th>Ø A</th><th>C</th></tr><tr><td>C 1.5</td><td>120</td><td>43</td></tr></table> Dimensions (mm) 				MODELS	Ø A	C	C 1.5	120	43	12987				
MODELS	Ø A	C													
C 1.5	120	43													