

PULLCAP MODULAR FUSE-HOLDERS

TYPE LPC




The PULLCAP 240/415 V a.c. modular fuse-holders incorporate fuse-links to BS88: Part 1 and BS1361.

Note: Individual components are available as fully assembled LPCU units rated at 5, 20, 32 & 63 Amps.

Component	Current Rating (A)	Colour	List Reference	Lawson Fuse-Link	Solid Link
Carrier	5	White	LPC 5 CA WH	LA	SLPC5
	5	Black	LPC 5 CA BK	LA	SLPC5
	20	Blue	LPC 20 CA BL	LC	SLPC 20
	20	Green	LPC 20 CA GN	LC	SLPC 20
	32	Red	LPC 32 CA RD	LD	SLPC 32
	32	Black	LPC 32 CA BK	MD	SLPC 32
Cover Plate	5	White	LPC 5 CP WH	LA	
	5	Black	LPC 5 CP BK	LA	
	20	Blue	LPC 20 CP BL	LC	
	20	Green	LPC 20 CP GN	LC	
	32	Red	LPC 32 CP RD	LD	
	32	Black	LPC 32 CP BK	MD	
Base	5	Black	LPC 00 CP BK	ME	
	63	Black	LPC 63 CP BK		
			LPC 32 FC/FC	DIN rail adaptor LPC 32 DA	
			LPC 32 FC/BC		
			LPC 32 BC/BC		
			LPC 32 FC/FCL		
			LPC 32 FCL/FCL		
			LPC 63 FC/FC		
			LPC 63 FC/BC		
			LPC 63 BC/BC		
			LPC 63 BC/BC		
			LPC 63 FCL/FCL		

Dimensional Drawings Type LPCU

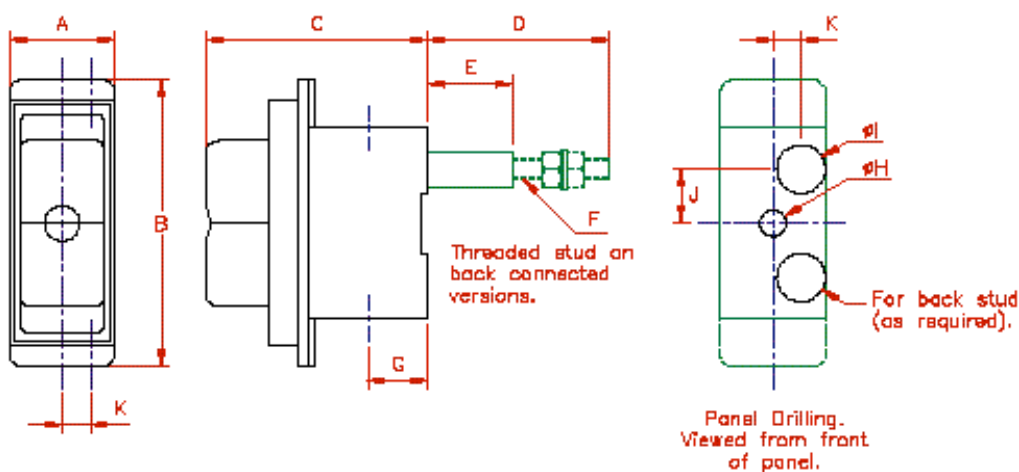

LAWSON REFERENCE	CURRENT RATING (AMPS)	GENERAL DIMENSIONS (mm)										
		A	B	C	D	E	F	G	H	I	J	K
LPCU5	5	23.8	65	44	41	19	28A	13.5	8	11	13	8.35
LPCU20	20	23.8	65	48	41	19	28A	13.5	8	11	13	8.35
LPCU32	32	23.8	65	50	41	19	28A	13.5	8	11	13	8.35
LPCU63	63	35	96.5	72	83.5	22	54W	15	7	20	21.5	8.35