


UCP540

POLYESTER COMPACT WALL MOUNTED ENCLOSURES

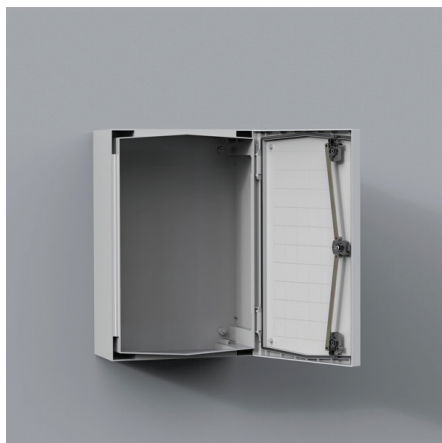

Plain door

D	230
H	515
N° of locking points	3
W	415
Weight (kg)	6,90
Item no.	UCP540

Material: Fibre-glass reinforced polyester. UCPT viewing area: polycarbonate.

Body: Monoblock moulded 3 mm thick. Four holes for direct wall fixing. Without gland plate openings.

Door: Door with or without window and 180° opening. For UCP/UCPT750 and above a door support is supplied for easier closing. Sealing is by an injected one piece polyurethane gasket.

Lock: Double-bit 3 mm insert and 90° movement. UCP/UCPT540 and above have three locking points. Other locks are available as an accessory.

Temperature resistance: -50°C to 70°C in continuous use (peak temperatures up to 150°C).

Characteristics: Self extinguishing and halogen free. Double isolated according to EN61439-1. Rated insulation voltage $U_i=1000V$.

Protection: IP 66 | TYPE 4, 4X, 12, 13. Impact resistance IK 10 (IK 07 for enclosures with transparent door).

Finish: RAL 7035, precoloured raw material.

Delivery: Enclosure with door, fixing screws for the mounting plate and a self adhesive rain strip.

Approvals: CE, GOST. CSA and cULus_listed approvals apply to plain door enclosures only. For further approvals please contact Eldon's sales department.