

## Terminal markers DEK 5 GW ERDE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

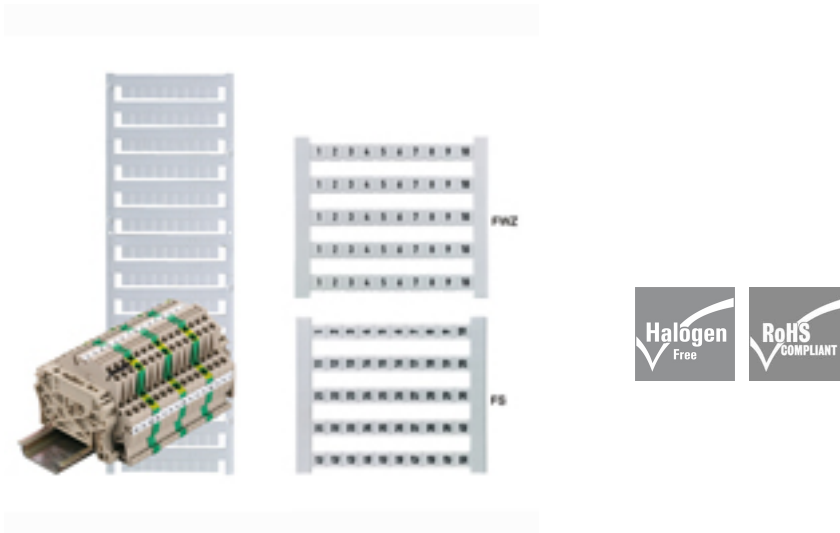

The dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a large range of ready-printed markers. Strips for fast installation in one work step. The printing is easy to read, rich in contrast, and is available in five widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Connector markers, suitable for all Weidmüller cable connectors
- Available as blank cards, MultiCard or as cards with standard printing

### General ordering data

Type	DEK 5 GW ERDE
Order No.	<a href="#">0576261202</a>
Version	Terminal markers, Card, 5 x 5 mm, Polyamide, Colour: White
GTIN (EAN)	4008190040352
Qty.	500 pc(s).

## Terminal markers DEK 5 GW ERDE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Length	5 mm	Width	5 mm
Net weight	0.058 g		

### Markings

Cadmium	No	Can be labelled with thermal transfer printers	No
Can be printed with plotter	No	Can be written with dot-matrix printer	No
Can be written with laser printer	No	Colour	White
Colour of printing	Black	Conductor O.D.	
Halogen	No	Material	Polyamide
Material colour according to resistance code	9	Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C	Orientation of print	horizontal
Pin can be written (STI)	No	Pitch in mm (P)	5 mm
PrintJet	No	Printed characters	Symbols
Printing method	MC Laser	Silicone	No
Speed marking laser	No	UL 94 flammability rating	V-2

### Classifications

ETIM 2.0	EC000761	ETIM 3.0	EC000761
UNSPSC	30-21-18-07	eClass 4.1	24-19-02-19
eClass 5.1	27-14-11-37	eClass 6.2	27-14-11-37
eClass 7.1	27-14-11-37		

### Approvals

ROHS	Conform
------	---------