
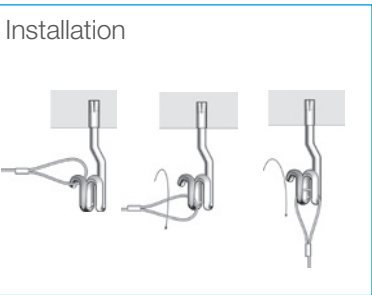


Adaptors

Pigtail

- Fast and secure anchor suitable for use with the Loop End Fixing (page 58)
- Ideal for use with the Drop-In Anchor (page 74)
- Allows Loop to be removed for maintenance





5:1 Safety rating - dependent on base material

Product code	A	B (mm)	C (mm)	Max. SWL (kg)	Quantity
PIGTAIL6-20MM	M6	20	76	90	10
PIGTAIL6-45MM	M6	45	102	90	10
PIGTAIL8-45MM	M8	45	118	150	10

Turnbuckle

- Ideal for cold room panels
- One end with closed-eye/one end with straight threaded rod
- Use with the Standard Hanger (page 30)

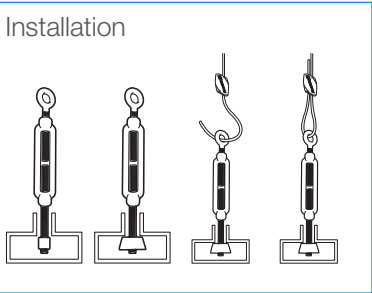



5:1 Safety rating - dependent on material

Product code	A	B (mm)	C (mm)	Max. SWL (kg)	Quantity
TBK8-R80	M8	14	80	325	10
TBK8-R200	M8	14	200	325	10
TBK10-R200	M10	14	200	325	10

Spring Clip

- Used for attaching to services such as trunking and lighting
- For 6 mm - 8 mm holes
- Ideal for use with the Standard Hanger (page 30)

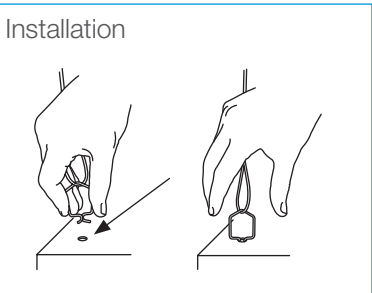



3:1 Safety rating - dependent on material thickness

Product code	A (mm)	B (mm)	Max. SWL (kg)	Quantity
CLIP-SPG-68	24	38	30	100

LSK Clip

- General purpose clip to support light fittings
- Steel with zinc plated finish

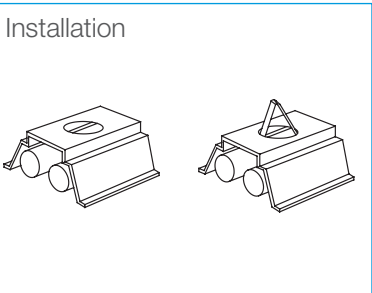



3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
CLIP-LSK	8	35	51	3.8	100

V-Bracket

- Attaches to the top of light fittings
- Easily fits into mounting holes
- Steel with zinc plated finish
- In-line or right angled mounting hooks available

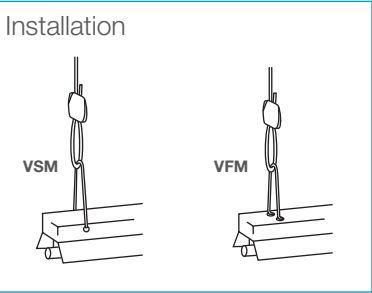
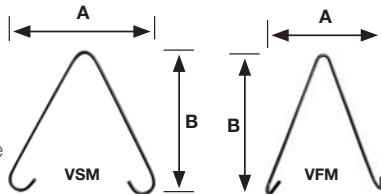


5:1 Safety rating

Product code	A (mm)	B (mm)	Max. SWL (kg)	Quantity
BRACKET-VSM	111	126	15	100
BRACKET-VFM	88	111	15	100

Acoustic Spring Anchor


- Ideal for use with the Standard Hanger, Angel Hook or Express
- Available in standard (40 mm) and large size (70 mm) with 2 mm wire diameter
- No tools required for installation
- Sold as part of a kit call 0800 018 4264 for more information
- Maximum load ratings will vary. Contact Gripple Technical Services for more information

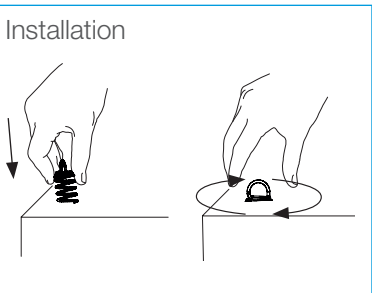

A (mm)	B (mm)	C (mm)	Kit Quantity
17	47	28	10
27	97	72	10

T-Bar Twist Clip

- Ideal for attaching to suspended ceilings
- Integral M6 thread
- Ideal for use with the Barrel End Fixing (page 61)
- Suitable for 25 mm T-Bar





5:1 Safety rating

Product code	A	B (mm)	C (mm)	Max. SWL (kg)	Quantity
TBAR-CLIP-M6	M6	16	25	22	100

Uni-Wedge

- One universal fitting to fit many decking profiles available in the UK
- Ideal for use with the Stud End fixing (page 58)
- Suitable for: Kingspan Multideck 60 and 80
Richard Lees Ribdeck 80/AL and E60 SMD TR60 and TR80

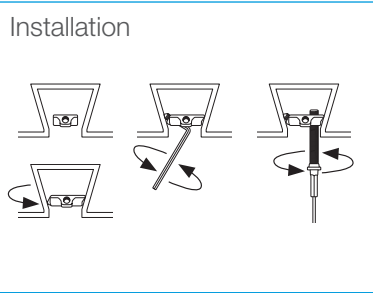



3:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
UNI-WEDGE	33	44	12.5	100	10

Wedge Nuts

- Ideal for use with the Stud End Fixing (page 58)
- Also supplied as a Decking Wedge End Fixing (page 68)
- Available in 18 mm and 25 mm sizes

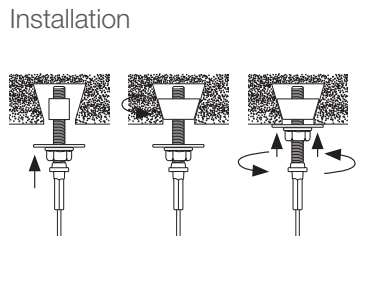



3:1 Safety rating

Product code	A	B (mm)	C (mm)	Max. SWL (kg)	Quantity
WEDGE8-25	25	18	M8	200	10
WEDGE8-18	18	10	M8	200	10

Eyebolt

- Closed-eyes for ultimate strength
- Ideal for suspending services with Standard Hangers (page 30)
- Available fully threaded or partially threaded

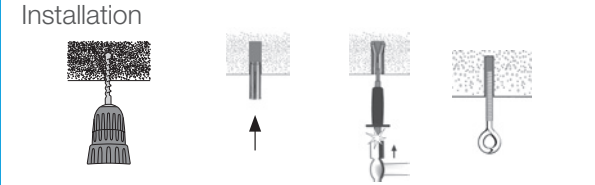



5:1 Safety rating

Product code	A	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
EYEBOLT-M8-130MM-F/TH	M8	13	130	168	325	10
EYEBOLT-M8-200MM-98MM	M8	13	98	230	325	10
EYEBOLT-M8-0.2M-F/TH	M8	13	190	230	325	10

Product code	A	B (mm)	C (mm)	D (mm)	Max. SWL (kg)	Quantity
EYEBOLT-M10-130MM-F/TH	M10	13	130	174	325	10
EYEBOLT-M10-200MM-98MM	M10	13	98	238	325	10
EYEBOLT-M10-0.2M-F/TH	M10	13	190	238	325	10

Link Hook

- Easy to attach and detach for loading cable tray
- Suitable for services that require access or maintenance
- Large inner dimension for easy fit
- Ideal for use with the Y-Fit and Y-Fit Accessory (page 42)

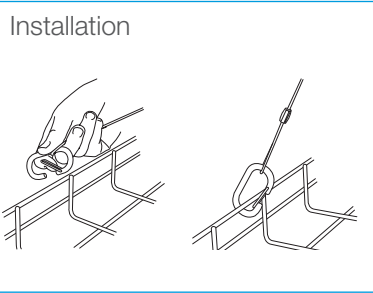



4:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	15.539 mm
LINK-HOOK	6	15	48	45	10

Karabiner

- Versatile fixing, easy to attach and detach
- Available in Stainless steel

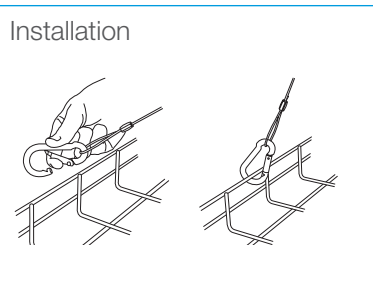

5:1 Safety rating

Product code	A (mm)	B (mm)	C (mm)	Max. SWL (kg)	Quantity
KARA-6-60	6	8	60	45	10
KARA-6-60-S	6	8	60	45	10
KARA-8-80	8	10	80	90	10
KARA-8-80-S	8	10	80	90	10