



T5 Triphosphor

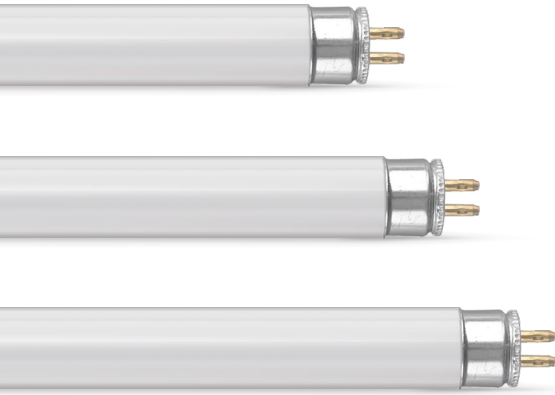

At only 16mm diameter, the T5 linear fluorescent range is used in slim luminaires and fixtures and is available in High Efficiency (HE) for maximum energy saving or High Output (HO) for maximum lumen output.

- 20,000 hour life
- 85/1B colour rendering index/group
- SPECTRA-PLUS Triphosphor
- 3500K white, 4000K cool white or 6500K daylight colour options
- Excellent colour rendering and high lumen maintenance
- Designed for use with High Frequency ballasts

Product Code	Watts (W)	Cap	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Colour Rendering Index/Group	Dimensions (mm)		Energy Rating	Order Qty
							Dia	L		
High Efficiency (HE) Single Sleeve										
FTT514SPW	14	G5	White	3500	1205	85/1B	16	562	A	30
FTT514SPCW	14	G5	Cool White	4000	1205	85/1B	16	562	A	30
FTT514SPDYLT	14	G5	Daylight	6500	1100	85/1B	16	562	A	30
FTT521SPW	21	G5	White	3500	1900	85/1B	16	849	A+	30
FTT521SPCW	21	G5	Cool White	4000	1900	85/1B	16	849	A+	30
FTT528SPW	28	G5	White	3500	2605	85/1B	16	1149	A	30
FTT528SPCW	28	G5	Cool White	4000	2605	85/1B	16	1149	A	30
FTT528SPDYLT	28	G5	Daylight	6500	2400	85/1B	16	1149	A	30
FTT535SPW	35	G5	White	3500	3300	85/1B	16	1449	A+	30
FTT535SPCW	35	G5	Cool White	4000	3300	85/1B	16	1449	A+	30
FTT535SPDYLT	35	G5	Daylight	6500	3050	85/1B	16	1449	A	30
High Output (HO) Single Sleeve										
FTT524SPW	24	G5	White	3500	1755	85/1B	16	549	A	30
FTT524SPCW	24	G5	Cool White	4000	1755	85/1B	16	549	A	30
FTT524SPDYLT	24	G5	Daylight	6500	1600	85/1B	16	549	A	30
FTT539SPCW	39	G5	Cool White	4000	3100	85/1B	16	849	A	30
FTT554SPCW	54	G5	Cool White	4000	4450	85/1B	16	1149	A	30
FTT549SPCW	49	G5	Cool White	4000	4315	85/1B	16	1449	A	30
FTT549SPDYLT	49	G5	Daylight	6500	3950	85/1B	16	1449	A	30
FTT580SPCW	80	G5	Cool White	4000	6160	85/1B	16	1449	A	40



G5 Cap



Experts in lighting since 1878

Shatterproof T5 Triphosphor


We now provide a range of fluorescent tube coatings for fragment retention. Our non-foodsafe coating is IEC 61549 compliant and are banded with a dual green band. These are an economical option for standard lamps for open and enclosed fittings.

- 20,000 hour life
- 85/1B colour rendering index/group
- SPECTRA-PLUS Triphosphor
- 3500K white, 4000K cool white or 6500K daylight colour options
- Excellent colour rendering and high lumen maintenance
- Designed for use with High Frequency ballasts



Product Code	Watts (W)	Cap	Colour Appearance	Colour Temp (K)	Initial Lumens (lm)	Colour Rendering Index/Group	Dimensions (mm)		Energy Rating	Order Qty
							Dia	L		
High Efficiency (HE) Single Sleeve										
FTT514SPW-S	14	G5	White	3500	1205	85/1B	16	549	A	30
FTT514SPCW-S	14	G5	Cool White	4000	1205	85/1B	16	549	A	30
FTT514SPDYLT-S	14	G5	Daylight	6500	1100	85/1B	16	549	A	30
FTT521SPW-S	21	G5	White	3500	1900	85/1B	16	849	A+	30
FTT521SPCW-S	21	G5	Cool White	4000	1900	85/1B	16	849	A+	30
FTT528SPW-S	28	G5	White	3500	2605	85/1B	16	1149	A	30
FTT528SPCW-S	28	G5	Cool White	4000	2605	85/1B	16	1149	A	30
FTT528SPDYLT-S	28	G5	Daylight	6500	2400	85/1B	16	1149	A	30
FTT535SPW-S	35	G5	White	3500	3300	85/1B	16	1449	A+	30
FTT535SPCW-S	35	G5	Cool White	4000	3300	85/1B	16	1449	A+	30
FTT535SPDYLT-S	35	G5	Daylight	6500	3050	85/1B	16	1449	A	30
High Output (HO) Single Sleeve										
FTT524SPW-S	24	G5	White	3500	1755	85/1B	16	549	A	30
FTT524SPCW-S	24	G5	Cool White	4000	1755	85/1B	16	549	A	30
FTT524SPDYLT-S	24	G5	Daylight	6400	1600	85/1B	16	549	A	30
FTT539SPCW-S	39	G5	Cool White	4000	3100	85/1B	16	849	A	30
FTT554SPCW-S	54	G5	Cool White	4000	4450	85/1B	16	1149	A	30
FTT549SPCW-S	49	G5	Cool White	4000	4315	85/1B	16	1449	A	30
FTT549SPDYLT-S	49	G5	Daylight	6400	3950	85/1B	16	1449	A	30
FTT580SPCW-S	80	G5	Cool White	4000	6160	85/1B	16	1449	A	40

Crompton Lamps shatterproof fluorescent tubes are coated in a special material with the sole purpose of fragment retention. A fluorescent tube breakage can put a costly stop to production, as well as obvious health risks that glass fragments can create. A common misconception is that the glass tube itself is shatterproof, when in fact it is the sleeve acting as an aid to glass retention. The material is either extruded or heat shrunk to a fluorescent lamp, acting as a glass collector should the lamp itself shatter.



G5 Cap



Experts in lighting since 1878

Foodsafe Shatterproof T5 Triphosphor




We now provide a range of fluorescent tube coatings for fragment retention. Our foodsafe coating, which is IEC 61549 compliant and also used for long life lamps is recognisable by a green band.

- 20,000 hour life
- 85/1B colour rendering index/group
- SPECTRA-PLUS Triphosphor
- 3500K white, 4000K cool white or 6500K daylight colour options
- Excellent colour rendering and high lumen maintenance
- Designed for use with High Frequency ballasts

Product Code	Watts (W)	Cap	Colour Appearance	Colour Temp (K)	Initial Lumens (lm)	Colour Rendering Index/Group	Dimensions (mm)		Energy Rating	Order Qty
							Dia	L		
High Efficiency (HE) Single Sleeve										
FTT514SPW-SF	14	G5	White	3500	1205	85/1B	16	549	A	30
FTT514SPCW-SF	14	G5	Cool White	4000	1205	85/1B	16	549	A	30
FTT514SPDYLT-SF	14	G5	Daylight	6500	1100	85/1B	16	549	A	30
FTT521SPW-SF	21	G5	White	3500	1900	85/1B	16	849	A+	30
FTT521SPCW-SF	21	G5	Cool White	4000	1900	85/1B	16	849	A+	30
FTT528SPW-SF	28	G5	White	3500	2605	85/1B	16	1149	A	30
FTT528SPCW-SF	28	G5	Cool White	4000	2605	85/1B	16	1149	A	30
FTT528SPDYLT-SF	28	G5	Daylight	6500	2400	85/1B	16	1149	A	30
FTT535SPW-SF	35	G5	White	3500	3300	85/1B	16	1449	A+	30
FTT535SPCW-SF	35	G5	Cool White	4000	3300	85/1B	16	1449	A+	30
FTT535SPDYLT-SF	35	G5	Daylight	6500	3050	85/1B	16	1449	A	30
High Output (HO) Single Sleeve										
FTT524SPW-SF	24	G5	White	3500	1755	85/1B	16	549	A	30
FTT524SPCW-SF	24	G5	Cool White	4000	1755	85/1B	16	549	A	30
FTT524SPDYLT-SF	24	G5	Daylight	6400	1600	85/1B	16	549	A	30
FTT539SPCW-SF	39	G5	Cool White	4000	3100	85/1B	16	849	A	30
FTT554SPCW-SF	54	G5	Cool White	4000	4450	85/1B	16	1149	A	30
FTT549SPCW-SF	49	G5	Cool White	4000	4315	85/1B	16	1449	A	30
FTT549SPDYLT-SF	49	G5	Daylight	6400	3950	85/1B	16	1449	A	30
FTT580SPCW-SF	80	G5	Cool White	4000	6160	85/1B	16	1449	A	40

Crompton Lamps shatterproof fluorescent tubes are coated in a special material with the sole purpose of fragment retention. A fluorescent tube breakage can put a costly stop to production, as well as obvious health risks that glass fragments can create. A common misconception is that the glass tube itself is shatterproof, when in fact it is the sleeve acting as an aid to glass retention. The material is either extruded or heat shrunk to a fluorescent lamp, acting as a glass collector should the lamp itself shatter.



G5 Cap



Experts in lighting since 1878