

LUXOMAT® PD3N-1C-SM/-FC Acoustic



■ TECHNICAL DATA

~ 10-240 V AC , 50 / 60 Hz

360°

Ø 10 m across

Ø 6 m towards

Ø 4 small movements

IP SM= IP44 FC= IP23 / Class II

-25 °C to +50 °C

Housing UV- and shock resistant polycarbonate

IR-PD3N, IR-PD-Mini

Channel 1 (control the lighting)

2300 W, $\cos \varphi = 1$

150 VA, $\cos \varphi = 0.5$

30 s - 30 min or pulse

10 - 2000 Lux





FC

FC

PRODUCT INFORMATION

- Remote controlled ceiling motion detector with integrated acoustic sensor
- One switching channel for operating the light
- Special optical system for detection of even the smallest movements
- Alarm pulse: protected triggering only if there are three movements recognised within 9 seconds

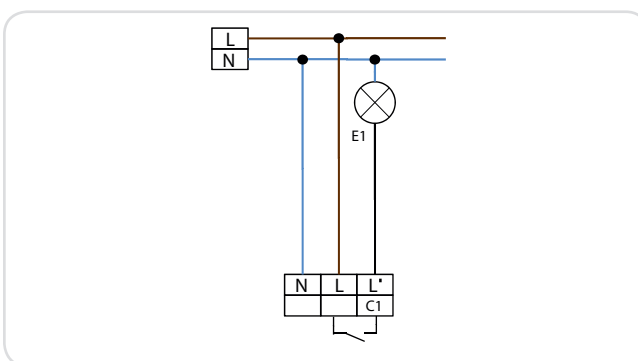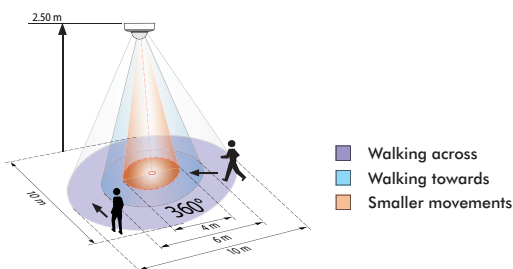

Description	Colour	Part number
PD3N-1C-FC Acoustic	white	92184
PD3N-1C-SM Acoustic	white	92219
Accessory (optional)		
IR-PD3N	grey	92105
IR-PD-Mini	grey	92159
Wire basket BSK (Ø 200 x 100)	white	92199