





DEC-LOCK

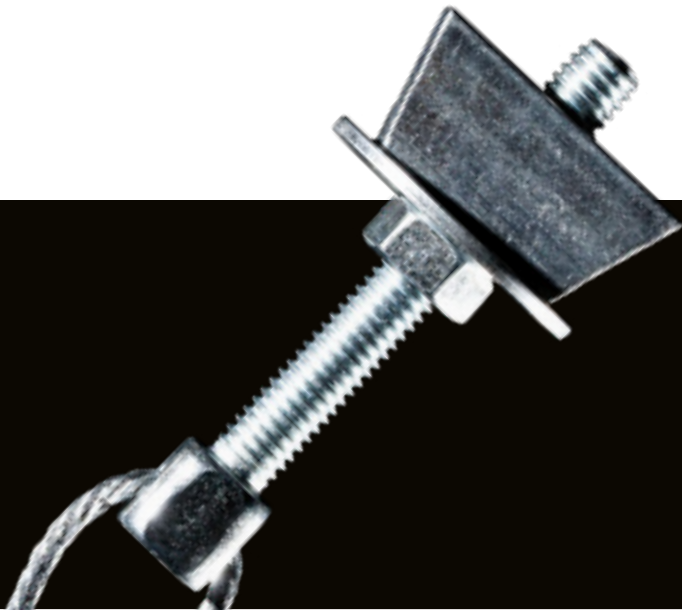

SUITABLE FOR:

Decking applications including:

- Kingspan
- Structural Metal Decks (SMD) and other steel decking manufacturers
- Concrete over metal rib-deck
- Please refer to opposite table for further details



The Specifics:

The range consists of a pre-determined length of wire from 1 metre to 10 metres with a choice of Safe Working Loads:

- G 15kg
- S 50kg

The system consists of wire and zip-clip device with a decking fixing termination.

The Applications

- Trunking and busbar solutions
- Trapeze bracket solutions
- Prefabricated module solutions
- Secondary light support solutions

The Features and Benefits

- Key free release system
- All components are fully assembled
- No onsite assembly required
- Lockable system, no drilling required
- Suitable where access to purlin is not available
- CNC engineered M6 x 45mm eyelet
- Trivalent zinc and clear passivated eyelet, nut and washer
- High tensile galvanised wire 1960 N/mm² grade 7 x 7 construction
- BSEN 12385 Standard
- Safety factor: 5:1

The Installation

- Push the deck wedge into decking profile and turn through 90 degrees
- Screw the eyebolt to the top of the decking profile
- Pass the wire through the zip-clip in the direction of the arrow
- Pass through or around your required suspension and back through the zip-clip leaving 15cm of wire protruding
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrows indicated

CODE	DESCRIPTION	SWL	PACK QTY
DLG1	1 Mtr decking suspension system	15kg	10
DLG2	2 Mtr decking suspension system	15kg	10
DLG3	3 Mtr decking suspension system	15kg	10
DLG4	4 Mtr decking suspension system	15kg	10
DLG5	5 Mtr decking suspension system	15kg	10
DLG10	10 Mtr decking suspension system	15kg	10
DLS1	1 Mtr decking suspension system	50kg	10
DLS2	2 Mtr decking suspension system	50kg	10
DLS3	3 Mtr decking suspension system	50kg	10
DLS4	4 Mtr decking suspension system	50kg	10
DLS5	5 Mtr decking suspension system	50kg	10
DLS10	10 Mtr decking suspension system	50kg	10

LINDAPTER FIXINGS ALSO AVAILABLE

CODE	DESCRIPTION	SWL	PACK QTY
MAAW/M6	AW Alphawedge M6	100kg	10
MAAW/M8	AW Alphawedge M8	100kg	10
MAMF60/M6	MF60 /decking fixing (met nut & bracket) M6	100kg	10
MAMF80/M8	MF60 /decking fixing (met nut & bracket) M8	100kg	10
MAMW2/M6	MW2 Multiwedge M6	100kg	10
MAMW2/M8	MW2 Multiwedge M8	100kg	10
MATR60/M6	TR60 wedge c/w locking plate – M6	100kg	10
MATR60/M8	TR60 wedge c/w locking plate – M8	100kg	10

SWL applicable to fixing ends only, Safety Factor 3:1

DECKING TYPE	STANDARD WEDGE: Size: 25mm (Top of Wedge) x 18mm (Base of Wedge) x 12mm (Width)	MINI WEDGE: Size: 19mm (Top of Wedge) x 12mm (Base of Wedge) x 9.5mm (Width)	MINI MINI WEDGE: Size: 18.5mm (top of Wedge) x 10mm (Base of Wedge) x 9.5mm (Width)
Richard Lees Holrib	•		
Richard Lees Super Holrib	•		
Quickspan Decking Q51	•		
Corus/Tata CF51	•		
Alpha Decking Alparib	•		
SMD R51	•		
Ward Multideck 50	•		
Corus/Tata NSD	•		
Kingspan Multideck 50-V2	•		
CMF Decking Metfloor 55	•		
Richard Lees Ribdeck 60 profile		•	
Quickspan Decking Q60		•	
Richard Lees Ribdeck 80 Profile			•
PMF Decking CF70			•