


CONSUMER UNIT PATTTRESSES

TOP/BOTTOM CABLE ENTRY

LEFT/RIGHT CABLE ENTRY

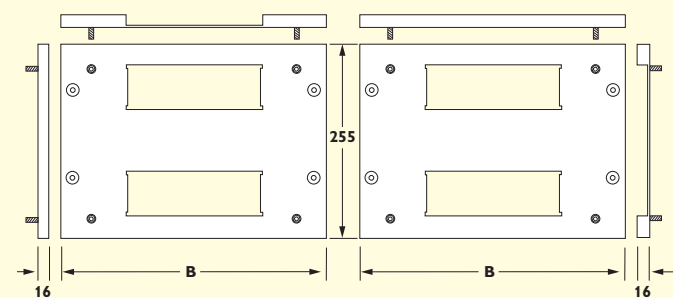

ENCLOSURE WIDTH (B)	PATTTRESS DEPTH	LEFT/RIGHT ENTRY	TOP/BOTTOM ENTRY
7 Module	16mm	MNSPE6670/1NR	MNSPE6584/1NR
10 Module	16mm	MNSPE6670/2NR	MNSPE6584/2NR
13 Module	16mm	MNSPE6670/3NR	MNSPE6584/3NR
16 Module	16mm	MNSPE6670/4NR	MNSPE6584/4NR
21 Module	16mm	MNSPE6670/5NR	MNSPE6584/5NR

For use with Crabtree All Metal consumer units. Allows surface cable entry through rear knockouts and automatically maintains enclosure IP rating to comply with BS7671 and BSEN61439-3 and the IET onsite guide.


Cable entry slot line up with rear knockouts, the minimum number of knockouts only should be removed for cable entry.

Suitable for use with trunking systems.

APPROXIMATE DIMENSIONS (mm)


LOADSTAR MINIATURE CIRCUIT BREAKERS

List No	A	B	C	D	E	F	G
6MSB__ & 6MSC__	90	18	45	6	44	70	3

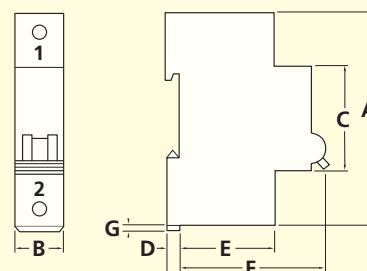

LOADSTAR RCBOs (SINGLE MODULE)

List No	A	B	C	D	E
6FSR__30B & 6FSR__30C	125	17.6	45	6.2	44

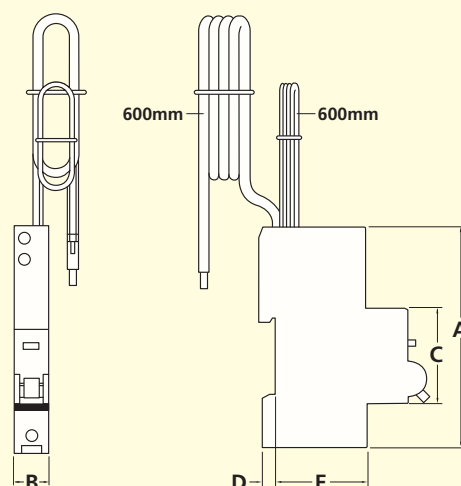

LOADSTAR RCBOs (DOUBLE MODULE)

List No	A	B	C	D	E
6FSNR__3/C	125	36	45	6.2	44

