

DATASHEET

FULTON


Fulton UGR<19 LED Panel 600x600 DD Dim 840

MS Light Guide Plate / Micro-Prismatic UGR<19 PS Diffuser
 ENEC Approved Flicker Free DALI Driver
 Loop In / Loop Out Mains Terminal Block



GENERAL INFORMATION	
Product Code	NFU/UGR19/66/DD/840
Product Range	LED Panels
Product Category	LED Panels
IP Rating	40
IK Rating	N/A
Warranty	5 Years Core
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=N/A, H=N/A
Dimensions Square/Rectangular (L x W x H) (mm)	L=595, W=595, H=9
Cut-out Size (mm)	N/A
Product Weight (Kg)	2.8
CONSTRUCTION	
Body Material	Aluminium / PC
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	3x2x2.5mm sq. Push In Terminal
Driver - Intergal or Remote	Remote
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	N/A
Power Consumption (W)	28.6
Efficacy	120
Operating Temp. (Min/Max)	-20°C to - 25°C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Correlated Rendering Index (CRI)	>80
Lumen Depreciation	L70 50000
SDCM	<5
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50
In Rush	26A @140us
Drivers per MCB*	B10=22 B16=36 C10=37 C16=60
Class	Class 2
Power Factor	>0.95
Cable Entry	Prewired
ELECTRICAL OUTPUT	
Forward Current (mA)	750
Forward Voltage (Vf)	34
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	Yes
OTHER	N/A
Switch Dim	Yes
Corridor Function	Yes
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943069237

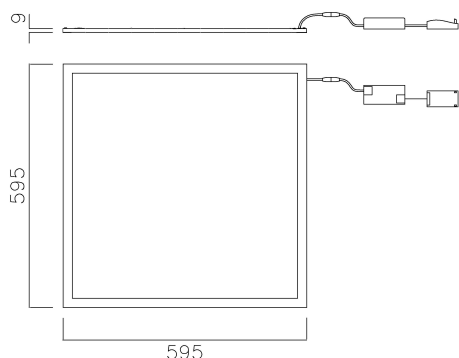

* GUIDE ONLY

