

## DATASHEET

### SPARTAN


Spartan LED IP65 Black Base M3 Lithium 830-40-50

IP65 Polycarbonate LED Bulkhead  
 Commercial Indoor And Outdoor Areas  
 Easy To Install



| GENERAL INFORMATION                            |                                |
|------------------------------------------------|--------------------------------|
| Product Code                                   | NSP/BK/M3/830-40-50            |
| Product Range                                  | Amenity                        |
| Product Category                               | Amenity                        |
| IP Rating                                      | 65                             |
| IK Rating                                      | IK10                           |
| Warranty                                       | 5 Years Core                   |
| DIMENSION/WEIGHT                               |                                |
| Dimensions Circular (DIA x H) (mm)             | DIA=Ø278, H=75                 |
| Dimensions Square/Rectangular (L x W x H) (mm) | L=0, W=0, H=N/A                |
| Cut-out Size (mm)                              | N/A                            |
| Product Weight (Kg)                            | 1.1                            |
| CONSTRUCTION                                   |                                |
| Body Material                                  | PC                             |
| Body Colour                                    | Black                          |
| Optical Material                               | N/A                            |
| Optical Finish                                 | N/A                            |
| Termination                                    | 5x2x1.5mm sq. Push In Terminal |
| Driver - Intergal or Remote                    | Integral                       |
| PACKAGING                                      |                                |
| Carton Dimensions (mm)                         | N/A                            |
| Quantity per Outer Carton                      | N/A                            |
| Total Weight inc. Carton (Kg)                  | N/A                            |

| LUMINAIRE PERFORMANCE            |                    |
|----------------------------------|--------------------|
| Energy Rating                    | N/A                |
| Luminaire Lumens (lm)            | N/A                |
| Power Consumption (W)            | 11.2               |
| Efficacy                         | 109                |
| Operating Temp. (Min/Max)        | -20°C to - 25°C    |
| LIGHT SOURCE                     |                    |
| Type                             | LED                |
| Correlated Colour Temp.          | 3000 / 4000 / 5000 |
| Correlated Rendering Index (CRI) | >80                |
| Lumen Depreciation               | L80 100000         |
| SDCM                             | <5                 |
| ELECTRICAL INPUT                 |                    |
| VOLTAGE (V)                      | 220-240V AC        |
| Operating Frequency              | 50                 |
| In Rush                          | <25A               |
| Drivers per MCB*                 | B10=16 B16=28      |
| Class                            | Class 1            |
| Power Factor                     | >0.95              |
| Cable Entry                      | Side / Back        |
| ELECTRICAL OUTPUT                |                    |
| Forward Current (mA)             | -                  |
| Forward Voltage (Vf)             | N/A                |
| EMERGENCY DATA                   |                    |
| Mode of Operation                | Maintained         |
| Battery Duration                 | 3 Hours            |
| Battery Type                     | LiFePO4            |
| Battery Specification            | 6.4V 1Ah           |
| Ballast Lumen Factor (BLF)       | 8.93               |
| DIMMING                          |                    |
| DALI                             | N/A                |
| OTHER                            | N/A                |
| Switch Dim                       | N/A                |
| Corridor Function                | N/A                |
| SENSORS                          |                    |
| Microwave                        | N/A                |
| PIR                              | N/A                |
| STANDARDS/APPROVALS              |                    |
| CE Marked                        | Yes                |
| Certificate of Conformity        | Yes                |
| Accreditations                   | N/A                |
| BARCODE                          |                    |
| EAN NUMBER                       | 5055943085183      |

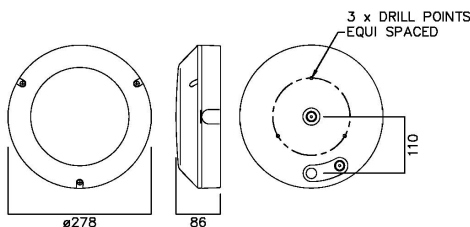

\* GUIDE ONLY

Image not found or type unknown

