


Indoor 180-R


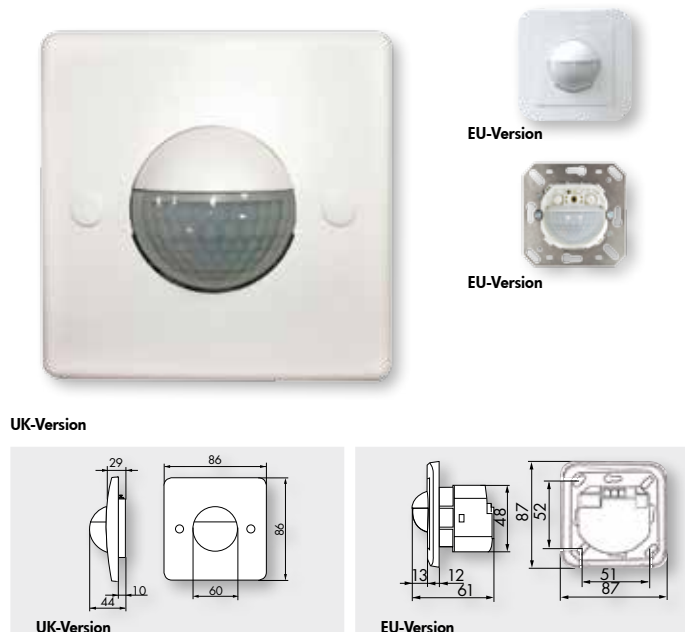


PRODUCT INFORMATION

- Wall occupancy detector with acoustic sensor
- Relay version with three-wire technology
- Noise automatically extends light-on time
- Available with surround (interior cover dimensions 60x60 mm) or without surround for use with faceplate (interior cover dimensions 50x50 mm) in 5 different colours
- Suitable (with adapter) for all common flush-mounted switch makes
- Push button manual switching available

TECHNICAL DATA

- ~ 110-240 V AC, 50 / 60 Hz
- ☂ 180°
- ☞ max. 10 m
- ⚠ 2.2m
- IP IP20 / Class II
- 🌡 -25 °C to +50 °C
- 📦 Housing UV- and shock resistant polycarbonate
- Channel 1 (control the lighting)**
- ⚡ 2300 W, $\cos \varphi = 1$
1150 VA, $\cos \varphi = 0.5$
- 🕒 15 s - 16 min or pulse
- ☀ 2 - 2000 Lux

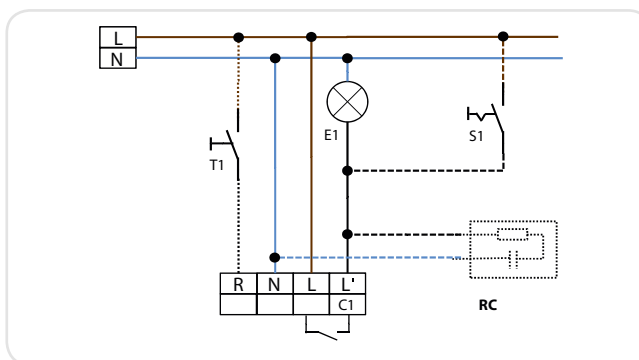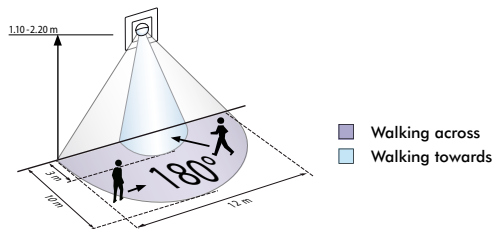

Description	Colour	Part number
Indoor 180-R, covering included (UK version)	pure white, RAL 9010	92610
Indoor 180-R, covering included (European version)	pure white, RAL 9010	92623
Indoor 180-R, covering not included (European version)	-	92665
Accessory (optional)		
SM-Socket for Indoor 180	pure white	92141
Protection against vandalism for Indoor 180	-	92018
Centre plate for modular push button (angled corners)	white	35126
Centre plate for modular push button (rounded corners)	white	35127