

Egaflex

Corrugated
PVCu
ConduitAdaptor
Nylon

The Egaflex PVCu conduit range is a corrugated flexible system which can be used for the connection of vibrating equipment or to provide tight bends for interconnecting conduits. The range can be surface mounted or cast-in concrete and can also be used with standard conduit fittings.

Manufactured in accordance with:

BS EN 61386-1

BS EN 61386-22

MATERIAL:


PVCu

COLOUR:

White

STANDARD LENGTH:

50 metres coil.

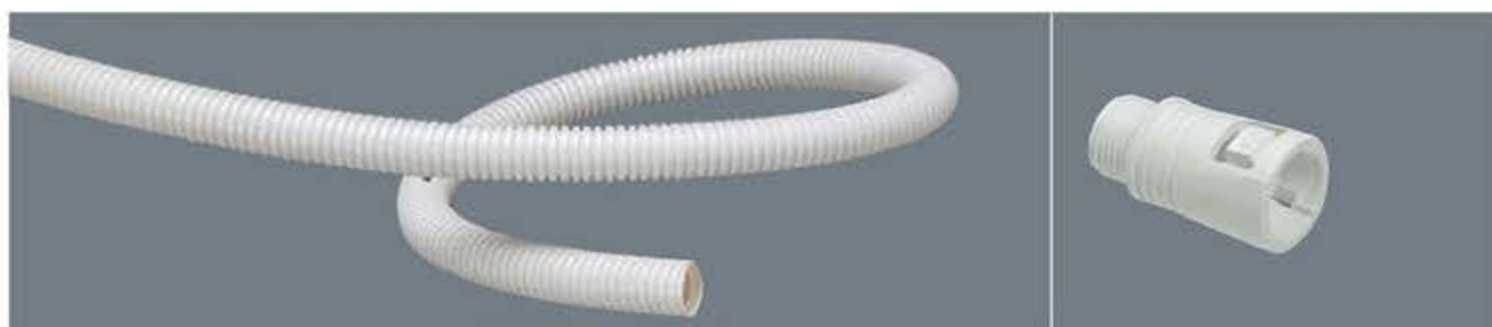

16mm	EF1WHI	50m Coil	FAB1WHI	50
20mm	EF2WHI	50m Coil	FAB2WHI	50
25mm	EF3WHI	50m Coil	FAB3WHI	50

Rectangular
Channelling

2 METRE LENGTHS

WALL THICKNESS:

0.9mm

MATERIAL:

PVCu

COLOUR:

White

STANDARD LENGTH:

2 metres

Other lengths can be supplied against quantity orders.



12mm	(8mm depth approx)	REC1WHI	150m
25mm	(8mm depth approx)	REC2WHI	150m
38mm	(9.5mm depth approx)	REC3WHI	150m