



# **CorePro LEDspot LV**



## CorePro LED spot ND 7-50W MR16 830 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots. LEDlamps deliver huge energy savings and minimize maintenance cost.

#### **Product data**

General Information	
Cap base	GU5.3 [ GU5.3]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	50,000X
Technical type	7-50W
	Narrow Cone
Light Technical	
Colour Code	830 [ CCT of 3,000 K]
Beam Angle (Nom)	36 °
Luminous flux (nom.)	621 lm
Luminous intensity (nom.)	1400 cd
Colour designation	White (WH)
Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	88.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	621 lm
Operating and Electrical	
Input frequency	- Hz

Power (Rated) (Nom)	7 W
Lamp current (nom.)	730 mA
Wattage equivalent	50 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.8
Voltage (Nom)	12 V
Temperature	
T-Case maximum (nom.)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb shape	MR16 [ 2inch/50mm]
Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	7 kWh
	465222


Datasheet, 2021, August 27 data subject to change

## CorePro LEDspot LV

Product Data	
Full product code	871869681477200
Order product name	CorePro LED spot ND 7-50W MR16 830 36D
EAN/UPC – product	8718696814772
Order code	81477200
SAP numerator – quantity per pack	1

Numerator – packs per outer box	10
SAP material	929001904902
SAP net weight (piece)	0.034 kg

### Dimensional drawing




MR16 12V 8W-50W 621lm 36D 3000K GU5.3 ND


## Product D C CorePro LED spot ND 7-50W MR16 830 36D 50.5 mm 45 mm


### Photometric data

100


200







## LEDspot Corepro 7-50W GU5.3 MR16 827 36D ND



500

600

LEDspot Corepro 7-50W GU5.3 MR16 830 36D ND


400


300

 $\lambda [nm] \xrightarrow{800}$ 

### CorePro LEDspot LV

### Lifetime

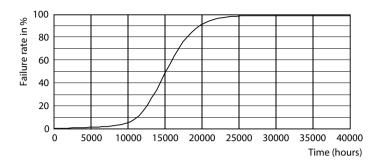



LEDspot Corepro 7-50W GU5.3 MR16 827 36D ND

LEDspot Corepro 7-50W GU5.3 MR16 827 36D ND

