



MASTER Value GLASS LED bulbs



MASTER VLE EDBulbDT5.9-60W B22 927 ST64CL G

Featuring a classic heritage design, classic filament LED lamps combine the familiar shapes of incandescent bulbs with the benefits of the long-lasting LED technology. The product offers more energy saving compared with normal LED bulbs, and also provides the customer with a good light experience and superior dimming performance. MASTER Value Glass Led Bulbs deliver significant energy savings, offering 30% more compared to normal LEDs. They provide excellent quality of light. By offering a lifetime of 15,000 hours, they reduce maintenance costs.

Product data

General Information	
Cap base	B22 [B22]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	20,000X
	Sphere
Light Technical	
Colour Code	922-927 [CCT of 2,200 K-2,700 K]
Luminous flux (nom.)	806 lm
Colour designation	Warm Glow (WG)
Correlated Colour Temperature (Nom)	2200 2700 K
Luminous efficacy (rated) (nom.)	136.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	90


LLMF at end of nominal lifetime (nom.) 70 %	
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	5.9 W
Lamp current (nom.)	40 mA
Wattage equivalent	60 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.6
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	70 °C

MASTER Value GLASS LED bulbs

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	ST64
Approval and Application	
Energy Efficiency Class	D
Energy consumption kWh/1,000 hours	6 kWh
	453251

Product Data	
Full product code	871951432483100
Order product name	MASTER VLE EDBulbDT5.9-60W B22 927 ST64CL G
EAN/UPC – product	8719514324831
Order code	32483100
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929003010802
SAP net weight (piece)	0.048 kg


Dimensional drawing




Bulb ST64 EU 6-60W 810lm WG B22 CL

Product	D	C
MASTER VLE EDBulbDT5.9-60W B22 927 ST64CL G	64 mm	139 mm

Photometric data

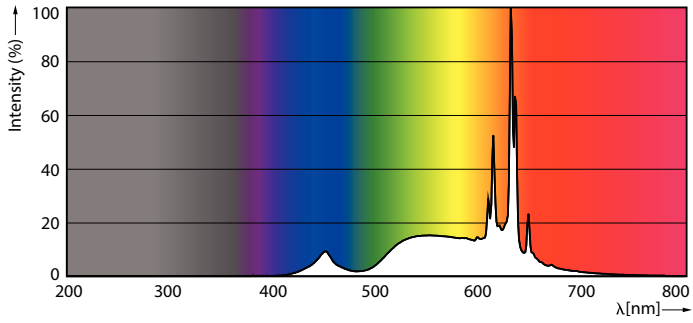


LEDbulb MAS SLR 5,9W A60 E27 927 CL-POC



LEDbulb MAS SLR ST64 5,9W E27 927 CL-LDD

MASTER Value GLASS LED bulbs



Photometric data



Calicut Petroleum 4.5	Polys Lighting 0.5	Page 17
-----------------------	--------------------	---------

LEDbulb MAS SLR 5,9W ST64 B22 927 CL-GUL

Lifetime

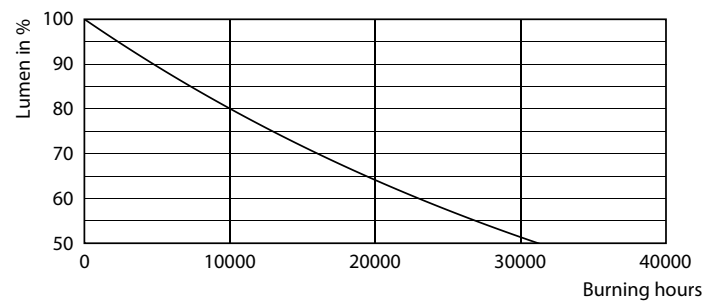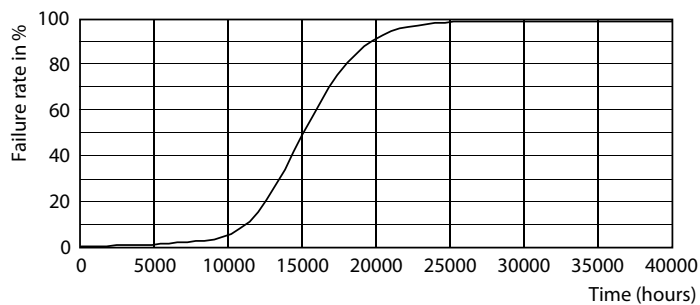

15K LED

15K LMP

