



# TL-X XL



## TL-X XL 40W/33-640 SLV/25

Single-pin low-pressure mercury discharge lamps with a tubular 38 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

| General Information                   |                 |
|---------------------------------------|-----------------|
| Cap base                              | FA6 [ FA6]      |
| Life to 10% failures (nom.)           | 21000 h         |
| Life to 50% failures (nom.)           | 26000 h         |
|                                       | Sphere          |
| Light Technical                       |                 |
| Colour Code                           | 33-640          |
| Luminous flux (nom.)                  | 2300 lm         |
| Colour designation                    | Cool White (CW) |
| Lumen maintenance 10,000 hours (nom.) | 0 %             |
| Lumen maintenance 2,000 hours (nom.)  | 88 %            |
| Lumen maintenance 5,000 hours (nom.)  | 83 %            |
| Chromaticity coordinate X (nom.)      | 0.38            |
| Chromaticity coordinate Y (nom.)      | 0.38            |
| Correlated Colour Temperature (Nom)   | 4000 K          |
| Luminous efficacy (rated) (nom.)      | 58 lm/W         |
| Colour rendering index (nom.)         | 60              |
| Operating and Electrical              |                 |
| Power (Rated) (Nom)                   | 40.0 W          |


| Lamp current (nom.)                | 0.430 A                   |
|------------------------------------|---------------------------|
| Voltage (Nom)                      | 103 V                     |
| Controls and Dimming               |                           |
| Dimmable                           | Yes                       |
| Mechanical and Housing             |                           |
| Bulb shape                         | T12 [ 38 mm (T12)]        |
| Approval and Application           |                           |
| Energy Efficiency Class            | G                         |
| Mercury (Hg) content (max.)        | 12 mg                     |
| Mercury (Hg) content (nom.)        | 12.0 mg                   |
| Energy consumption kWh/1,000 hours | 40 kWh                    |
|                                    | 423515                    |
| Product Data                       |                           |
| Full product code                  | 871150026137340           |
| Order product name                 | TL-X XL 40W/33-640 SLV/25 |
| EAN/UPC – product                  | 8711500261373             |
| Order code                         | 26137340                  |

## TL-X XL

|                                   |              |
|-----------------------------------|--------------|
| Local order code                  | TLX4033XL    |
| SAP numerator – quantity per pack | 1            |
| Numerator – packs per outer box   | 25           |
| SAP material                      | 928037903332 |

|                        |                      |
|------------------------|----------------------|
| SAP net weight (piece) | 233.000 g            |
| ILCOS code             | FD-40/41/2B-LC/N-Fa6 |


### Dimensional drawing

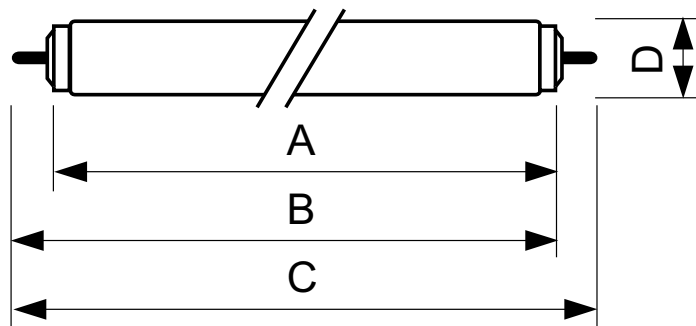

| Product                      | D (max) | A (max)   | B (max) | B (min)   | C (max)   |
|------------------------------|---------|-----------|---------|-----------|-----------|
| TL-X XL 40W/33-640<br>SLV/25 | 40.5 mm | 1183.5 mm | 1202 mm | 1198.5 mm | 1220.5 mm |

TL-X XL 40W/33-640

### Photometric data

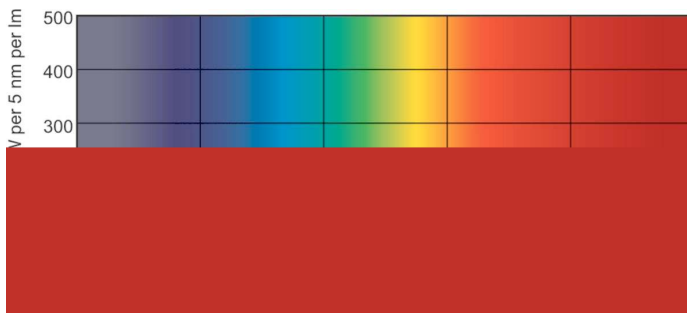

Lightcolour /33-640

Lightcolour /33-640

