


AA-M

ALUMINIUM TERMINALS

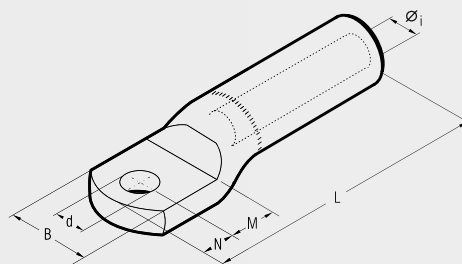

AA-M series terminals are made from Aluminium of a purity equal to or greater than 99,5%.

They are designed to accept a variety of conductor forms especially low stranded compacted conductors.

Non circular conductors may require pre-rounding prior to introduction to the terminal.

Barrels are capped and filled with grease so as to avoid oxidation of the Aluminium.

Details of the appropriate crimping tools and dies are shown on page 185.

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Hydraulic Tools		
			Øi	B	M	N	L	d				
16	8	AA 16-M 8	5,5	21	13	11	77,0	8,4	60/3	HT 131UC B 1300UC	RHU 131-C	
25	8	AA 25-M 8	6,5	21	13	11	77,0	8,4	60/3			
35	8	AA 35-M 8	8,0	23	13	11	77,5	8,4	60/3			
	10	AA 35-M 10	8,0	23	13	11	77,5	10,5	60/3			
50	12	AA 50-M 12	9,0	26	16	14	91,0	13,2	60/3			
	14	AA 50-M 14	9,0	26	18	16	95,0	15,0	60/3			
70	12	AA 70-M 12	11,0	27	16	14	91,0	13,2	45/3			
	14	AA 70-M 14	11,0	27	18	16	95,0	15,0	45/3			
95	12	AA 95-M 12	12,5	27	16	14	91,0	13,2	45/3			
	14	AA 95-M 14	12,5	27	18	16	95,0	15,0	45/3			
120	12	AA 120-M 12	13,7	35	16	14	115,0	13,2	30/3			
	14	AA 120-M 14	13,7	35	18	16	119,0	15,0	30/3			
150	12	AA 150-M 12	15,5	34	16	14	115,0	13,2	30/3	HT 131UC B 1300UC	RHU 131-C	
	14	AA 150-M 14	15,5	34	18	16	119,0	15,0	30/3			
185	12	AA 185-M 12	17,0	42	20	14	122,0	13,2	18/3			
	14	AA 185-M 14	17,0	42	22	16	126,0	15,0	18/3			
240	12	AA 240-M 12	19,5	44	20	14	122,0	13,2	15/3			
	14	AA 240-M 14	19,5	44	22	16	126,0	15,0	15/3			
300	12	AA 300-34 M 12	22,5	47	22	14	130,0	13,2	15/3			
	14	AA 300-34 M 14	22,5	47	22	16	132,0	15,0	15/3			
	16	AA 300-34 M 16	22,5	47	22	17	133,0	17,0	15/3			
	16	AA 300-M 16	23,3	54	19	17	172,0	17,0	12/3			
400	16	AA 400-M 16	26,0	56	19	17	172,0	17,0	12/3	HT120 HT131-C RHC 131	ECW-H3D	RHU 230-630
500	16	AA 500-40 M 16	29,1	57	22	19	177,0	17,0	12/3			
630	16	AA 630-M 16	32,5	70	22	19	177,0	17,0	9/3			

