

Cable Management

Polypropylene Corrugated Conduit




FCP series corrugated conduit is a very economical solution for a variety of applications due to its high flexibility, compression strength and colour range.

Suitable for embedding into floors and walls, the FCP series is often used for cable assemblies, underfloor wiring and cable tidying.

Features:

- Made from polypropylene
- Temperature range from -40°C to +120°C
- Black in all sizes, colours available in 20, 25 and 32mm only
- LSZH (Low Smoke Zero Halogen), UL resistant
- IP54

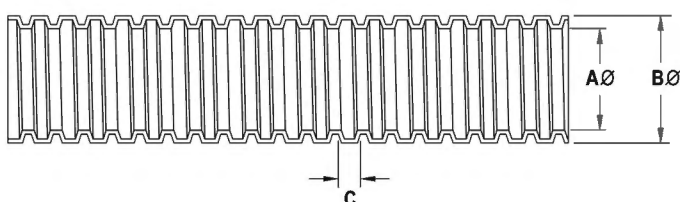

Install Instruction



Step 1: Insert the conduit into the adapter



Step 2: Push lock out



Step 3: Turn it around for locking

Part No.	Trade Size (mm)	Internal Diameter (mm)	External Diameter(mm)	Coil Size (m)	Adaptors	Pack Qty
FCP16-100	16	10.7	16.0	100	FCA-16PN	50
FCP20-100	20	16.8	20.0	100	FCA-20PN	50
FCP25-100	25	19.9	25.0	100	FCA-25PN	50
FCP32-50	32	26.5	32.0	50	FCA-32PN	50

The above part numbers are based on black colour. For other colours, suffix part number with -W (white), -G (grey), -OR (orange), -GN (green), -Y (yellow) e.g. FCP20-W. Available with matching colour adapters. Please note that colours are only available for 20mm, 25mm and 32mm



Standard Conduit

Flexible Conduit Contractor Pack



Contractor Pack

Part No.		Dimensions mm			Pack Contents
Nylon	Polyprop.	A Ø	B Ø	C	
FCN20-PK10	FCP20-PK10	14.1	20.0	3.70	10m + 10 adaptors
FCN25-PK10	FCP25-PK10	18.3	25.0	4.10	10m + 10 adaptors

Standard colour: Black. Also available in white.