

LED power and locator indicators

Power indicator Cat. No. 7300 58 (red) and locator indicator Cat. No. 7301 58 (green)

These LED packs can be fitted as an option to a range of Synergy White functions including :


- 10 A switches 1 gang
- 5 A, 13 A and 15 A socket outlets
- 13 A connection units
- 20 A and 45 A double pole control switches

The LED packs are wired in alternative ways for different functionality. Factory fitted LEDs can be re-configured on site


Sample wiring schemes

Switch 10 A

Green LED locator




Red LED power indicator




Socket 13 A switched

Green LED locator




Red LED power indicator



Socket 13 A unswitched


Green LED locator




Cable outlet options : 13 A connection units and 20 A double pole control switches

These devices are available in three cable outlet variants :


- Without provision for an external cable outlet (i.e. for internal cabling)
- With a cable outlet in the front plate supplied with an integral screw type cable clamp and outlet cover plug
- With a bottom cord outlet on a deep plate




13 A fused connection unit
no external cable outlet



13 A fused connection unit
with front cable outlet



13 A fused connection unit
with deep plate and bottom
cable outlet

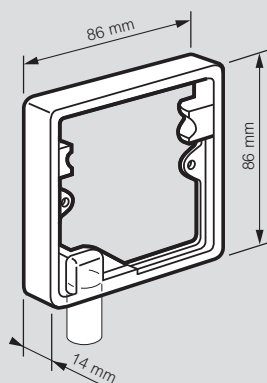

Additionally the use of cord outlet accessory box Cat. No. 7300 53, enables a flush-to-wall cable outlet option
The outlet box dimensions are nominally 86 x 86 mm and 14 mm deep
The outlet box is supplied with the necessary longer installation screws and has an integral automatic cable restraint